

**Fort Hall Mine Landfill**  
*1500 North Fort Hall Mine Road*  
*Pocatello, Idaho*

**FINAL**

**2024 Offsite Groundwater Monitoring Report**

***PREPARED FOR:***

Bannock County  
624 E Center Street  
Pocatello, Idaho 83204

***PREPARED BY:***

CDM Smith  
560 North Park Avenue, Suite 300  
Helena, MT 59601

January 2026



# Table of Contents

<b>Section 1 Introduction .....</b>	<b>1-1</b>
1.1 Purpose of the Report.....	1-1
1.2 Site Background .....	1-2
1.2.1 Site Location and Use .....	1-2
1.2.2 COC Discharge from the FHML to the PVA.....	1-2
1.2.3 Site Geology .....	1-2
1.2.4 Site Hydrogeology.....	1-3
1.2.5 Offsite Monitoring and Domestic Well Network.....	1-4
1.2.6 COC Fate and Transport .....	1-5
1.3 Report Organization .....	1-6
<b>Section 2 2024 Offsite Field Sampling Activities.....</b>	<b>2-1</b>
2.1 Private Property Access.....	2-1
2.1.1 City Monitoring Well Access.....	2-1
2.1.2 Domestic Well Access .....	2-1
2.1.3 Municipal Supply Well Access .....	2-1
2.2 Groundwater Sampling.....	2-1
2.2.1 Groundwater Elevation Measurements .....	2-2
2.2.2 Sampling Procedures.....	2-2
2.2.2.1 Tap Sampling.....	2-3
2.2.2.2 HydraSleeve Sampling .....	2-3
2.2.3 Sample Analysis .....	2-3
2.3 Decontamination and Investigation-Derived Waste .....	2-3
2.4 Deviations .....	2-4
2.4.1 City of Pocatello Monitoring Wells .....	2-4
2.4.2 Domestic Wells.....	2-4
2.4.3 City of Pocatello Municipal Supply Wells.....	2-5
<b>Section 3 Groundwater Monitoring Results.....</b>	<b>3-1</b>
3.1 Data Usability Assessment.....	3-1
3.1.1 Precision .....	3-1
3.1.2 Accuracy.....	3-1
3.1.3 Comparability .....	3-2
3.1.4 Completeness.....	3-2
3.1.5 Sensitivity.....	3-2
3.2 Sampling Results.....	3-2
3.2.1 VOCs.....	3-2
3.2.1.1 City Municipal Supply Wells.....	3-2
3.2.1.2 Domestic Wells.....	3-2
3.2.1.3 City of Pocatello Monitoring Wells .....	3-3
3.2.2 Geochemical Parameters .....	3-3
3.2.2.1 Specific Conductance .....	3-3
3.2.2.2 pH.....	3-3
3.2.2.3 Redox Conditions .....	3-3

<b>Section 4 Data Analysis.....</b>	<b>4-1</b>
4.1 Plume Extent.....	4-1
4.2 Statistical Analysis of PCE and TCE.....	4-2
4.2.1 Statistical Approach.....	4-2
4.2.2 City Municipal Supply Wells.....	4-3
4.2.3 City Monitoring Wells.....	4-3
4.2.4 Domestic Wells.....	4-3
<b>Section 5 Screening-Level Risk Assessment .....</b>	<b>5-1</b>
5.1 Current and Potential Future Uses of Groundwater.....	5-2
5.2 HHRA Approach.....	5-3
5.2.1 HHRA Data Evaluation/Hazard Identification.....	5-3
5.2.2 Toxicity Assessment.....	5-4
5.2.2.1 Overview.....	5-4
5.2.2.2 Noncancer Effects.....	5-4
5.2.2.3 Cancer Effects.....	5-5
5.2.3 Toxicity Values.....	5-6
5.2.4 Exposure Assessment.....	5-6
5.2.4.1 Site Conceptual Exposure Model.....	5-6
5.2.4.2 Exposure Assessment.....	5-8
5.3 Risk Characterization for Groundwater.....	5-8
5.4 Risk Characterization for Indoor Air.....	5-9
5.5 Risk Characterization for Fruits and Vegetables.....	5-10
5.6 Total Human Health Risk.....	5-10
5.7 Uncertainty Analysis.....	5-11
5.7.1 Exposure Assessment.....	5-11
5.7.2 Risk Characterization.....	5-11
5.7.3 Pathways Not Evaluated Quantitatively.....	5-12
5.7.4 Conclusions.....	5-12
5.8 Ecological Risk Evaluation.....	5-12
5.8.1 Terrestrial Plant Exposures and Risks.....	5-13
5.8.2 Terrestrial Bird/Mammal Exposures and Risks.....	5-13
<b>Section 6 Conclusions and Recommendations .....</b>	<b>6-1</b>
6.1 Results of Offsite and Domestic Well Monitoring.....	6-1
6.2 Screening-Level Risk Assessment.....	6-1
6.3 Recommendations for 2025 City and Domestic Well Monitoring.....	6-2
6.3.1 Groundwater Sampling and Analysis.....	6-2
6.3.2 Evaluate Risk.....	6-3
<b>Section 7 References .....</b>	<b>7-1</b>

## List of Figures

Figure 1-1	Site Location Map
Figure 1-2	Offsite City and Domestic Groundwater Wells
Figure 1-3	Historical Maximum TCE Plume
Figure 2-1	Offsite City and Domestic Wells Sampled in Summer 2024
Figure 3-1	2024 Chlorinated Ethene Results for City Wells
Figure 3-2	2024 Chlorinated Ethene Results for Domestic Wells – North
Figure 3-3	2024 Chlorinated Ethene Results for Domestic Wells – South
Figure 4-1	Tetrachloroethene: Current Plume Extent and Trends Analysis
Figure 4-2	Trichloroethene: Current Plume Extent and Trends Analysis
Figure 5-1	Domestic Water Source Inventory Area Parcel and Well Information
Figure 5-2	Lower PVA Domestic Water Source Inventory Area Parcel and Well Information Showing Current Trichloroethene and Tetrachloroethene Results
Figure 5-3	Site Conceptual Exposure Model Pathway

## List of Exhibits

Exhibit 5-1	Toxicity Assessment – Cancer Effect
-------------	-------------------------------------

## List of Tables

Table 2-1	Offsite Well Completion Details
Table 2-2	2024 Offsite Groundwater Sampling Information
Table 3-1	Municipal Supply Wells VOCs and Field Parameter Results
Table 3-2	Domestic Wells VOCs and Field Parameter Results
Table 3-3	Pocatello City Monitoring Wells VOCs and Field Parameter Results
Table 4-1	City Supply Wells Statistical Results – PCE and TCE
Table 4-2	City Monitoring Wells Statistical Results – PCE and TCE
Table 4-3	Domestic Wells Statistical Results – PCE and TCE
Table 5-1	Human Health Chemicals of Potential Concern Selection
Table 5-2	Human Health Reasonable Maximum Exposure Parameters
Table 5-3	Human Health Groundwater Non-Cancer Hazard Evaluation
Table 5-4	Human Health Vapor Intrusion Non-Cancer Hazard Evaluation
Table 5-5	Human Health Total Non-Cancer Hazard Quotients – 2024
Table 5-6	Ecological Chemicals of Potential Concern Selection
Table 6-1	2025 Annual Offsite Sampling Plan

## Appendices

Appendix A	2024 Annual Offsite Sampling Plan
Appendix B	Field Documentation
Appendix C	Historical Groundwater Results
Appendix D	Data Usability Assessment Report

Appendix E Analytical Laboratory Data Packages  
 Appendix F Time Series Plots

## Abbreviations

µg/L	micrograms per liter
alluvium	alluvial sediments
bgs	below ground surface
BHHRA	baseline human health risk assessment
CF	confidence factor
cis-1,2-DCE	cis-1,2-dichloroethene
City	City of Pocatello
COC	chemical of concern
COPCs	chemicals of potential concern
CSIA	compound-specific isotope analysis
DO	dissolved oxygen
DWSIA	domestic water source inventory area
EcoSSL	EPA's Ecological Soil Screening Levels
EPA	U.S. Environmental Protection Agency
FHML	Fort Hall Mine Landfill (the Site)
HI	hazard index
HQ	hazard quotient
IDGW	Idaho Groundwater Rule
IDEQ	Idaho Department of Environmental Quality
IRIS	Integrated Risk Information System
IUR	inhalation unit risk
J	estimated result
LANL	Los Alamos National Laboratory
LCS/LCSD	laboratory control sample/laboratory control sample duplicate
LDS	Latter-Day Saints (The Church of Jesus Christ of Latter-Day Saints)
LOAEL	Lowest-observed-adverse-effect level
LPRV	Lower Portneuf River Valley
mg/L	milligrams per liter
MCL	maximum contaminant level
MS/MSD	matrix spike/matrix spike duplicate
µS/cm	microsiemens per centimeter
MW	monitoring well
NCEA	National Center for Environmental Assessment
NOAEL	no-observed-adverse-effect level
ORP	oxidation-reduction potential
%	percent
p-value	probability value
PA	City of Pocatello monitoring well
PCE	tetrachloroethene
PPRTV	Provisional Peer Reviewed Toxicity Values

PVA	Portneuf Valley Aquifer
QAPP	Quality Assurance Project Plan
RAGS	EPA's Risk Assessment Guidance for Superfund
RfC	reference concentration
RfD	reference dose
RL	reporting limit
RME	reasonable maximum exposure
RPD	relative percent difference
RSL	regional screening levels
RW	domestic well
SCEM	site conceptual exposure model
S/D	shallow/deep (well)
SF	slope factor
Site, the	Fort Hall Mine Landfill
SLERA	screening-level ecological risk evaluation
SLRA	screening-level risk assessment
SOP	standard operating procedure
TCE	trichloroethene
U	nondetect result
UJ	estimated nondetect result
UF	uncertainty factor
VC	vinyl chloride
VISL	vapor intrusion screening level
VOC	volatile organic compound
WOE	weight of evidence
YSI	Yellow Springs Instruments Pro Digital Sampling System

This page intentionally left blank.

# Section 1

## Introduction

Under Task Order No. 12 of the Bannock County Master Services Agreement contract executed on July 24, 2018, CDM Smith was tasked with implementing a groundwater sampling program at select monitoring, remediation, and domestic wells to evaluate a chemical of concern (COC) plume emanating from the Fort Hall Mine Landfill (FHML) (the Site) in accordance with the current consent order between Bannock County and Idaho Department Environmental Quality (IDEQ) (IDEQ 2016). Field activities, laboratory results, data validation, and updated COC distribution and statistical trends are presented herein.

### 1.1 Purpose of the Report

The 2024 annual offsite groundwater sampling event (conducted on city and residential properties surrounding the Fort Hall Mine Landfill) was conducted in accordance with the *Final Fort Hall Mine Landfill, Groundwater Monitoring Program Plan Quality Assurance Project Plan (QAPP)*, dated May 25, 2021 (CDM Smith 2021a). The overall purpose of the 2024 offsite monitoring event was to assess the impacts of COCs leaching to groundwater from the FHML to the Portneuf Valley Aquifer (PVA), and to evaluate risks to human health and the environment.

The purpose of this report is to:

- Present the analytical and field data collected during the 2024 offsite groundwater sampling event.
- Update the lateral trichloroethene (TCE) groundwater plume extent downgradient of the FHML.
- Evaluate COC trends in offsite City of Pocatello (City) monitoring wells and domestic supply wells with sufficient data to conduct statistical analysis.
- Update the screening-level risk assessment (SLRA) to evaluate potential human health risks due to the following:
  - Use of groundwater as the sole source of household water.
  - Potential vapor intrusion into residences located above contaminated groundwater.
  - Use of groundwater as a source of domestic water for irrigation.
- Update the screening-level ecological risk evaluation (SLERA) to evaluate potential ecological risks due to ingestion of groundwater that may be used to provide drinking water for animals.
- Provide recommendations for the 2025 City and domestic well monitoring program.

## 1.2 Site Background

The following sections briefly describe site history and use, COC discharge from the FHML, geology and hydrogeology, fate and transport of COCs, and the offsite FHML monitoring well network.

### 1.2.1 Site Location and Use

The Site is located on North Fort Hall Mine Road in Bannock County, Idaho, approximately 7 miles southeast and hydrologically upgradient of the City of Pocatello (**Figure 1-1**). The landfill is alternately known as the Fort Hall Canyon Landfill or Bannock County Landfill (IDEQ 2016) and has received hazardous and nonhazardous waste since 1943. More information pertaining to site history and use within the FHML property boundary can be found in recent semiannual reports (CDM Smith 2024a, 2024b).

### 1.2.2 COC Discharge from the FHML to the PVA

**Figure 1-2** shows the offsite area (i.e., area outside of the FHML boundary) and offsite monitoring wells. In October 1991, TCE contamination was identified in monitoring wells installed immediately downgradient of FHML Cell 1 (Brown and Caldwell 1992). By 1993, high concentrations of TCE were observed in downgradient domestic wells within the PVA, and two municipal supply wells (Muni-Well-14 and Muni-Well-33, shown on **Figure 1-2**) were subsequently closed because of TCE concentrations (Brown and Caldwell 1994). Within the domestic wells (designated with “RW”), TCE exceeded the groundwater maximum contaminant level (MCL) drinking water standards, with the highest concentrations of 290 micrograms per liter ( $\mu\text{g/L}$ ) observed in RW-2076F.

Approximately 45 domestic wells have been sampled since 1991 at varying frequency. **Figure 1-3** presents the maximum extent of the TCE plume using the highest concentrations observed to date for statistical kriging used to estimate the boundaries of the plume (Section 4.1 provides a more detailed description of the kriging). Although the greatest impacts from COC discharging from the FHML to the PVA were observed in the 1990s, the subsequent extent of the COC plume and concentration trends indicate that impacts continue, with several domestic wells currently exceeding the MCL for TCE.

### 1.2.3 Site Geology

In the vicinity of the FHML, Quaternary valley fill deposits of loess and silty gravels are found within the Fort Hall Canyon, which grade into alluvial fan deposits extending northward from the mouth of Fort Hall Canyon. The alluvial deposits consist of stream channel and alluvial fan deposits that are interbedded, discontinuous units of sand, gravel, silt, and clay. Coarse materials are generally subangular to subrounded fragments of red to green metaquartzite and argillite. Interstitial materials are slightly to moderately plastic, light- to medium-brown silt and clay. The alluvial fan deposits grade into the Lower Portneuf River Valley (LPRV) fill deposits that predate Upper Gravels from the Bonneville flood event and form the benches along the southwestern edge of the valley. The nature of the lateral and vertical grading between the three sedimentary deposits is unclear at this time. These sedimentary deposits all overlie, and are derived from, the Tertiary Starlight Formation (AEEC 2018).

The base of Fort Hall Canyon intersects the LPRV. Six lithologic groups have been defined in the southern portion of the LPRV (Welhan et al. 1996):

- Bedrock, of variable composition but dominated by pink to white quartzite and varicolored shale or argillite, predominantly of Proterozoic age (Caddy Canyon Formation).
- Middle to late Tertiary basin-filling sediments and volcanoclastics of the Starlight Formation.
- Quaternary valley fill and alluvial deposits composed of non-indurated silty gravels and cobbles with lenses of sand, silt, and intercalated clays.
- Portneuf basalt deposited along the eastern edge of the LPRV.
- Coarse-grained clean gravel and cobbles in the center of the LPRV, known as the Upper Gravels (equivalent to the Michaud Gravels in the northern LPRV), deposited by the Bonneville Flood event and which comprise the most productive portion of the underlying LPRV aquifer.
- A silt “mantle” of variable thickness (0 to 43 feet) overlying the Upper Gravels, originating from overbank flood material from periodic Portneuf River flooding.

Seismic refraction geophysical surveys were conducted by Brown and Caldwell as part of the initial site investigations at the mouth of Fort Hall Canyon in 1992 and 1993 (Brown and Caldwell 1992, 1994). The presence of a basin and range-type normal fault that strikes slightly west of north through Fort Hall Canyon was confirmed. This fault was originally identified as a thrust fault by Trimble (1976) and later revised to a normal fault by Rodgers et al. (2006). The fault is estimated to have a dip of 15 to 20 degrees southwest, and it has a surface exposure on the west-facing slope of the canyon. The fault was estimated to be located 100 to 200 feet below ground surface (bgs) at the mouth of the canyon and approximately 180 feet wide, with formation offset downward to the west approximately 3.5 miles (Trimble 1976).

#### 1.2.4 Site Hydrogeology

The aquifer system beneath the FHML consists of loess, alluvium (alluvial sediments) (associated with the Fort Hall Canyon Creek), the alluvial fan extending to the north of the canyon, and the underlying Starlight Formation. The aquifer system is primarily unconfined beneath the FHML, but some areas have evidence of confined conditions, particularly on the east side of Fort Hall Canyon Creek near the landfill. The water table is situated within the Starlight Formation in some areas and in the alluvium or loess in other areas. The units in the aquifer system are hydraulically connected and chemicals are expected to migrate between them. Groundwater in the alluvium and the Starlight Formation discharges into the PVA near monitoring wells MW-103S/D (shallow/deep), MW-118D, and MW-116S, downgradient of the remediation system.

The alluvium consists of stream channel and alluvial fan deposits that are interbedded, discontinuous units of sand, gravel, silt, and clay. The Starlight Formation is described as “middle to late Tertiary basin-filling sediments and volcanoclastics” by Welhan et al. (1996). The Starlight

Formation is less transmissive than the alluvium, though in some instances, the top 10 feet of the Starlight Formation has been found to be similarly transmissive as the overlying alluvium.

Inflows to the aquifer system underlying the FHML area include direct recharge from precipitation, seepage from Fort Hall Canyon Creek, and seepage through portions of Cell 1. Outflows from the aquifer system underlying the FHML area include evapotranspiration and extraction via the pumping wells. Recent average precipitation recorded at the landfill weather stations were approximately 12 inches per year.

Groundwater flowing through the mouth of Fort Hall Canyon discharges to the Lower PVA. As noted above, the PVA comprises northern, eastern, and southern subaquifers and is the sole source for drinking water for the communities of Pocatello and Chubbuck. In the southern portion of the PVA, wells have high yields because they are completed in coarse, clean upper gravels at depths less than 100 to 150 feet bgs. The transmissivity of the upper gravels was estimated at approximately 10 square feet per second, with aquifer storage estimated at 0.005 (unitless), based on constant discharge pumping tests of municipal wells (CH2M Hill 1994).

The Lower PVA aquifer system is defined by the lateral boundaries of the geologic contact between the Quaternary alluvium with less permeable rock formations (i.e., Starlight Formation along the south–southwestern boundary near the FHML). The contact between the Upper Gravels and underlying Tertiary Starlight Formation is steep on the southwest side becoming more of an undulating surface in the center of the valley (CH2M Hill 1994).

Groundwater flows through the Lower PVA from southeast to northwest, with groundwater discharging to the Lower PVA from tributary basins, including Fort Hall Canyon. Horizontal flow gradients within the Lower PVA vary from zero (stagnation zone) to 0.003 feet per foot over the 9,330 feet between the confluence of Fort Hall Canyon and the Lower PVA and PA-3. These gradients are considerably smaller than what is regularly observed within Fort Hall Canyon. Vertical head gradients were measured to be negligible at MW-106, PA-4 and PA-9 well clusters within the Lower PVA (CDM Smith 2020b). An upward gradient was measured at upgradient well pair MW-116S/D in 2019, where groundwater discharge from Fort Hall Canyon is occurring.

### 1.2.5 Offsite Monitoring and Domestic Well Network

An extensive monitoring well network has been established throughout the FHML and offsite in the PVA to evaluate the impacts of the FHML to groundwater (**Figure 1-2**). The offsite groundwater well monitoring network consists of multiple well groups, as outlined below.

1. **Cell 1 and Offsite Bannock County Monitoring Wells.** These monitoring wells are located adjacent to and downgradient of Cell 1 and are monitored to assess the extent of contamination immediately north–northeast of the Cell 1 boundary. Most are within the FHML property, but there are several located offsite of the FHML property boundary on private property (**Figure 1-2**). Data results and analysis for these wells are presented in spring and fall semiannual monitoring reports and are not discussed here (e.g. CDM Smith 2024b).
2. **City Monitoring Wells.** Groundwater monitoring wells installed by the City have been monitored to evaluate groundwater quality and COC plume migration toward the

municipal supply wells (**Figure 1-2**). Except for MW-37 and MW-38, City monitoring wells are designated with a “PA.”

3. **City Municipal Supply Wells.** The City has 21 municipal supply wells. The City uses some of these wells to monitor the extent of the plume and the presence of COCs in the City’s drinking water supply. Municipal supply wells #33 and #14 are the closest to FHML, in which COC impacts have historically been observed and, thus, are included in the FHML offsite groundwater monitoring well network. Neither well is currently operated for municipal supply purposes.
4. **Domestic Wells.** Nearly 50 domestic or irrigation groundwater wells (designated with “RW”) in the PVA have been monitored at least once between 1991 and 2024 to assess the extent of the offsite groundwater plume and to monitor COC concentrations within and surrounding impacted residential domestic water wells. CDM Smith samples some of these domestic wells annually.

### 1.2.6 COC Fate and Transport

Natural biodegradation of chlorinated solvents is well established in peer-reviewed literature and shown to occur under both aerobic (with oxygen) and anaerobic (without oxygen) conditions. Under aerobic conditions, tetrachloroethene (PCE) is considered recalcitrant (i.e., it does not degrade biologically), and TCE degradation is very slow. This is part of the reason these chemicals persist and tend to form relatively large plumes in aerobic transmissive aquifers.

However, under anaerobic conditions, PCE and TCE can undergo biotic transformation via anaerobic reductive dechlorination, in which bacteria use PCE and TCE as alternate electron acceptors in the absence of oxygen. During anaerobic dechlorination, sequential transformation occurs from PCE to TCE to cis-1,2-dichloroethene (cis-1,2-DCE) (primary) or trans-1,2-dichloroethene to vinyl chloride (VC) to ethene and/or ethane and chloride. The most common dechlorination pathway is the conversion of TCE to Cis-1,2-Dichloroethene (cis-1,2-DCE) to VC to ethene and ethane.

In addition to the anaerobic pathway, other degradation mechanisms for the lower chlorinated ethenes and ethanes, such as cis-1,2-DCE and VC, include anaerobic oxidation (coupled to sulfate or iron reduction) and aerobic oxidation (i.e., used as a carbon and energy source for aerobic microorganisms), which generates carbon dioxide and water. These alternate degradation mechanisms are important when there is significant sulfate or iron available anaerobically or in redox transition zones, where anaerobic groundwater comes into contact with aerobic groundwater in the downgradient/distal plumes or periodic infiltration of aerobic precipitation during rain events. This can occur either down- or cross-gradient from the anaerobic source zone or below the anaerobic treatment zone if there is a vertical gradient resulting in vertical mixing with aerobic groundwater.

In addition to the chlorinated ethenes, reductive daughter products ethene and ethane can be oxidized (i.e., used as carbon and energy sources) by aerobic and/or anaerobic sulfate- or iron-reducing microorganisms. Under conditions in which reductive daughter products are being directly oxidized, a complete mass balance to cis-1,2-DCE, VC, ethene, and/or ethane is not observed.

Geochemical conditions dictate the potential for degradation of chlorinated ethenes. In general, anaerobic conditions facilitate reductive dechlorination of chlorinated ethenes, and aerobic conditions can facilitate (1) cometabolism of TCE in the presence of methane, and (2) both cometabolism and direct oxidation of the lower chlorinated ethenes cis-1,2-DCE and VC. In general, reductive dechlorination mechanisms result in a carbon isotope shift during degradation, allowing degradation via this mechanism to be documented using compound specific isotope analysis (CSIA), which has recently been performed at the Site (CDM Smith 2019a, 2020a). In contrast, oxidative processes, such as direct oxidation reactions, generally do not result in a carbon isotope shift and thus cannot be discerned using carbon CSIA data.

Geochemical results and interpretation are provided in recent groundwater monitoring reports (e.g., CDM Smith 2023a). Geochemical conditions within Fort Hall Canyon near the remediation system are generally (1) aerobic on the east side of Fort Hall Canyon and upgradient of the remediation system and (2) anaerobic on the west side of Fort Hall Canyon. Generally, aerobic conditions are interpreted based on concentrations of dissolved oxygen (DO) greater than 1 milligram per liter (mg/L), while anaerobic conditions are defined based on low concentrations of DO (less than 1 mg/L) with methane production observed. Additionally, oxidation-reduction potential (ORP) is generally positive under aerobic conditions and negative under anaerobic conditions. Within the PVA, geochemical conditions are aerobic (i.e., oxygen is present, ORP is positive).

Thus, in the FHML Cell 1 source area(s) on the west side of the Fort Hall Canyon area, attenuation of COCs by biodegradation is likely occurring primarily via anaerobic processes, while aerobic processes likely dominate biodegradation on the east side of Fort Hall Canyon and in the distal PVA plume (CDM Smith 2019a, 2020a). Anaerobic degradation of PCE and TCE is significant immediately downgradient of Cell 1 but was not observed in the CSIA data downgradient of MW-118D (CDM Smith 2019a), which indicates that decreasing concentrations in this area are likely due to processes that do not cause an isotopic shift, such as physical (i.e., dilution, dispersion) attenuation. Both VC and cis-1,2-DCE degrade within the aerobic and anaerobic plume areas, which is why they do not persist in the Lower PVA.

An injection pilot study was conducted in April 2023 to evaluate the feasibility and effectiveness of slurry injections to deliver reactive amendments and enhance permeability to the west side of the Fort Hall Canyon area. Additionally, a tracer study was conducted in May 2023 in the east side of Fort Hall Canyon to evaluate groundwater flow and distribution. Results and interpretation of these tests will be presented in a forthcoming pilot study evaluation report.

## 1.3 Report Organization

This report is organized into the following sections:

**1.0 Introduction:** This section describes the purpose and organization of the report and summarizes site background information, including the site location, geology, and hydrogeology, the nature and extent of contamination, and COC fate and transport.

**2.0 2024 Offsite Field Sampling Activities:** This section presents a summary of the 2024 offsite sampling activities, including private property owner correspondence, groundwater sampling

and analysis, decontamination and handling of investigation-derived waste, and any deviations from the QAPP (CDM Smith 2021a) or sampling plan (**Appendix A**).

**3.0 Groundwater Monitoring Results:** This section presents the results of the 2024 offsite sampling activities and presents a summary of the data quality and usability, water level elevations, and groundwater analytical results.

**4.0 Data Analysis:** This section presents the updated PCE and TCE plume extents and the statistical analysis of PCE and TCE trends in select wells.

**5.0 Screening-Level Risk Assessment:** This section presents an updated SLRA based on new information collected during the 2024 sampling event to evaluate human health risks due to groundwater and vapor intrusion and updated SLERA to evaluate ecological risks due to ingestion of groundwater by animals.

**6.0 Conclusions and Recommendations:** This section presents the conclusions of the data analysis and provides recommendations for 2025 offsite groundwater sampling activities at the Site in accordance with the approach described in the QAPP (CDM Smith 2021a).

**7.0 References:** This section presents references used to prepare this report.

The following appendices are also provided:

- **Appendix A** – 2024 Annual Offsite Sampling Plan
- **Appendix B** – Field Documentation
- **Appendix C** – Historical Groundwater Results
- **Appendix D** – Data Usability Assessment Report
- **Appendix E** – Analytical Laboratory Data Packages
- **Appendix F** – Time Series Plots

This page intentionally left blank.

## Section 2

# 2024 Offsite Field Sampling Activities

During the 2024 annual offsite sampling event (June 17 through 19), groundwater samples were collected from 13 domestic and former municipal supply wells near FHML. An additional event was conducted in July (July 23 through 25), during which groundwater samples were collected from four City of Pocatello monitoring wells. **Figure 2-1** and **Table 2-2** present wells that were sampled in summer 2024. Several offsite Bannock County monitoring wells were sampled in April 2023, results for which are presented under a separate cover (CDM Smith 2024b).

The 2024 offsite sampling activities were performed in accordance with the QAPP (CDM Smith 2021a) and the 2024 Offsite Sampling Plan (**Appendix A**), except as described in **Section 2.4**.

## 2.1 Private Property Access

Consent was requested and received from property owners or a property management company to access properties and collect samples from offsite groundwater monitoring wells and/or domestic water wells sampled.

### 2.1.1 City Monitoring Well Access

The offsite City monitoring wells are located on Latter-Day Saints (LDS) Church property used as a community ballpark and farm fields. Sampling consent was arranged between Bannock County and the LDS Church property management company. Unlike the domestic well private property consent forms, these consent forms allow access for a single sampling event only and are reinstated each year.

### 2.1.2 Domestic Well Access

Prior to the annual offsite sampling event, each property owner was contacted to schedule a sampling appointment. All properties sampled have property access agreements on file. If neither verbal nor written consent was obtained, the domestic well was not sampled.

### 2.1.3 Municipal Supply Well Access

CDM Smith coordinates tap sampling of Muni-Well-14 and Muni-Well-33 directly with the City of Pocatello Water Department prior to every sampling event. Authorized city employees meet CDM Smith at each well to open the well houses and run the pumps for sampling.

## 2.2 Groundwater Sampling

Offsite well construction details are presented in **Table 2-1**. Sampling information for the offsite wells sampled during this event are presented in **Table 2-2**.

**Appendix B** contains the field documentation for the 2024 annual offsite sampling event, including equipment calibration forms, well purge forms, sample chain-of-custody forms, and the field logbook.

### 2.2.1 Groundwater Elevation Measurements

Water levels were not collected for domestic or City wells during the 2024 offsite monitoring event. Domestic wells are not opened by sampling teams, and water is only accessible by a spigot at the well head, except for RW-2203H. Depth to groundwater is measured at each well where a pump or HydraSleeve was deployed for sampling; these measurements are listed on well purge forms (**Appendix B**).

Pressure transducer data were downloaded from six onsite Bannock County monitoring wells during the June event. Depth to groundwater is measured at each well during the data downloads; these measurements are listed on the transducer data download form (**Appendix B**). Transducer downloads will be conducted during the semiannual monitoring events in the future.

### 2.2.2 Sampling Procedures

Groundwater wells were sampled in accordance with the following standard operating procedures (SOPs) identified in the QAPP (CDM Smith 2021a):

- SOP 1-2 – Sample Custody
- SOP 1-12 – Low-Stress (Low-Flow) Groundwater Sampling
- SOP 2-1 – Packaging and Shipping Environmental Samples
- SOP 2-2 – Guide to Handling Investigation-Derived Waste
- SOP 4-1 – Field Logbook Content and Control
- SOP 4-2 – Photographic Documentation of Field Activities
- SOP 4-5 – Field Equipment Decontamination at Nonradioactive Sites
- SOP 6-1 – Tap Water Sampling of Residential and Extraction Wells

The following water quality parameters were collected at each location prior to collecting groundwater samples using a Yellow Springs Instruments (YSI) water quality meter or Hach turbidity meter:

- DO
- ORP
- pH
- Temperature
- Specific conductivity
- Turbidity

### 2.2.2.1 Tap Sampling

All domestic wells except for RW-2203H were sampled according to the procedures outlined in SOP 6-1, “Tap Water Sampling of Residential and Extraction Wells” as specified in the QAPP (CDM Smith 2021a). Most domestic wells sampled had a nearby frost-free spigot where groundwater could be collected. Some wells without spigots had alternate access points used per the owner’s request.

Groundwater was purged from domestic wells at the maximum flow rate prior to field parameter measurement. For wells with unknown well construction, 300 gallons were purged at the maximum flow rate. For wells with known well construction, the minimum purge volume was either 3 well volumes or 300 gallons, whichever was lower. Volumes purged from each well are presented in **Table 2-2**. Purge water was disposed according to the owner’s preferences, typically in the lawn or a nearby field and usually diverted with a garden hose.

After purging the minimum volume, water quality parameters were collected every 3 to 5 minutes until parameters stabilized. The water source was left continuously running during field parameter collection; however, the flow rate was decreased, if possible, to an appropriate rate for sample collection. Field parameters were measured with grab samples, which were sealed in the water quality meter sample cup without headspace to minimize the impact of oxygen in the ambient air. Field parameter grab samples were collected from the spigot with the hose removed, if possible. After field parameters stabilized, the groundwater sample was collected from the spigot directly, if possible, at a flow rate low enough to prevent aeration of groundwater and bubble entrapment in the sample vials. Purge forms for domestic wells are provided in **Appendix B**.

### 2.2.2.2 HydraSleeve Sampling

City of Pocatello monitoring wells and RW-2203H were sampled according to the HydraSleeve passive sampling procedure (CDM Smith 2024a, 2023d). HydraSleeves were used at select locations that were not equipped with a dedicated pump or spigot. This method was first introduced in fall 2023, where 11 monitoring wells were sampled using both HydraSleeves and low-flow passive sampling in a comparability study (CDM Smith 2024a). It was determined that HydraSleeve passive sampling was an acceptable substitute for low-flow sampling via bladder pumps.

### 2.2.3 Sample Analysis

Samples were analyzed according to the QAPP (CDM Smith 2021a). All groundwater well samples were analyzed for volatile organic compounds (VOCs) by U.S. Environmental Protection Agency (EPA) Method 8260D.

## 2.3 Decontamination and Investigation-Derived Waste

HydraSleeve and tap sampling does not use nondedicated sampling equipment that requires decontamination between sampling locations.

Remaining groundwater from the HydraSleeve that was not collected in sample bottles was containerized and properly disposed of onsite at the landfill. Personal protective equipment was disposed of onsite at the landfill.

## 2.4 Deviations

Except where noted below, sampling locations and procedures did not deviate from the 2024 annual offsite sampling plan (**Appendix A**) or QAPP (CDM Smith 2021a). Field documentation is provided in **Appendix B**.

### 2.4.1 City of Pocatello Monitoring Wells

The following deviations with respect to City monitoring wells occurred:

- Because of the limited available sample volume from the HydraSleeve, eight sample vials were collected from PA-3 instead of the nine vials typically collected for matrix spike/matrix spike duplicate (MS/MSD) samples. This is not expected to impact data quality.

### 2.4.2 Domestic Wells

The following deviations with respect to domestic monitoring wells occurred:

- RW-2076F was sampled at the end of the day because of access constraints during the day. The sample was collected before turbidity and specific conductance stabilized to finish sampling before dark. The rest of the purge parameters were stabilized. This is not expected to impact data quality.
- RW-2140H was not sampled because the property owner did not respond to attempts to schedule a sampling appointment. This location was sampled during the fall 2024 (September 2 through 10, 2024) sampling event and will be reported in a forthcoming report.
- RW-2151H has a cycling pump that causes intermittent discoloration of the water. This has been observed in prior sampling events (CDM Smith 2023c). To avoid excessive purge times and pump burnout, field parameters were measured, and samples were collected only during periods of clear water. Because of the cycling, turbidity did not stabilize prior to sampling. It is not certain how this may impact data quality.
- RW-2172H was sampled from the property owner's garden hose. Although this sampling location resulted in less aeration than prior events (CDM Smith 2023c), the flow rate was still higher than preferred for VOC sampling. To minimize aeration, the sample was collected at the edge of the flow stream. It is not certain how this may impact data quality.
- RW-2203H was sampled; however, the HydraSleeve was initially stuck, likely because of dragging or snagging on the infrastructure downhole from the old pump. This well and its pump are not in use by the property owner. The sample was orange/brown in color, likely from a combination of motion to get the sleeve out and the water quality in the well. The turbidity measurement was relatively high. These observations are consistent with former years' sampling via low-flow methods, likely because of the disintegration of old tooling (CDM Smith 2023c). It is not certain how this may impact data quality.

### 2.4.3 City of Pocatello Municipal Supply Wells

The municipal supply wells are not accessible with HydraSleeves or portable pumps. Because Muni-Well-14 flows at approximately 1,000 gpm, the city staff cannot operate it for long enough to wait for stabilization of purge parameters before the public expresses concerns. Therefore, the sample was collected after three readings were collected at 2-minute intervals, and some parameters did not stabilize prior to sampling.

Since 2023, the City has deployed a submersible pump in Muni-Well-33, and the normal supply pump is offline. The submersible pump did not allow for flow rate control or sampling via the spigot in the pump house. To minimize aeration, the sample was collected at the edge of the flow stream.

This page intentionally left blank.

## Section 3

# Groundwater Monitoring Results

This section presents the groundwater monitoring results of the 2024 annual offsite sampling event. All analytical results are presented in **Appendix C**.

### 3.1 Data Usability Assessment

Data validation was performed in accordance with the analytical methods and National Functional Guidelines for Organic Superfund Methods Data Review (EPA 2020). Holding times, sample preparation blanks (method, equipment, source, trip), duplicates (field), surrogate compound recovery, MS/MSDs, laboratory control sample/laboratory control sample duplicates (LCS/LCSDs), interferences, reporting limits (RLs), and compound identification and quantification were included in the review.

All data were received in final form, and validation was performed on the final data. CDM Smith validated laboratory analytical data with the EQUIS Data Quality Module for the VOC analyses. The validation narrative is provided in **Appendix D**, and the final laboratory data packages for each laboratory sample delivery group are included in **Appendix E**. **Table D-1** provides the samples and their corresponding sample delivery groups (SDGs). All data are suitable for their intended use. Some of the results should be used with caution as noted by the “J/ UJ” qualifiers applied during the data validation process.

#### 3.1.1 Precision

Precision was assessed by comparing the relative percent differences (RPDs) or absolute differences for laboratory duplicate samples, field duplicate samples, MS/MSD analyses, and LCS/LCSD analyses. Laboratory in-house limits were used for laboratory duplicate samples LCS/LCSD and MS/MSD duplicate analyses. An RPD field duplicate criteria of 30 percent (%) was used for field duplicates. For field duplicates where results were greater than five times the level of quantification, the RPD was calculated and compared with the 30% precision criteria. Where results were less than five times the RL, the absolute difference was calculated and compared with a precision criterion of less than or equal to the RL. **Table D-2 (Appendix D)** presents comparisons of results for primary samples and associated field duplicates. No analytes were detected in the parent samples or their field duplicates and no data required qualification for RPD criteria.

#### 3.1.2 Accuracy

Accuracy was assessed with percent recoveries in MS/MSD, LCS/LCSD, and surrogate recoveries. All percentage recoveries in LCS/LCSDs, MS/MSDs, and for surrogates met the control limit criteria except for high recoveries for two compounds, and there was a high RPD for one compound in an LCS/ LCSD set. These analytes were not detected in the associated samples and no data were qualified for the high recoveries or high RPD.

Samples RW-8284P-20240618, RW-8048P-20240618, RW-8030P-20240618, and RW-2076F-20240619 were analyzed from vials with headspace. All results for these four samples were qualified estimated (J/UJ).

### 3.1.3 Comparability

Comparability from one sampling event to another is achieved by structuring the field sampling program and protocol for sample collection and analyses. CDM Smith's technical SOPs are followed to ensure consistent sampling techniques. In addition, EPA-approved analytical methods and RLs are defined and used to ensure comparability of data.

All data included in this report have been validated and are considered acceptable for use; **Appendix D** provides the full validation narrative and results. Results qualified J/UJ should be used with caution.

### 3.1.4 Completeness

An analytical completeness goal of 90% for each analytical group was used to determine completeness. Analytical completeness was evaluated for each analytical group through comparison of the number of nonrejected data to the number of requested analyses. All analyses for field samples that were submitted to the laboratory were successfully analyzed, yielding a completeness result of 100%, which met the 90% goal.

### 3.1.5 Sensitivity

The RLs achieved for all samples were adequate to meet the data quality objectives.

## 3.2 Sampling Results

**Appendix C** presents all 2024 and available historical groundwater data for offsite wells. Time series plots in **Appendix F** present available data for chlorinated ethenes and geochemical parameters by well. Analytical results from the 2024 annual offsite sampling event are summarized in the following subsections.

### 3.2.1 VOCs

Detections of VOCs are presented in **Table 3-1** (municipal supply wells), **Table 3-2** (domestic wells), and **Table 3-3** (City of Pocatello monitoring wells). The results are screened against the EPA MCLs and Idaho Groundwater Rule (IDGW) Primary and Secondary Standards for drinking water. Results for PCE, TCE, cis-1,2-DCE, and VC are also shown on **Figures 3-1** through **3-3**.

#### 3.2.1.1 City Municipal Supply Wells

Consistent with 2023 results (CDM Smith 2023c), none of the City municipal supply well VOC results exceeded the EPA MCL or IDGW primary standard (**Table 3-1**). However, TCE was detected in both Muni-Well-14 and Muni-Well-33 at 0.93 J and 1.9 µg/L, respectively.

#### 3.2.1.2 Domestic Wells

TCE exceeded the MCL and IDGW primary standard in the following wells (**Table 3-2**):

- RW-2151H (21 µg/L)

- RW-2172H (18 µg/L)
- RW-2203H (21 µg/L)
- RW-2237H (11 µg/L)
- RW-7677P (5.9 µg/L)
- RW-8030P (6.1 J µg/L)

TCE was detected below standards in RW-8048P and RW-8284P.

PCE was detected in most wells below the MCL or IDGW standard, ranging from 0.41 to 3.4 µg/L. Detections that did not exceed these standards range from 2.8 to 2.9 µg/L. Reductive dechlorination daughter product, cis-1,2-DCE, was detected in six of the 12 domestic wells sampled (**Table 3-2**).

### 3.2.1.3 City of Pocatello Monitoring Wells

None of the City of Pocatello monitoring wells exceeded the EPA MCL or IDGW primary standard. However, TCE was detected in PA-1, PA-3, and PA-4 below 2 µg/L (**Table 3-3**).

## 3.2.2 Geochemical Parameters

Geochemical parameters are used to assess conditions in groundwater affected by the landfill leachate/waste, including redox conditions, pH, and alkalinity, and to evaluate conditions that facilitate COC degradation. Field parameters (conductivity, pH, temperature, turbidity, DO, and ORP) are presented in **Tables 3-1** (municipal supply wells), **Table 3-2** (domestic wells), and **Table 3-3** (City of Pocatello monitoring wells).

### 3.2.2.1 Specific Conductance

Specific conductance was measured at all sampled wells. Results are presented in **Tables 3-1, 3-2, and 3-3**. Relatively high specific conductance (greater than 1,000 microsiemens per centimeter [ $\mu\text{S}/\text{cm}$ ]) was observed at RW-2151H, RW-2172H, RW-2203H, and RW-2237H (**Table 3-2**). Specific conductance in all other sampled wells was less than 1,000  $\mu\text{S}/\text{cm}$ .

### 3.2.2.2 pH

pH was measured at all sampled wells. In municipal supply wells, domestic wells, and City of Pocatello monitoring wells, pH ranged from 7.0 to 7.96 standard units (**Tables 3-1, 3-2, and 3-3**). No pH levels outside of the IDGW Secondary drinking water standard (range 6.5 to 8.5 standard units) were observed.

### 3.2.2.3 Redox Conditions

DO, ORP, sulfate, ferrous iron, and methane are redox parameters used to evaluate reducing conditions at a location. Redox conditions often control the mobility and subsequent concentration in groundwater of redox-sensitive metals such as iron, manganese, and arsenic. Under reducing conditions, these metals are transformed from their oxidized (and immobile) states to their more soluble, reduced forms. In addition, many metals that are not redox sensitive are sorbed to iron and manganese oxyhydroxides, which may dissolve under reducing conditions,

releasing sorbed metals. If site soil/sediments contain redox-sensitive metals, elevated concentrations in groundwater will be observed in areas with reducing conditions.

In 2024, DO and ORP were measured at all sampled wells. Other geochemical parameters were not measured in the 2024 annual offsite sampling event. All City monitoring, municipal supply, and domestic supply wells exhibited aerobic conditions, as indicated by DO greater than 1 milligram per liter (mg/L) and positive ORP readings (**Tables 3-1, 3-2 and 3-3**).

## Section 4

### Data Analysis

As discussed in **Section 2.2**, an extensive monitoring well network is used to assess impacts of the FHML Cell 1 source to groundwater within the Fort Hall Canyon and PVA. **Appendix C** presents all available historical and current PCE and TCE data, and **Appendix F** provides chlorinated ethene time series plots for the wells sampled in June 2024. Statistical analyses of other wells sampled in previous events can be found in their respective sampling event reports (CDM Smith 2023c, 2024b).

The following sections present the updated PCE and TCE groundwater plume extent and statistical trend analysis-based incorporation of the latest data results.

#### 4.1 Plume Extent

Groundwater sampling results collected from the spring semiannual and offsite 2024 monitoring events were incorporated into the three-dimensional (3D) model to update the conceptual site model. The 3D model was developed with Leapfrog Works software and is used to update the interpolated lateral extents of PCE and TCE groundwater plumes. Approximately 120 groundwater sampling locations onsite and offsite contribute to the concentration contouring. Model settings are revised according to site conditions, and contours are further revised manually in reported data figures. For instance, there is not extensive bounding data in the distal portions of the plume (i.e., near northernmost City municipal supply wells #14 and #33); the original interpolations were revised to adjust for this. Further description of the model development is provided in the Final QAPP (CDM Smith 2021a).

**Figures 4-1** and **4-2** present the modeled 5 µg/L isoconcentration contours for PCE and TCE, respectively. As shown in **Figure 4-1**, PCE above 5 µg/L is present predominantly in the groundwater along the eastern boundary of Cell 1, throughout the remediation system area, and along the Fort Hall Canyon into the PVA, extending northwest from the base of the landfill. In 2024, the highest offsite concentrations of PCE did not exceed the MCL.

As shown in **Figure 4-2**, the TCE plume has a similar footprint to PCE, except that it extends farther to the northwest in the Lower PVA toward the City. The maximum TCE concentrations are observed at the base of Cell 1 in the vicinity of the remediation system. The distal edge of the 5 µg/L isoconcentration contour is currently estimated to be near RW-8030P. TCE was detected in two domestic wells and the City monitoring wells sampled downgradient of RW-8030P. Consistent with previous sampling events, the highest offsite concentrations of TCE exceeded the MCL and occurred near RW-2203H. The 2024 results suggest a longer plume than was contoured after the 2023 sampling.

As with the PCE plume, there are no bounding data available in the offsite area between the remediation system and RW-2151H because of lack of access to the private properties located there and because of the steeply sloped hillside north of Cell 1; therefore, the plume contour was estimated and manually adjusted in those areas.

## 4.2 Statistical Analysis of PCE and TCE

For wells with adequate PCE and TCE data, a statistical analysis was conducted in accordance with EPA and IDEQ guidance (EPA 2009; IDEQ 2014) to evaluate concentration trends. These data are used to assess the overall plume trends. **Figures 4-1** and **4-2** present the offsite monitoring well trend summary for PCE and TCE, respectively. The following sections describe the statistical approach and results for each well group.

### 4.2.1 Statistical Approach

PCE and TCE groundwater data results were analyzed for statistically significant concentration trends. Trends were statistically evaluated with Mann-Kendall and Theil-Sen tests to identify datasets with increasing, decreasing, stable trend, or no trend and their associated trendline slope.

Mann-Kendall analysis compares each data point to later data points in the same data set to develop a summation statistic, the  $S$ , based on all the individual data point comparisons (EPA 2009). The magnitude of  $S$  illustrates the variance of the data set, and the sign of  $S$  corresponds to the trend. The probability ( $p$ -value) is the test statistic used to determine whether the trend is statistically significant at the alpha level chosen. The confidence level associated with the trend result equals the value of the  $p$ -value subtracted from one, as a percentage. A statistically significant trend is considered to be present if the confidence level is greater than 95% for increasing and decreasing results, with a direction corresponding to the sign of  $S$ . Between 95 and 90% confidence, a trend is considered “probable”. No trend with a confidence level is considered statistically significant. The coefficient of variation is equal to the dataset standard deviation divided by its mean, and it is used to distinguish between data sets with no trend and a stable trend.

The statistical calculations are performed using the EnvStats R package (Millard 2013), which is consistent with EPA ProUCL v5.2 (EPA 2022), and Mann Kendall trend results are interpreted from the calculations according to the following approach, described in the Mann-Kendall Analysis Decision Matrix (Aziz et al. 2003) and used in the GSI Mann-Kendall Toolkit (Connor et al. 2012):

- Increasing ( $S$  greater than 0, Confidence Factor (CF) greater than 95%)
- Probably increasing ( $S$  greater than 0, CF between or equal to 95%, and 90%)
- No trend ( $S$  greater than 0, CF less than 90%)
- Stable (if  $S$  is less than or equal to zero and coefficient of variation less than 1)
- Probably decreasing ( $S$  less than 0, CF between or equal to 95%, and 90%)
- Decreasing ( $S$  less than 0, CF greater than 95%)

Data sets were only evaluated with these statistical tests if the following conditions were met:

- The data set contained at least 6 data points and no more than 40.

- The data set contained less than 50% nondetect (method detection limit) results.

The time frame of analysis varies based on available data. In most cases, all available data are used in the analysis, often beginning in the early 1900s. Select wells are also statistically evaluated for shorter timeframes because of the greater density in available data in more relevant timeframes.

#### 4.2.2 City Municipal Supply Wells

The City uses some municipal supply wells to monitor the extent of the plume and the presence of COCs in the City's drinking water supply. Municipal supply wells #33 and #14 are located closest to the FHML area where COC impacts have historically been observed.

The statistical summary for City municipal supply wells is presented in **Table 4-1**. Statistically significant trends were exhibited as follows:

- PCE: Decreasing in municipal well #33.
- TCE: Decreasing in municipal supply wells #33 and #14.

#### 4.2.3 City Monitoring Wells

City monitoring wells were installed by the City for groundwater sampling (PA wells) or for groundwater extraction (MW-38 and MW-37). These wells are located in the Lower PVA downgradient of the FHML, beyond the Fort Hall Canyon. PA-1, PA-3, PA-4, and PA-8 are currently sampled annually. For wells with multiple screened intervals (i.e., PA-4 and PA-8), data were separated by sample depth, where known, for the time series plots and statistical analysis. Only the middle screen interval was sampled for PA-4 and PA-8.

The statistical summary for City monitoring wells is presented in **Table 4-2**. Statistically significant trends were exhibited as follows:

- PCE: Decreasing in PA-3 and PA-4 (middle interval).
- TCE: Decreasing in all sampled City wells—PA-1, PA-3, PA-4 (middle interval), and PA-8 (middle interval).

#### 4.2.4 Domestic Wells

Domestic wells are potable supply and irrigation wells located on private properties located downgradient to the FHML. Over the last few decades, some of these domestic wells have been sampled regularly.

The statistical summary for domestic wells is presented in **Table 4-3**. Statistically significant trends for all available data were exhibited as follows:

- Both PCE and TCE exhibited decreasing trends in RW-2076F, RW-2151H, RW-2172H, and RW-2203H. TCE also exhibited decreasing trends in RW-7677P.

- Both PCE and TCE exhibited no statistical trend with stable concentrations in RW-2237H and RW-8284P. PCE also exhibited no statistical trend with stable concentrations in RW-7677P.
- TCE exhibited an increasing trend in RW-8030P.
- All other evaluated data sets did not exhibit a statistically significant trend.

Truncated data sets (2017–2024) were evaluated for RW-2076F and RW-8030P. The following trends were observed:

- PCE exhibited no statistical trend with stable concentrations in RW-2076F and a probably decreasing trend in RW-8030P.
- TCE did not exhibit a statistically significant trend in RW-2076F and exhibited a stable trend in RW-8030P.

## Section 5

# Screening-Level Risk Assessment

This section presents a SLRA based upon the analytical results obtained from offsite wells (monitoring and domestic) from February 2024 to June 2024. Wells sampled in June 2024 are presented in **Table 2-2**. Wells sampled earlier in 2024 are discussed under a separate cover (CDM Smith 2024b).

The SLRA includes the following receptors and exposure pathways:

- Human health risks due to use of groundwater as the sole source of household water.
- Human health risks due to potential vapor intrusion into residences located above contaminated groundwater.
- Human health risks due to use of groundwater as a source of domestic water for irrigation.
- Ecological risks due to ingestion of groundwater that may be used to provide drinking water for animals.

This SLRA is consistent with those conducted in 2019 through 2023 as reported in (CDM Smith 2020a, 2020c, 2021b, 2022, 2023c). The results of the 2019 through 2023 SLRA have been retained in several tables in this report for ease of comparison with the outcomes of the SLRA based upon the 2024 analytical results.

**Sections 5.2 through 5.6** present the screening-level human health risk evaluation. **Section 5.7** presents the screening-level ecological risk evaluation. The purpose of the screening-level evaluations is to frame the analytical results for the samples collected during the 2024 offsite groundwater sampling event. If a baseline human health risk assessment (BHHRA) were to be conducted as more data are available for the Site, potential complete and significant pathways that could require quantitative evaluation may include, but are not limited to:

- Direct ingestion, vapor inhalation (i.e., shower steam), and dermal exposure to impacted groundwater by offsite residents and workers using a domestic well for their sole source of household water (i.e., they are not connected water services from the City Water Department).
- Direct ingestion, vapor inhalation (i.e., fine water mist created by sprayers), and dermal exposure to impacted groundwater by residents using a domestic well for irrigation water.
- Ingestion of crops watered by domestic wells used for irrigation.
- Direct contact exposure to crops and other plants that have been watered by domestic wells used for irrigation.

- Vapor intrusion into residences located above impacted groundwater, with subsequent inhalation of vapors by residents.

A quantitative BHHRA must consider seasonal variations in groundwater COC concentrations and incorporate a sufficient number of samples to support statistical analysis. For an individual well, a minimum of 8 to 10 samples would be needed. Collection of time series data for established COCs improves the confidence that variability around mean concentration values have been accurately estimated. Following collection of a sufficiently large data set, the data must be evaluated to assure a minimum level of data quality, compare data to background conditions, and confirm COCs. Based on the validated data, toxicity and exposure assessments will need to be performed to enable risk characterization.

Because sufficient time series data and data for all potentially contaminated media have not yet been collected, a BHHRA is beyond the scope of this report. Instead, a preliminary SLRA is presented, based on comparison of groundwater data collected in 2024 with EPA regional screening levels (RSLs) for tap water and vapor intrusion screening levels (VISLs) estimated from groundwater concentrations using the EPA VISL calculator.

Exceedances of RSLs indicate properties that may be at risk as a result of exposure to impacted groundwater that is the sole source of household water at these residences. Similarly, groundwater samples collected from City of Pocatello monitoring wells and offsite monitoring wells have been compared to RSLs. The potential health risks associated with impacted groundwater used for irrigation cannot be assessed at the screening level for human health exposure but has been included for ecological receptors (see **Section 5.7.2**). Screening-level risks have been generated for indoor air that may be subject to vapor intrusion at residences located above contaminated groundwater. Screening-level risks are discussed further in **Sections 5.3** and **5.4**.

The SLERA presented in **Section 5.8** is focused on the evaluation of the use of groundwater as a water source for ecological receptors. The SLERA does not evaluate all potentially complete exposure pathways because of lack of data for some media types and lack of data that are representative of the range of environmental conditions.

## 5.1 Current and Potential Future Uses of Groundwater

**Figure 5-1** presents the current Domestic Water Source Inventory Area (DWSIA) and Bannock County parcel boundaries for properties in the Lower PVA. Most parcels are zoned as residential or commercial properties, except for a few at the southern boundary that are zoned agricultural. The FHML operates under a nonconforming use provision.

The Lower PVA is the sole source of drinking water for the Pocatello and Chubbuck communities, as well as surrounding unincorporated Bannock County land area. Domestic wells also supply water for agricultural purposes (gardening/crop irrigation). **Figure 5-1** presents a parcel map for the DWSIA, with color-coding based on whether a City water supply connection is available or active at each parcel. There are 340 parcels within the DWSIA, 52 of which have one or more wells installed on the property. Forty-four parcels contain one or more domestic or irrigation

wells, and 28 of these 44 parcels are not connected to the municipal water supply. Most parcels with a domestic supply well are currently connected to City water or have a connection available.

**Figure 5-2** presents the property parcel map for domestic wells in the vicinity of the current COC plume and denotes wells that exceeded the MCL in spring or summer 2024. All of the parcels with domestic or irrigation wells that are fully or partially within the current modeled extent of the TCE groundwater plume are connected to City water.

## 5.2 HHRA Approach

The methods used to conduct this SLRA include:

- Data evaluation/hazard identification
- Toxicity assessment
- Exposure assessment
- Risk characterization
- Uncertainty analysis

This approach is consistent with EPA's *Risk Assessment Guidance for Superfund (RAGS)* (EPA 1989), although it has been abbreviated for this screening-level evaluation.

### 5.2.1 HHRA Data Evaluation/Hazard Identification

Identification of chemicals of potential concern (COPCs) for this SLRA is based on: (1) detection of VOCs at concentrations above the laboratory's RL; and (2) detection of metals above the Federal Primary Drinking Water MCLs. The data set used for this evaluation consists of the samples collected in 2024 from the offsite Bannock County and City monitoring wells and residential/domestic wells (21 locations total, with MW-103S sampled in both February and May 2024). Seven VOCs (TCE, PCE, cis-1,2-DCE, bromodichloromethane, bromoform, chlorodibromomethane, and chloroform)<sup>1</sup> were detected in groundwater within the DWSIA (**Table 5-1**).

TCE was detected in 16 wells at concentrations ranging from 0.30 to 21 µg/L with measured concentrations from seven wells exceeding the groundwater standard. PCE was detected in eight wells at concentrations ranging from 0.40 to 3.4 µg/L; no wells had measured concentrations exceeding the groundwater standard. TCE was the only VOC with exceedances of the groundwater standards (EPA MCL or IDGW primary standards) based on comparison of the MCL with the maximum observed concentration;<sup>2</sup> therefore, this analyte was retained as a COPC for further assessment.<sup>3</sup>

---

<sup>1</sup> The trihalomethanes (bromodichloromethane, bromoform, chlorodibromomethane, and chloroform) are common chlorinated disinfection byproducts.

<sup>2</sup> The detection limit for 1,2-dibromo-3-chloropropane and 1,2-dibromoethane was greater than the MCL.

<sup>3</sup> Chemicals not detected in any sample collected were not retained as COPCs for further risk quantification.

## 5.2.2 Toxicity Assessment

### 5.2.2.1 Overview

The objective of a toxicity assessment is to identify the types of adverse health effects that are caused by a particular chemical, and how the appearance of these adverse effects depends on exposure level. In addition, the toxic effects of a chemical frequently depend on the route of exposure (oral, inhalation, dermal) and the duration of exposure. The toxicity assessment process is usually divided into two parts: the first characterizes and quantifies the noncancer effects of the chemical, while the second addresses the cancer effects of the chemical. This two-part approach is employed because there are typically major differences in the time course of action and the shape of the dose-response curve for cancer and noncancer effects.

### 5.2.2.2 Noncancer Effects

All chemicals can cause adverse health effects at a sufficient dose. However, when the dose is sufficiently low, typically no adverse effect is observed. Thus, in characterizing the noncancer effects of a chemical, the key parameter is the threshold dose at which an adverse effect first becomes evident. Doses below the threshold are considered to be safe, while doses above the threshold are likely to cause an effect.

The threshold dose is typically estimated from toxicological data (derived from studies of humans and/or animals) by finding the highest dose that does not produce an observable adverse effect, and the lowest dose that does produce an effect. These are referred to as the no-observed-adverse-effect level (NOAEL) and the lowest-observed-adverse-effect level (LOAEL), respectively. The threshold is presumed to lie in the interval between the NOAEL and the LOAEL. However, to be conservative (protective), noncancer risk evaluations are not based directly on the threshold exposure level but on a value referred to as the reference dose (RfD) for oral exposures (e.g., incidental ingestion of soil, ingestion of drinking water, ingestion of dietary items), with units of mg per kg body weight per day, or the reference concentration (RfC), with units of milligrams per cubic meter for inhalation exposures. The RfD and RfC are estimates (with uncertainty spanning perhaps an order of magnitude) of a daily exposure to the human population (including sensitive subgroups) that is likely to be without an appreciable risk of deleterious effects during a lifetime.

The RfD and RfC values are derived from the NOAEL, LOAEL, or benchmark dose by dividing by an uncertainty factor (UF) that reflects the limitations of the data used. If the data are from studies in humans, and if the observations are considered to be very reliable, the UF may be as small as 1.0. However, the UF is normally at least 10, and can be much higher if the data are limited. UFs are assigned to account for uncertainty arising from extrapolation of animal data to humans, the use of a LOAEL instead of a NOAEL, the use of less than chronic exposure, and other limitations in the available data (e.g., lack of reproductive data).

The effect of dividing the NOAEL or the LOAEL by a UF is to ensure that the RfD or RfC is not higher than the threshold level for adverse effects. Thus, there is always a “margin of safety” built into a RfD and RfC, and levels equal to or less than the RfD or RfC are nearly certain to be without any risk of adverse effect. Levels higher than the RfD or RfC may carry some risk, but because of the margin of safety, a level above the RfD or RfC does not mean that an effect will necessarily occur. The protectiveness of this margin of safety will vary from chemical to chemical, depending

upon the quality of the data and the size of any applied UF. A chemical for which large UF has been applied will generally have a higher margin of safety than a chemical with a smaller UF.

### 5.2.2.3 Cancer Effects

For cancer effects, the toxicity assessment process has two components. The first is a qualitative evaluation of the weight of evidence (WOE) that the chemical does or does not cause cancer in humans. Previously, this evaluation was performed by EPA using the system summarized in **Exhibit 5-1**:

**Exhibit 5-1 Toxicity Assessment – Cancer Effect**

WOE Group	Meaning	Description
A	Known human carcinogen	Sufficient evidence of cancer in humans.
B1	Probable human carcinogen	Suggestive evidence of cancer incidence in humans.
B2	Probable human carcinogen	Sufficient evidence of cancer in animals, but lack of data or insufficient data in humans.
C	Possible human carcinogen	Suggestive evidence of carcinogenicity in animals.
D	Cannot be evaluated	No evidence or inadequate evidence of cancer in animals or humans.
E	Not carcinogenic to humans	Strong evidence that it does not cause cancer in humans.

EPA has developed a revised classification system for characterizing the WOE for carcinogens (EPA 2005). However, this system has not yet been implemented for a number of chemicals, so the older classification scheme is retained for use in this assessment.

For chemicals that are classified in Group A, B1, B2, or C using EPA guidelines (EPA 1986), the second part of the toxicity assessment is to describe the carcinogenic potency of the chemical. This is done by quantifying how the number of cancers observed in exposed animals or humans increases as the dose increases. Typically, it is assumed that the dose-response curve for cancer has no threshold, arising from the origin and increasing linearly until high doses are reached. Thus, the most convenient descriptor of cancer potency is the slope of the dose-response curve at low doses (where the slope is still linear). This is referred to as the slope factor (SF), which has dimensions of risk of cancer per unit dose.

Estimating the cancer SF is often complicated by the fact that observable increases in cancer incidence usually occur only at relatively high doses, frequently in the part of the dose-response curve that is no longer linear. Thus, it is necessary to use mathematical models to extrapolate from the observed high dose data to the desired (but unmeasurable) slope at low dose. To account for the uncertainty in this extrapolation process, EPA typically chooses to use the 95% upper confidence limit of the slope as the SF. This means there is a 95% probability that the true cancer potency is lower than the value chosen for the SF. This approach ensures that there is a margin of safety in cancer risk estimates.

For inhalation exposures, cancer risk is characterized by an inhalation unit risk (IUR) value. This value represents the upper-bound excess lifetime cancer risk estimated to result from continuous lifetime exposure to a chemical at a concentration of 1 microgram per cubic meter in air.

### 5.2.3 Toxicity Values

Toxicity values (RfD, RfC, SF, and IUR values) established by EPA are listed in the Integrated Risk Information System (IRIS) (EPA 2024a). Other toxicity values are available as interim recommendations from EPA's Superfund Technical Assistance Center operated by the National Center for Environmental Assessment (NCEA). A toxicity value hierarchy was developed by EPA for use in site-specific risk assessments (EPA 2003). This hierarchy provides an order of preference of toxicity values, with Tier 1 being the preferred source of toxicity information, if available, then Tier 2, followed by Tier 3. The recommended hierarchy of toxicity values is:

- Tier 1 – EPA's IRIS: IRIS assessments have undergone external peer review in accordance with EPA peer review guidance at the time of the assessment. IRIS health assessments contain EPA consensus toxicity values.
- Tier 2 – EPA's Provisional Peer Reviewed Toxicity Values (PPRTVs): The Office of Research and Development/NCEA/Superfund Health Risk Technical Support Center develops PPRTVs on a chemical-specific basis when requested by EPA's Superfund program.
- Tier 3 – Other Toxicity Values: Tier 3 includes additional EPA and non-EPA sources of toxicity information, such as the California Environmental Protection Agency and Agency for Toxic Substances and Disease Registry. Priority should be given to sources of information that are the most current, are transparent and publicly available, and which have been peer-reviewed.

The EPA RSL tables include a summary of toxicity values derived from these sources using the tiered system described above. These tables are maintained by EPA and periodically updated (EPA 2024b). All toxicity values used in this assessment were taken from the most recent version of the RSL tables (May 2024).

### 5.2.4 Exposure Assessment

The exposure assessment describes how residents in the DWSIA could come in contact with chemicals in groundwater. The assessment addresses exposures that could result under existing conditions and from reasonably anticipated potential land uses in the future. The exposure assessment contributes to the SLRA by describing the following:

- Populations that might be exposed.
- Exposure pathways by which individuals could become exposed.
- Magnitude, frequency, and duration of potential exposures.

#### 5.2.4.1 Site Conceptual Exposure Model

A human health site conceptual exposure model (SCEM) has been prepared for the FHML. The SCEM consists of the following components:

- Primary contamination source (FHML)
- Contamination release mechanisms (e.g., leaching from former Cell 1)

- Potential secondary contamination sources (e.g., contaminated soil)
- Contaminant transport mechanisms (e.g., infiltration to groundwater, groundwater to soil vapor partitioning, vapor intrusion, and accumulation in residential living spaces)
- Contaminated exposure media (e.g., groundwater, soil, soil gas, indoor air)
- Exposure routes (e.g., ingestion, direct dermal contact, and inhalation of COCs during domestic water use; inhalation of COCs from indoor air; ingestion of COCs from contaminated produce)
- Potentially exposed receptors (e.g., residents)

**Figure 5-3** presents the SCEM. The SCEM illustrates how the exposure pathways create the potential for human health risk. The exposure pathways define how the contaminant source, impacted media, transport mechanisms, and exposure routes are linked together to make contaminants available for exposure by human receptors. In **Figure 5-3**, each potential exposure pathway is evaluated to determine if it is complete and whether it likely to be an important contributor to total exposures and risks. Boxes lacking a symbol under the “Human Health Receptors” heading in **Figure 5-3** indicate that the exposure pathway from source to receptor is incomplete. Boxes with closed circles indicate that the exposure pathway is potentially complete and may be an important contributor to total exposures. Boxes with an “X” indicate that the exposure pathway is potentially complete but deemed to be minor relative to the other pathways being evaluated.

Complete groundwater exposure pathways include the following:

- Ingestion – Potential use of groundwater for potable use presents risks of human health exposure to the contaminants through ingestion of drinking water and use in cooking.
- Inhalation – Potential use of groundwater for domestic purposes presents risks of human health exposure to VOCs through inhalation during activities such as bathing.
- Dermal absorption – Potential use of groundwater for domestic purposes presents risks of human health exposure to VOCs through skin contact during activities such as bathing.

Vapor intrusion is also a potential exposure pathway. Vapors from groundwater may enter a residence through preferential pathways (e.g., cracks in the foundation).

Additional exposures that may need to be considered in a BHHRA, but are not considered for quantitative evaluation in the SLRA include:

- Ingestion, inhalation, and dermal exposure to well water during irrigation activities is considered minor compared to exposures resulting from indoor use of water. The contribution of these pathways to total exposures could be evaluated in a BHHRA.
- Ingestion of fruits and vegetables irrigated with well water is considered a minor exposure pathway and has been evaluated qualitatively. Quantitative evaluation could be completed as part of a BHHRA.

- Dermal exposure, inhalation, and incidental ingestion of soils during digging or excavation activities are assumed to be minor because of the depth to groundwater.

#### 5.2.4.2 Exposure Assessment

For every exposure pathway of potential concern, it is expected that there will be differences between different individuals in the level of exposure at a specific location because of differences in intake rates, body weights, exposure frequencies, and exposure durations. Thus, there is normally a wide range of average daily intakes between different members of an exposed population. Because of this, all daily intake calculations must specify what part of the range of doses is being estimated. Typically, attention is focused on intakes that are “average” or are otherwise near the central portion of the range, and on intakes that are near the upper end of the range (e.g., the 95th percentile). These two exposure estimates are referred to as Central Tendency Exposure and Reasonable Maximum Exposure (RME), respectively.

Generic screening levels are based on default exposure parameters and factors that represent RME conditions for long-term/chronic exposures. The RME scenario includes, but is not limited to, the assumptions listed in **Table 5-2** for adult and child residents (EPA 2014a). This combination of conservative assumptions provides some assurance that the estimated risks presented under the RME scenario represent the high end of plausible exposure.

Based on the assumption of random exposure over an exposure area, risk from a chemical within an exposure area is related to the arithmetic mean concentration of that chemical averaged over the entire exposure area. For the SLRA, the exposure point concentration is represented by the 2024 sampling results.

### 5.3 Risk Characterization for Groundwater

The risk characterization was focused on noncancer hazards because noncancer hazards are the more sensitive endpoint compared to cancer risks for TCE. The potential for noncancer effects from a COPC was evaluated by comparing the results for sampling in 2024 for each well to the residential RSL for tap water. This ratio of site-related exposure to the noncancer risk level is called the hazard quotient (HQ). This total HQ, across chemicals, is referred to as the hazard index (HI). If the HI value is less than or equal to 1, noncancer hazards are not expected from any chemical, alone or in combination with others. If the screening level HI exceeds 1, it may be appropriate to perform a follow-on evaluation in which HQ values are added only across chemicals that affect the same target tissue or organ system (e.g., the liver). This is because chemicals that do not cause toxicity in the same tissues are not likely to cause additive effects. Because the COPCs evaluated in this SLRA do not act on the same target organs, HI values were not calculated. The HQ values represent the total exposure across the ingestion, inhalation, and dermal contact exposure pathways from the use of tap water. Note, these values do not consider potential vapor intrusion risk; potential VI risk is evaluated using VISL.

**Table 5-3** presents the HQ values for groundwater exposures based on the 2019 through 2024 data set, with results from 2019 through 2023 retained for comparative purposes. In 2024, 7 of the 21 wells have TCE HQ values that exceed the threshold of 1. Wells with HQ values greater than 1 are shaded gray. All the wells noted had an HQ exceedance of 1 in prior years. In 2024, HQ values ranged from 2 to 8 based on TCE exposures, with HQ values following a decreasing trend

over time for most wells. Two wells (RW-2151H and RW-2203H) show a higher TCE HQ in 2024 compared to 2023. No wells in 2024 had PCE HQ values that exceed the threshold of 1.

## 5.4 Risk Characterization for Indoor Air

The EPA VISL calculator was used to calculate potential indoor air concentrations due to VI and the associated carcinogenic risk and noncancer health hazards based on groundwater concentrations for volatile COPCs. The subsurface target concentrations in the VISL calculator are based on the generic conceptual model for VI described in EPA's VI guidance (EPA 2015). This conceptual model assumes a groundwater or vadose zone source of volatile vapors that diffuse upward through unsaturated soils towards the surface and into buildings. In this model, the soil in the vadose zone is considered to be relatively homogeneous and isotropic, though horizontal layers of soil types can be accommodated. The receptors are assumed to be occupants in buildings with poured concrete foundations (e.g., basement or slab on grade foundations or crawlspaces with a liner or other vapor barrier).

As described in EPA's VI guidance, VI is a potential human exposure pathway for a specific building or collection of buildings when the following conditions are met:

- A subsurface source of vapor-forming chemicals is present (e.g., in the soil or in groundwater) underneath or near the building(s).
- Vapors form and have a route along which to migrate (be transported) toward the building(s).
- The building(s) is(are) susceptible to soil gas entry, which means openings exist for the vapors to enter the building and driving "forces" exist to draw the vapors from the subsurface through the openings into the building(s).
- One or more vapor-forming chemicals composing the subsurface vapor source(s) is(are) also present in the indoor environment.
- The building(s) is(are) occupied by one or more individuals when the vapor-forming chemical(s) is(are) present indoors.

If one (or more) of these conditions is currently absent and is reasonably expected to be absent in the future (e.g., vapor migration is significantly and persistently impeded by natural geologic, hydrologic, or biochemical [e.g., biodegradation] processes and conditions), the vapor intrusion pathway is referred to as "incomplete" (EPA 2015).

The underlying assumption for this generic model is that site-specific subsurface characteristics will reduce or attenuate vapor concentrations as vapors migrate upward from the source and that site-specific building characteristics will tend to further dilute the vapors as they mix with the air in the building (EPA 2014b). Depth to groundwater and the soil profile of the vadose zone are expected to reduce the upward migration of volatile organic vapors to potential receptors.

Therefore, calculated indoor air concentrations and associated risks are likely to be conservative. **Table 5-4** summarizes the predicted indoor air concentrations and associated risks calculated

using EPA's VISL calculator. Calculations are based on the concentrations of TCE in groundwater samples from wells in 2024, a revised generic attenuation factor (0.0005), and an average groundwater temperature of 13.5 degrees Celsius. A lower attenuation factor was selected from the default because of the thickness of the vadose zone (approximately 80–90 feet from the water table to ground surface) and geologic logs that indicated significant intervals of low permeability silts and clays. The generic conceptual model for VI assumes a groundwater or vadose zone source of volatile vapors that diffuse upward through unsaturated soils toward the surface and into buildings (EPA 2014b). Not all of these properties have residential structures currently on them, but zoning allows for residential building in the future.

Because the PCE risk from groundwater exposure was determined to be negligible (no HQ values above 0.1), vapor intrusion risk calculations were first performed using the maximum groundwater concentration of 3.4 µg/L to determine if a well-by-well analysis was needed. The maximum VI PCE HQ from this evaluation was 0.016; therefore, a well-by-well evaluation was not performed. PCE risks because of VI were confirmed to be below a level of concern.

As seen in **Table 5-4**, in 2024, no wells had a VI HQ value greater than 1.

## 5.5 Risk Characterization for Fruits and Vegetables

Ingestion of fruits and vegetables that have been irrigated with impacted domestic well water may increase the risk of exposure to COCs. Risks were not quantitatively evaluated for the use of groundwater as an irrigation source for crops because VOCs are volatile and will dissipate and mix with the ambient air when applied to soil. When watering crops, especially through spray irrigation, the amount of VOCs in the water will be significantly lowered as it moves into the air. Therefore, only a small amount of VOCs is expected to be available to garden plants. Any VOCs that are remaining in the water can be taken up by plants; however, the plants will move the VOCs through their leaves into the air. Therefore, it is not anticipated that significant uptake of these chemicals would occur at levels that would be unsafe to those consuming vegetables grown with groundwater.

## 5.6 Total Human Health Risk

The total risk for a potential receptor was calculated by adding the groundwater HQ value with the VI HQ value to account for all exposure pathways evaluated in this SLRA. **Table 5-5** presents the total HQ values for TCE in 2024;<sup>4</sup> values are displayed to one significant digit. As seen, 7 of the 21 wells assessed in 2024 have HQ values that exceed the threshold of 1, with HQ values ranging from 2 to 9 for TCE, driven primarily by groundwater exposure (ingestion and inhalation while using groundwater). None of these wells are being used for domestic purposes at this time. Risk conclusions are, therefore, considered hypothetical, should groundwater be used from these wells for domestic purposes in the future.

---

<sup>4</sup> PCE HQs for groundwater and VI were well below the level of concern for the maximum concentration detected in groundwater (3.4 µg/L). Therefore, PCE HQs are not presented in **Table 5-5**.

## 5.7 Uncertainty Analysis

Quantitative evaluation of the risks to humans from environmental contamination is frequently limited by uncertainty regarding a number of key data items, including concentration levels in the environment, the true level of human contact with contaminated media, and the true dose-response curves for noncancer and cancer effects in humans. This uncertainty is usually addressed by making assumptions or estimates for uncertain parameters based on whatever limited data are available. Because of these assumptions and estimates, the results of risk calculations are uncertain, and it is important for risk managers and the public to keep this in mind when interpreting the results of a risk assessment.

Based on this preliminary SLRA, it appears TCE would be retained as a primary COPC in groundwater for a BHHRA because of groundwater ingestion if this pathway is complete for a location. However, groundwater is used as a drinking water source for a limited number of locations (**Section 5.1**), and all properties with groundwater TCE HQs greater than 1 are connected to City water supply, excluding the property containing MW-103S, which is not connected to City water but has the availability for a City connection. Similarly, based on historical groundwater concentrations, HQ values for TCE and possibly PCE were slightly greater than 1 with HQ values of 2 based on VI exposure. However, more recent sampling conducted in 2021, 2022, 2023, and 2024 indicates all VI HQs are less than or equal to 1. The following sections describe the uncertainties associated with the estimated HQ values.

### 5.7.1 Exposure Assessment

Use of site-specific exposure assumptions and factors could result in reduced risks for constituents or their elimination from the list of COPCs. Potential risk associated with exposure to VOCs through VI was calculated using generic conceptual model assumptions and default exposure parameters, with the noted exceptions detailed in **Section 5.4**. EPA cautions that the calculated VISLs may be inappropriate where:

- Contaminant sources originate in landfills, where methane is generated in sufficient quantities to induce advective transport in the vadose zone.
- Vapor-forming chemicals can be released within an enclosed space and the density of the chemicals' vapor may result in significant advective transport of the vapors downward through cracks and openings in floors and into the vadose zone.
- Leaking vapors originate from pressurized gas transmission lines.

In addition, residential building construction and the presence of preferred vapor migration pathways can greatly affect the vapor intrusion process and resulting indoor air quality and must be thoroughly understood. The depth to groundwater and vadose soil characteristics may greatly reduce the actual risks and health hazards associated with VI.

### 5.7.2 Risk Characterization

It is important to note that no bright-line rule is established at an HQ of 1, and risk management decisions are made on a site-by-site basis. An HQ of 1 or less indicates that the receptor's exposure is equal to or less than an "allowable" exposure level, and adverse health effects are

considered unlikely to occur. When the cumulative HQ is less than or equal to 1, a conclusion of “no significant risk of harm to human health” based on noncancer effects is appropriate. Chronic intakes that are greater than the RfC (i.e., an HQ greater than 1) indicate a possibility for adverse effects, at least in sensitive populations, and therefore may require further evaluation. However, whether such exposure actually produces adverse effects will (depending on the chemical) be a function of many factors, such as the accuracy of uncertainty factors applied to the NOAEL, the appropriateness of animal data used in models and extrapolated to humans, and the potential for the chemical to cause effects in organs or systems (e.g., reproductive and immune systems) that have not been adequately studied. It is generally accepted that the protective assumptions made by EPA in deriving RfCs will, in most cases, mean that exposures slightly in excess of the RfC will be associated with a low risk for adverse effects, with the probability of adverse effects increasing with increasing exposure. For TCE, uncertainty factors for studies included in the derivation of the RfC ranged from 10 to 1,000.

### 5.7.3 Pathways Not Evaluated Quantitatively

Contact with contaminated soil and ingestion of fruits and vegetables that have been irrigated with impacted domestic well water may increase the risk of exposure to COCs. This pathway was not evaluated in the SLRA because of lack of measured plant tissue data to adequately evaluate this pathway. Literature-based uptake equations may be identified as part of a BHHRA to quantitatively evaluate this exposure pathway. Lastly, it is expected that VOCs will volatilize and not be taken up into produce tissue, making this a potentially minor exposure pathway.

### 5.7.4 Conclusions

Risk assessment guidance (EPA 1989) stresses the importance of considering uncertainties in interpreting and applying the results of any risk assessment. Because of the uncertainties, this risk assessment should not be construed as presenting absolute risks or hazards. Rather, it is a health protective analysis intended to indicate the potential for adverse impacts to occur. Assumptions are made based on EPA’s risk assessment guidance and relevant scientific literature. This risk assessment focuses on RME risks, which is the reasonable maximum exposure expected to occur. RME risks are used to determine whether unacceptable risks are present and to support risk management decisions. The overall risk to public health using RME is an upper-bound probability of adverse health effects; impacts are likely to be lower. It is also important to note that VI HQ estimates are based on conservative exposure assumptions (vapor intrusion modeling assumptions, depth to groundwater, thickness of the vadose zone, etc.).

One method for refining the exposure estimates would be to sample soil gas at a limited number of properties to refine exposure estimates and address potential uncertainties introduced by estimating indoor air levels from groundwater. If it is determined that completion of a BHHRA is necessary, collection and inclusion of soil gas data would aid in addressing these uncertainties and refine the estimation of risk for individual properties in the DWSIA.

## 5.8 Ecological Risk Evaluation

For the SLERA, risks were evaluated for ecological species that may be adversely impacted because of groundwater being used as a drinking water source and application of groundwater to plants. Risks were evaluated for terrestrial receptors only; aquatic and semiaquatic receptors

were not evaluated because the habitat is not intentionally supportive of these receptors and exposure pathways for groundwater are not complete. **Figure 5-3** presents the complete exposure pathways for ecological receptors. The sections below present the ecological risk evaluation for complete exposure pathways.

### 5.8.1 Terrestrial Plant Exposures and Risks

Potential risks due to the use of groundwater as an irrigation source for crops were not evaluated because VOCs will dissipate and mix with the ambient air when applied to soil, and toxicity data are lacking to perform a quantitative evaluation. When watering crops, especially through spray irrigation, the amount of VOCs in the water will be significantly lowered as it moves into the air. Therefore, very little VOCs are expected to be available to garden plants. Any VOCs that are remaining in the water can be taken up by plants; however, the plants will move the VOCs through their leaves into the air. This volatilization is the partitioning of contaminants into the air spaces within a plant and subsequent diffusion into the ambient air, under the assumption that ambient air is less contaminated. For VOCs, volatilization from the plant, or phytovolatilization, can represent a major loss mechanism (Limmer and Burken 2016). Therefore, it is not anticipated that significant uptake of these chemicals would occur at levels that would be unsafe to those consuming vegetables grown with groundwater used for irrigation.

### 5.8.2 Terrestrial Bird/Mammal Exposures and Risks

Because agricultural-specific screening values are not available for the types of receptors that may be present, wildlife receptor-specific screening values have been used as surrogates as provided in Los Alamos National Laboratory (LANL) ECORISK Database (Release 4.3, 2022). The LANL ECORISK Database provides screening levels that are protective of birds and mammals in various functional feeding guilds (carnivores, herbivores, insectivores) for a variety of chemicals, including metals and VOCs. The screening levels are media- and receptor-specific values that may be used to screen environmental data. The LANL screening-level derivation process is similar to the procedures used to develop EPA's Ecological Soil Screening Levels (EcoSSL). The LANL ECORISK Database provides detailed documentation for the type of data collected and used to derive the screening levels, including the selected NOAEL and LOAEL toxicity reference values, dietary uptake factors, transfer factors, and exposure parameters. For chemicals where an EcoSSL has been derived, the NOAEL-based soil ecological screening levels are set equal to the EcoSSL values.

**Table 5-6** presents a COPC selection for ecological receptors, considering data collected in 2024. The screening values selected for use in the COPC selection are based on the minimum NOAEL value available across all receptor groups provided in the LANL's ECORISK Database. As seen, comparison of the maximum concentration to the screening value for each chemical resulted in no COPCs being identified for ecological receptors. This is consistent with all the results from 2019 through 2023. Based on these findings, the use of groundwater as a drinking water source is unlikely to pose a risk to agricultural receptors when considering the magnitude of the difference between the most conservative screening values and the maximum concentration.

This page intentionally left blank.

## Section 6

# Conclusions and Recommendations

## 6.1 Results of Offsite and Domestic Well Monitoring

The following conclusions are based on the 2024 offsite monitoring event sampling results (**Tables 3-1 through 3-3**), statistical analysis (**Tables 4-1 through 4-3**), and COC time series plots (**Appendix F**):

- **City Municipal Supply Wells:** None of the samples collected from the municipal supply wells exceeded groundwater criteria. TCE was detected in both sampled wells. Statistically evaluated PCE and TCE data sets exhibited decreasing concentration trends.
- **City Monitoring Wells:** None of the samples collected from the City monitoring wells exceeded groundwater criteria. TCE was detected in PA-1, PA-3, and PA-4. PCE was not detected in any of the City wells sampled. Statistically evaluated PCE and TCE data sets exhibited decreasing concentration trends.
- **Domestic Supply Wells:** TCE exceeded the EPA MCL and IDGW primary standard in RW-2151H, RW-2172H, RW-2203H, RW-2237H, RW-7677P, and RW-8030P, and it was detected below standards in other domestic wells. PCE did not exceed the MCL or IDGW primary standard in any domestic well. The reductive daughter product cis-1,2-DCE was detected at low concentrations in several of the wells. Statistically evaluated PCE and TCE data sets exhibited either a decreasing or no significant trend.
- **Bannock County Monitoring Wells:** As reported under a separate cover (CDM Smith 2024b), PCE and TCE exceedances above the MCL persist in Cell 1 monitoring wells to the west, east, and downgradient of the remediation system.

Collectively, the offsite trend data suggest that the extent of the COC plume and many areas within the plume have decreased in concentration since contamination was first discovered in 1992; thus, the plume appears to be retracting. This is likely the result of reduced COC discharge to the Lower PVA because of the FHML Cell 1 remediation system operation. Areas with decreasing trends are likely more directly downgradient of areas of the plume where containment has been more effective. However, areas where no trend is observed indicate that complete containment of the COC plume from FHML has not been achieved and that COC discharge continues to impact the Lower PVA.

## 6.2 Screening-Level Risk Assessment

A screening-level evaluation of human and ecological risks was conducted using data collected in 2024. Human exposures, cancer risks, and noncancer health hazards associated with groundwater used as domestic tap water as well as VI were evaluated. Risk interpretation was focused on noncancer endpoints, as these are more sensitive than cancer endpoints. Ecological

risk was evaluated through agricultural receptors and application of groundwater to plants for groundwater that may be used for drinking water.

For human exposure, residents were evaluated as potential receptors. For groundwater exposure pathways, HQ values exceeded the threshold of 1 for 7 of 21 wells evaluated, with HQ values ranging from 2 to 8 for TCE. For VI, all TCE HQ values were less than or equal to 1.

The total risk for a potential receptor was calculated by summing the groundwater HQ value with the VI HQ value to account for all exposure pathways evaluated in this SLRA. **Table 5-5** presents the total HQ values for TCE. Seven of the 21 wells have HQ values that exceed the threshold of 1, with HQ values ranging from 2 to 9 for TCE. However, none of these wells are being used for domestic purposes currently. Risk conclusions are, therefore, considered hypothetical, should groundwater be used from these wells for domestic purposes in the future.

To evaluate ecological risk, screening values were selected for COPCs based on the minimum NOAEL value available across all receptor groups provided in the ECORISK Database. Comparison of the maximum concentration to the screening value for each chemical resulted in no COPCs being identified for ecological receptors. Based on these findings, the use of groundwater as a drinking water source is unlikely to pose a risk to agricultural receptors when considering the magnitude of the difference between the most conservative screening values and the maximum concentration.

## 6.3 Recommendations for 2025 City and Domestic Well Monitoring

The results of the 2024 offsite groundwater monitoring activities were used to develop recommendations for additional activities to continue to evaluate the impacts of the VOC plume migrating from the FHML to the PVA and assess risk to human health and the environment.

### 6.3.1 Groundwater Sampling and Analysis

Conduct a 2025 offsite groundwater monitoring event as detailed in **Table 6-1**, to include the sampling and analysis of field parameters and VOCs for the following (at a minimum):

- Domestic supply wells located within the TCE plume extent as defined on **Figure 4-2**.
- Any domestic well with a TCE exceedance of the standard within the last five years.
- A subset of the domestic wells along the boundaries of the VOC plume in which VOCs have either not been detected previously or have been rarely detected to confirm the plume has not expanded.
- Any additional domestic wells identified within the potential area of impact that have not been sampled previously to establish lateral and vertical offsite plume extent and assess any potential risk to human health or the environment.
- Select City monitoring wells to bound the plume in the PVA.

### 6.3.2 Evaluate Risk

- Assess the risks to human health and the environment based on past, present, and future groundwater COPC concentrations, refining the calculated risks based upon site-specific factors.
- Three properties were identified to have VI-based HQs for TCE equal to 1 in 2024 (**Table 5-4**): RW-2151H, RW-2172H, and RW-2203H. Therefore, the following is recommended:
  - Continue to collect groundwater samples from these locations.
  - If groundwater concentrations in future sampling efforts are elevated relative to the groundwater concentrations used in this risk evaluation, soil gas sampling could be beneficial in evaluating indoor air risks as soil gas data would allow for evaluation of a stronger line of evidence to determine potential VI risk.
- Determine if a BHHRA is necessary, based on results of future groundwater monitoring, and develop a timeline for incorporating all pertinent data collected after completion of additional groundwater monitoring if it is determined to be required.
- Continue to verify that domestic wells in use for drinking water continue to remain below EPA MCL and IDGW primary drinking water standards.

This page intentionally left blank.

## Section 7

### References

AEEC. 2018. *2017 Offsite Groundwater Monitoring Report, Fort Hall Mine Landfill, Bannock County, Idaho*. April.

Aziz, J., L. Meng, H. Rifai, C. Newell, and J. Gonzales. 2003. "MAROS: A Decision Support System for Optimizing Monitoring Plans," *Ground Water* 41, no. 3 (May–June): 355–67.  
[<https://doi.org/10.1111/j.1745-6584.2003.tb02605.x>]

Brown and Caldwell. 1994. *Phase II Hydrogeologic Assessment Draft Report, Bannock County, Idaho*. June.

Brown and Caldwell. 1992. *Preliminary Hydrogeologic Assessment in the Vicinity of Fort Hall Canyon Landfill, Bannock County, Idaho*. December.

CDM Smith. 2024a. *Draft 2023 Fall Semiannual Cell 1, 2 and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. Helena, Montana. Report prepared for Bannock County Public Works.

CDM Smith. 2024b. *Draft 2024 Spring Semiannual Cell 1, 2 and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. Helena, Montana. Report prepared for Bannock County Public Works.

CDM Smith. 2023a. *Final 2022 Fall Semiannual Cell 1, 2 and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. Helena, Montana. Report prepared for Bannock County Public Works.

CDM Smith 2023b. *Draft 2023 Spring Semiannual Cell 1, 2 and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. Helena, Montana. Report prepared for Bannock County Public Works.

CDM Smith 2023c. *Draft 2023 Offsite Groundwater Monitoring Report*. Helena, Montana. Report prepared for Bannock County Public Works.

CDM Smith 2023d. *Passive Sampling Approach at Fort Hall Mine Landfill, Bannock County, Idaho*. Helena, Montana. Report prepared for Idaho Department of Environmental Quality.

CDM Smith 2022. *Final Fall Semiannual Cell 1, 2, and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report, Fort Hall Mine Landfill, Bannock County, Idaho*. February.

CDM Smith. 2021a. *Final Groundwater Monitoring Program Plan Quality Assurance Project Plan Revision 1*, Fort Hall Mine Landfill, Bannock County, Idaho. Helena, Montana. Prepared for Bannock County Public Works.

CDM Smith 2021b. *Final Spring 2021 Semiannual Cell 1, 2 and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. December.

CDM Smith. 2020a. *Final 2019 Offsite Groundwater Monitoring Report, Fort Hall Mine Landfill, Bannock County, Idaho*. May.

CDM Smith. 2020b. *Final Spring 2020 Semi-annual Cell 1, 2 and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. November.

CDM Smith. 2020c. *Final 2020 Offsite Groundwater Monitoring Report, Fort Hall Mine Landfill, Bannock County, Idaho*. November.

CDM Smith. 2019a. *Final Fort Hall Mine Landfill 2018 Cell 1, 2, and 4 Groundwater Monitoring and Remediation System Operation and Maintenance Report*. June.

CH2M Hill. 1994. *Hydrogeology and Assessment of TCE Contamination in the Southern Portion of the Pocatello Aquifer – Phase I Aquifer Management Plan Final Report, City of Pocatello Water Department, Pocatello, Idaho*. December.

Connor, J., S. Farhat, and M. Vanderford. 2012. *Software User's Manual GSI Mann-Kendall Toolkit for Constituent Trend Analysis*. Version 1. [https://www.gsienv.com/gsi-technical-guidance/?resource\\_search=mann%20kendall](https://www.gsienv.com/gsi-technical-guidance/?resource_search=mann%20kendall)

EPA. 2024a. "IRIS." Available at <https://www.epa.gov/iris>.

EPA. 2024b. "Regional Screening Levels (RSLs)." May 2024 version. Available at <https://www.epa.gov/risk/regional-screening-levels-rsls>.

EPA. 2022. *ProUCL: Statistical Software for Environmental Applications for Data Sets with and without Nondetect Observations*. Version 5.2. <https://www.epa.gov/land-research/proucl-software>.

EPA. 2020. *National Functional Guidelines for Organic Superfund Methods Data Review*. EPA-540-R-2017-002.

EPA. 2015. *OSWER Technical Guide for Assessing and Mitigating the Vapor Intrusion Pathway from Subsurface Vapor Sources to Indoor Air*. OSWER Publication 9200.2-154. June.

EPA. 2014a. *Human Health Evaluation Manual, Supplemental Guidance: Update of Standard Default Exposure Factors*. OSWER Directive 9200.0-120. February 6.

EPA 2014b. *Vapor Intrusion Screening Level (VISL) Calculator User's Guide*. Office of Solid Waste and Emergency Response, Office of Superfund Remediation and Technology Innovation. Washington D.C. 20460. May 2014.

EPA. 2009. *Statistical Analysis of Groundwater Monitoring Data at RCRA Facilities, Unified Guidance*. EPA 530/R-09-007. March.

EPA. 2005. *Guidelines for Carcinogenic Risk Assessment*. Office of Research and Development. EPA/630/P-03/001F.


- EPA. 2003. *Human Health Toxicity Values in Superfund Risk Assessments*. OSWER. Directive 9285.7-53.
- EPA. 1989. *Risk Assessment Guidance for Superfund (RAGS)*. Volume I. Human Health Evaluation Manual (Part A). Office of Emergency and Remedial Response. EPA/540/1-89/002.
- EPA. 1986. *Guidelines for Carcinogen Risk Assessment*. Office of Research and Development. EPA/630/R-00/004.
- IDEQ. 2016. *Consent Order in the Matter of Contamination of Groundwater Near the Fort Hall Municipal Solid Waste Landfill*. November 2016.
- IDEQ. 2014. *Statistical Guidance for Determining Background Ground Water Quality and Degradation*. March.
- LANL. 2022. ECORISK Database (Release 4.3). Los Alamos National Laboratory, Los Alamos, New Mexico.
- Limmer, Matt and Joel Burken. 2016. *Phytovolatilization of Organic Contaminants*. *Environ. Sci. Technol.* 2016, 50, 6632–6643.
- Meehan, C.W. 2005. *Geochemistry of the Southern Pocatello Aquifer and its Implications for Aquifer Recharge and Contamination Potential*. Master of Science Thesis, Idaho State University.
- Millard, S.P. 2013. *EnvStats: An R Package for Environmental Statistics*. Springer, New York. ISBN 978-1-4614-8455-4, <https://www.springer.com>.
- Rodgers, D.W., S.P. Long, N. McQuarrie, W.D. Burgel, and C.F. Hersley. 2006. *Geologic Map of the Inkom Quadrangle, Bannock County, Idaho*. Idaho State University.
- Trimble, D.E. 1976. *Geology of the Michaud and Pocatello Quadrangles, Bannock and Power Counties, Idaho*. United States Geological Survey, 024-001-02811-5.
- Welhan, J., C. Meehan, and T. Reid. 1996. *The Lower Portneuf River Valley Aquifer: A Geologic/Hydrologic Model and its Implications for Wellhead Protection Strategies, EPA Wellhead Protection Demonstration Project and City of Pocatello Aquifer Geologic Characterization Project*. July.

This page intentionally left blank.


# Figures


---



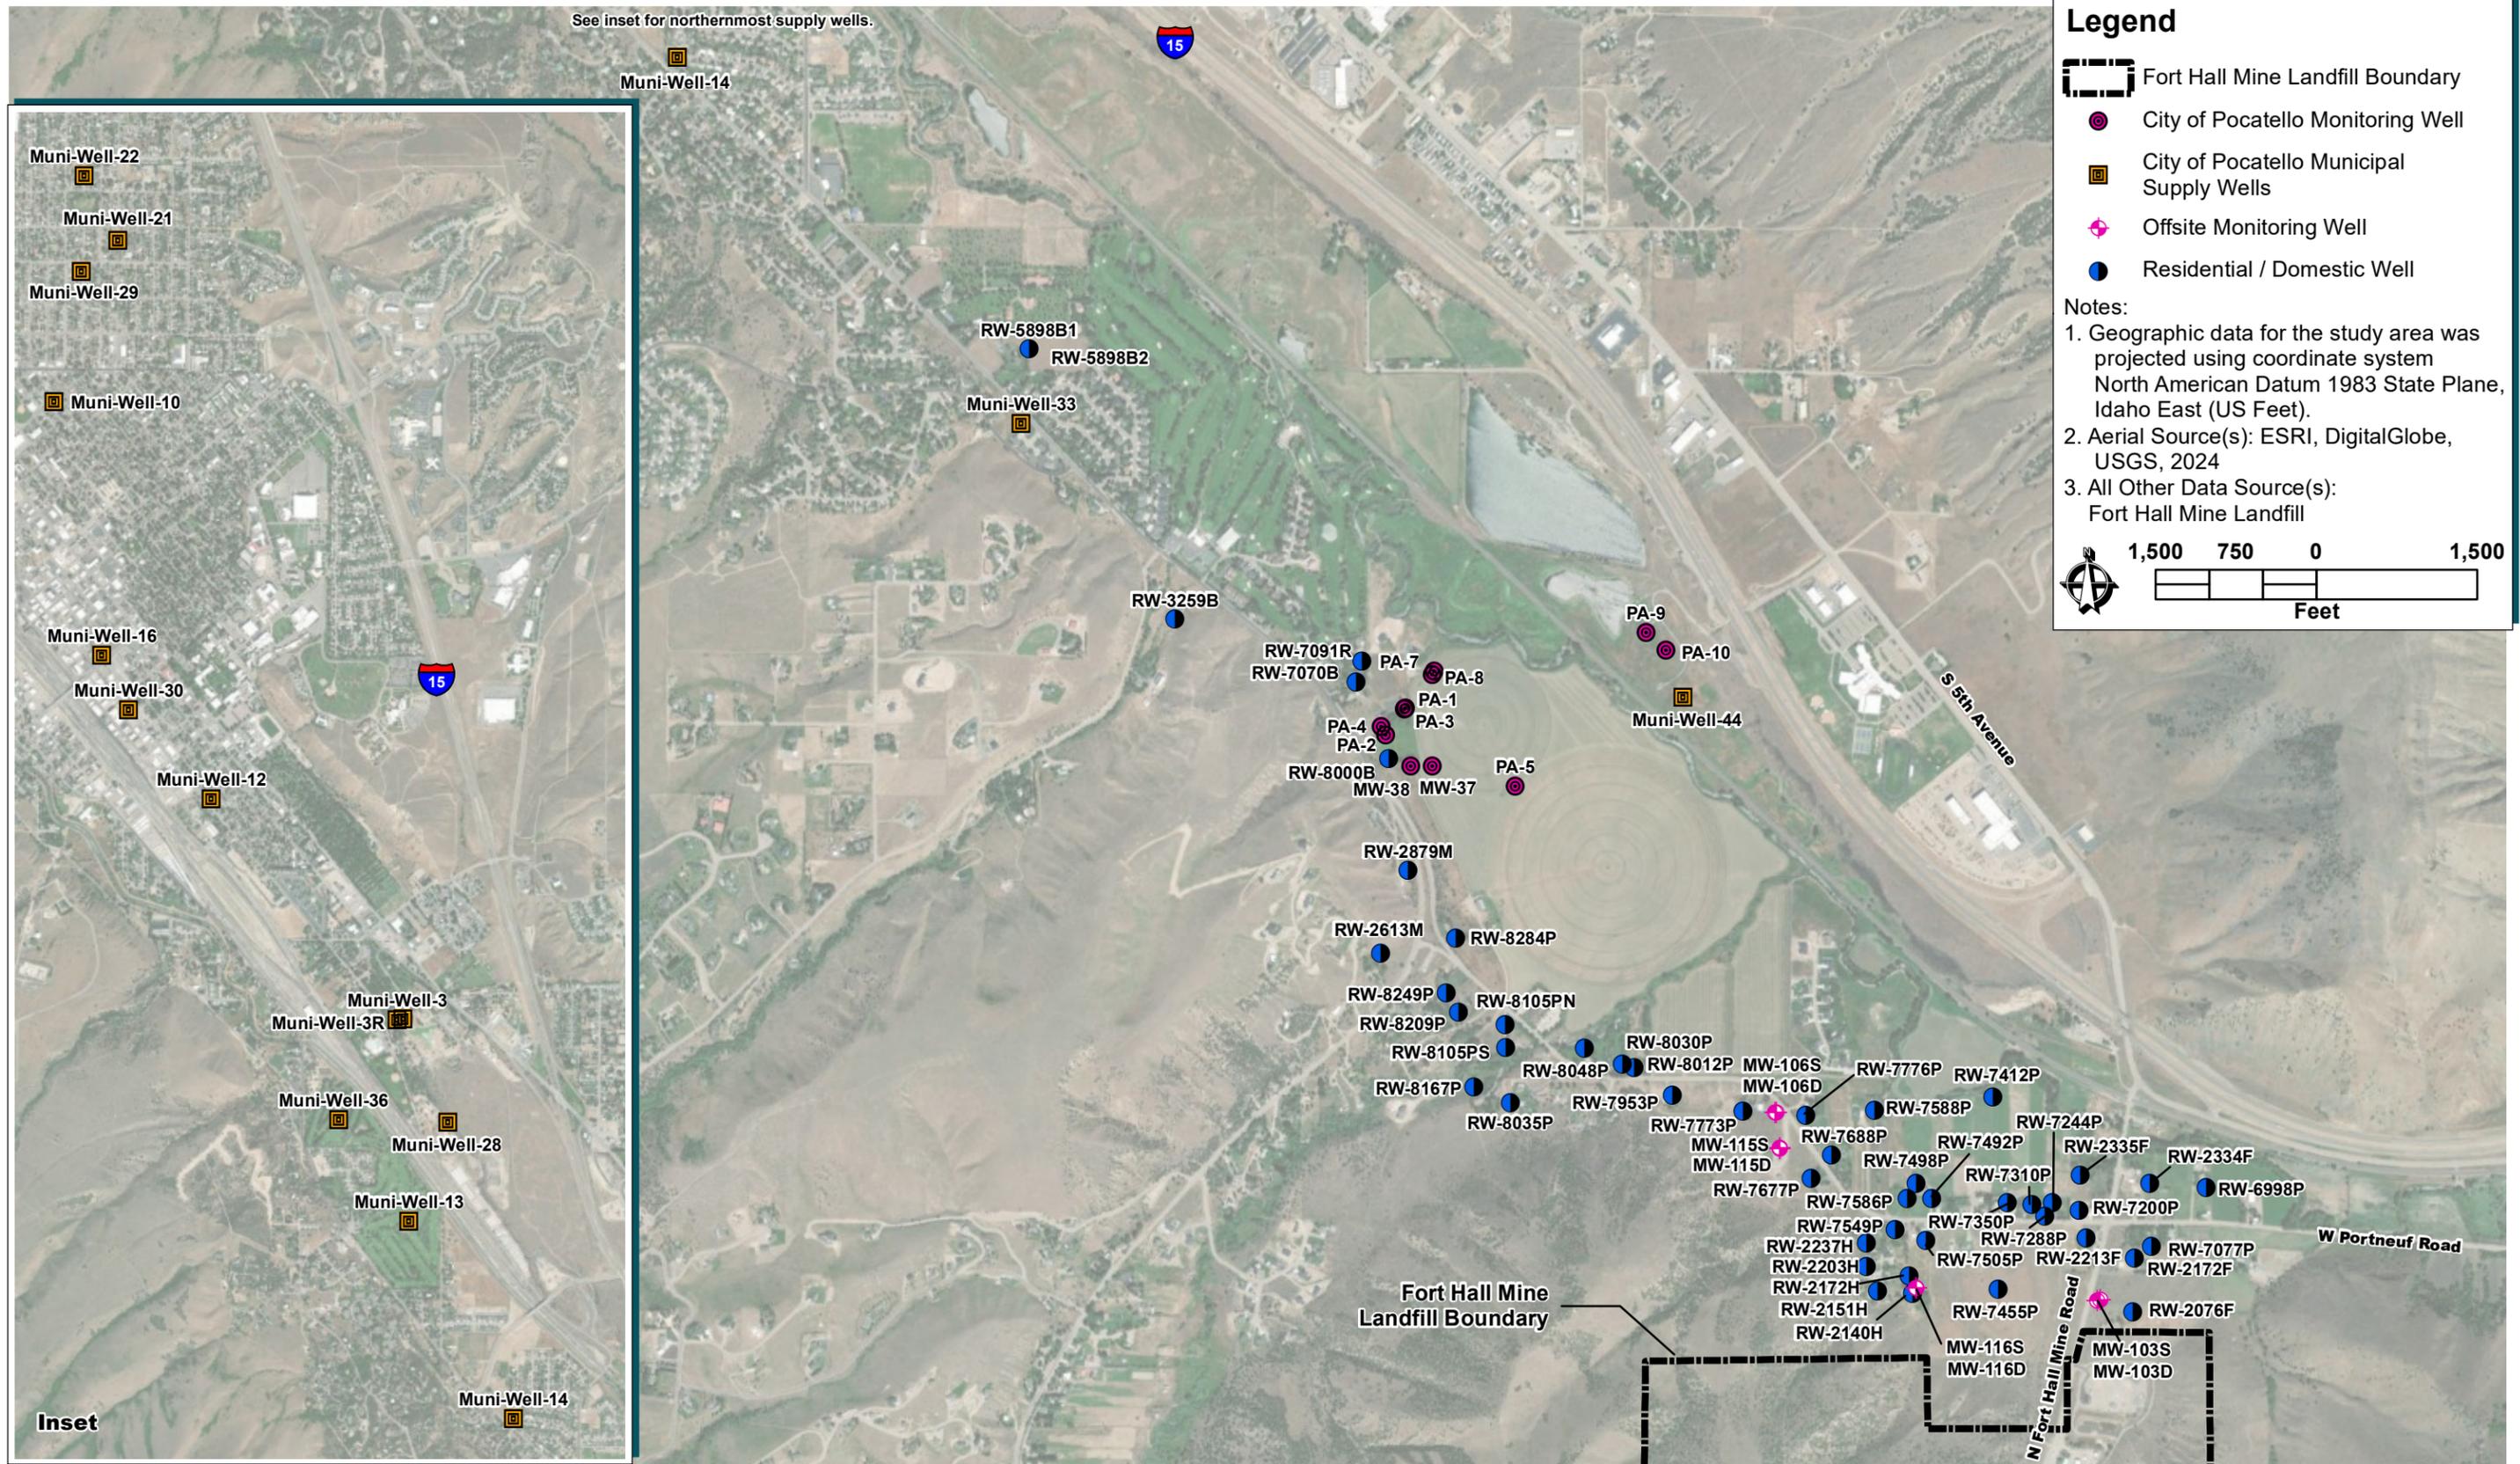


Draft By: K. Scheller Date: 9/11/2024 | Check By: H. Rolston Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/19/24

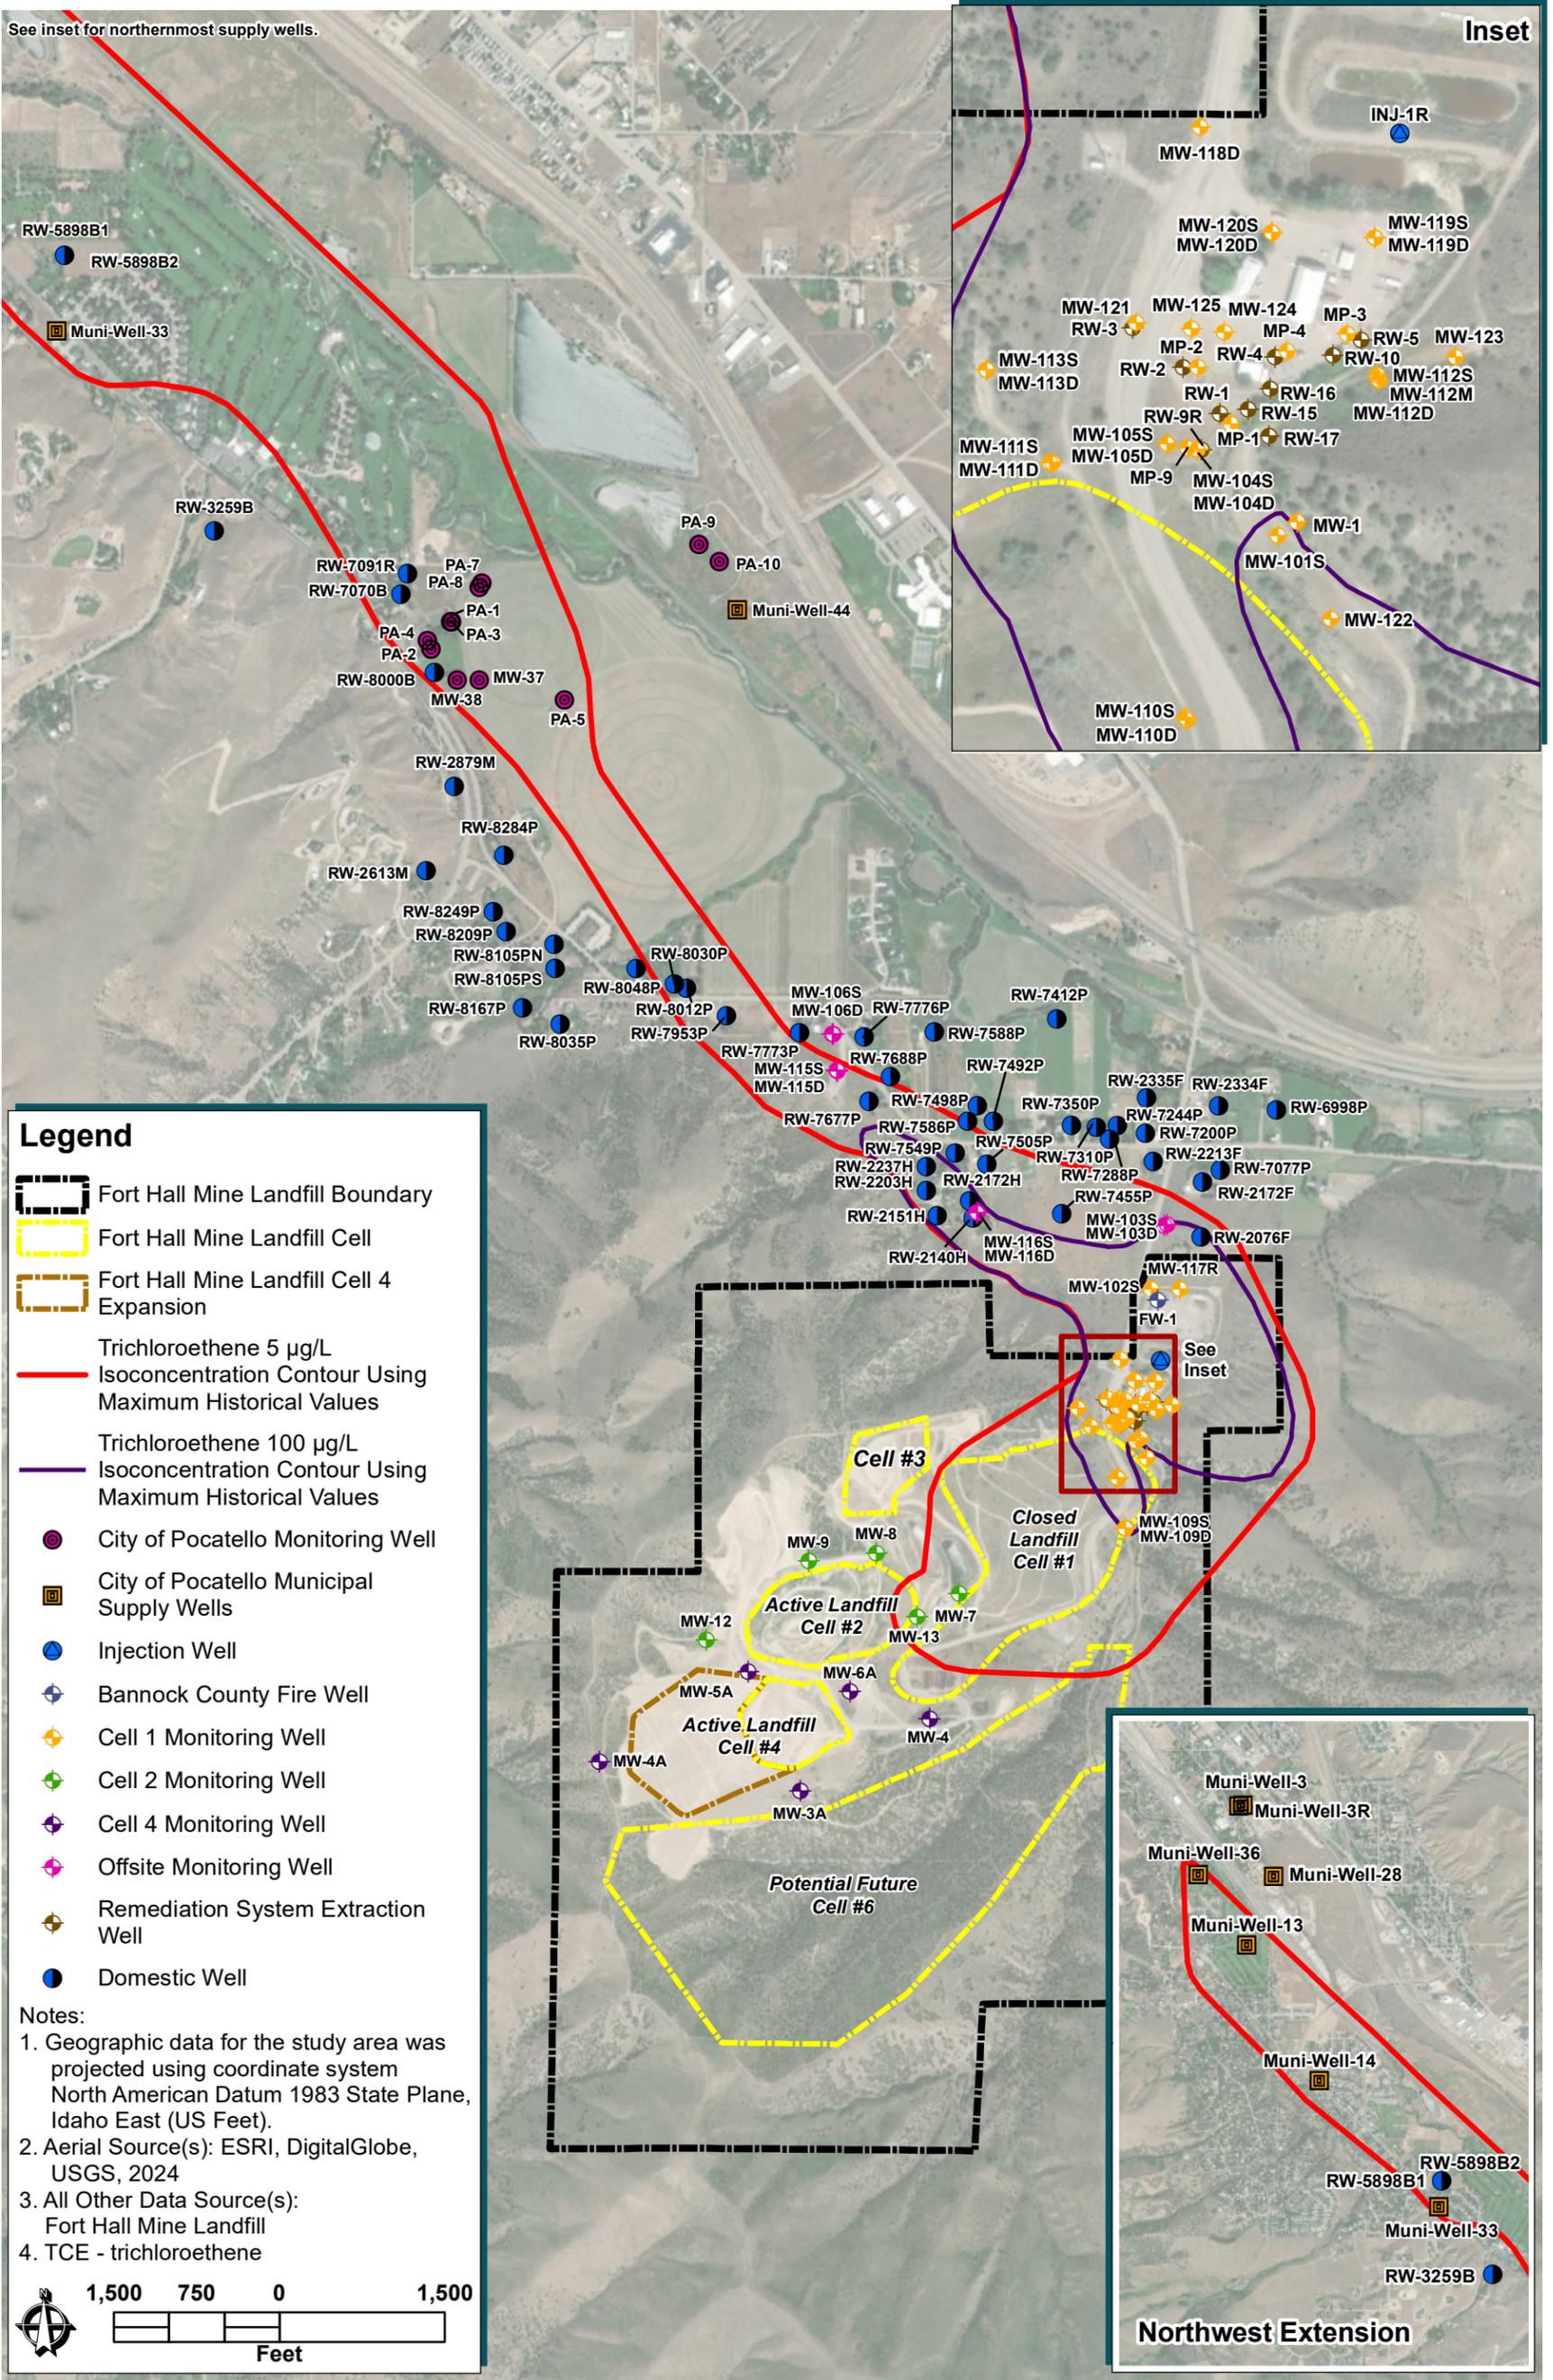

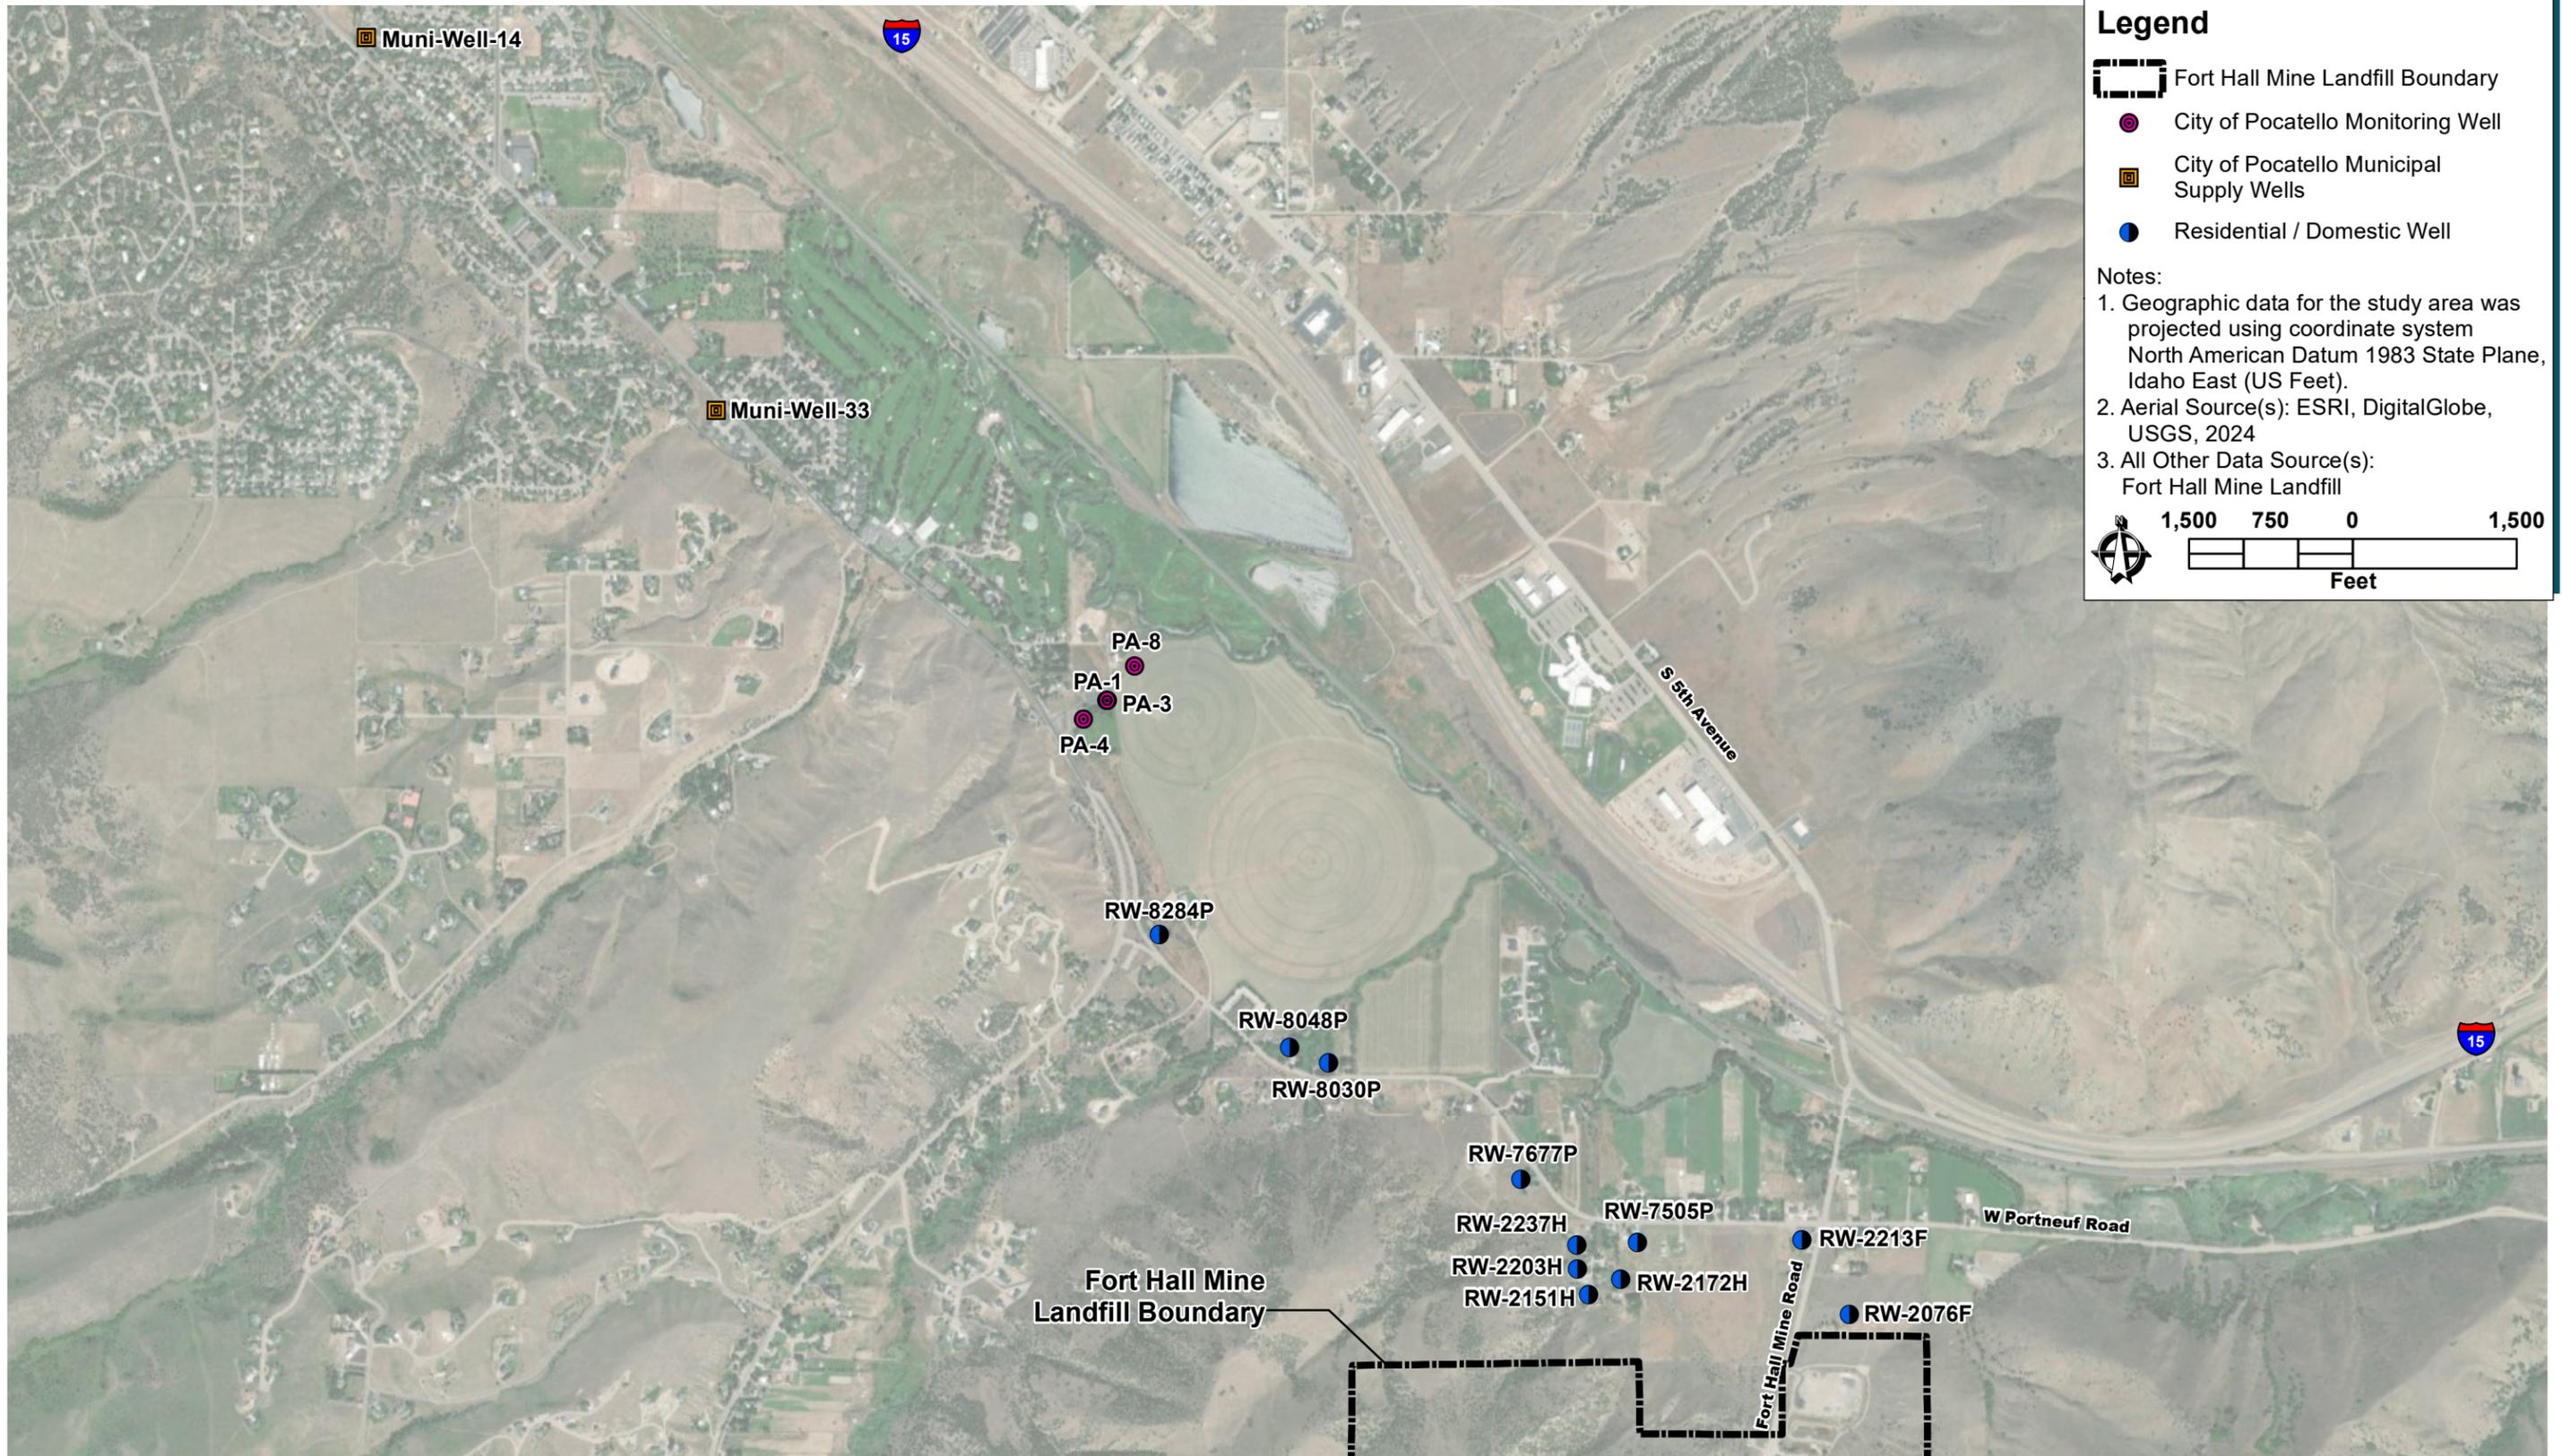

Draft By: K. Scheller Date: 9/11/2024 | Check By: H. Rolston Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/19/24



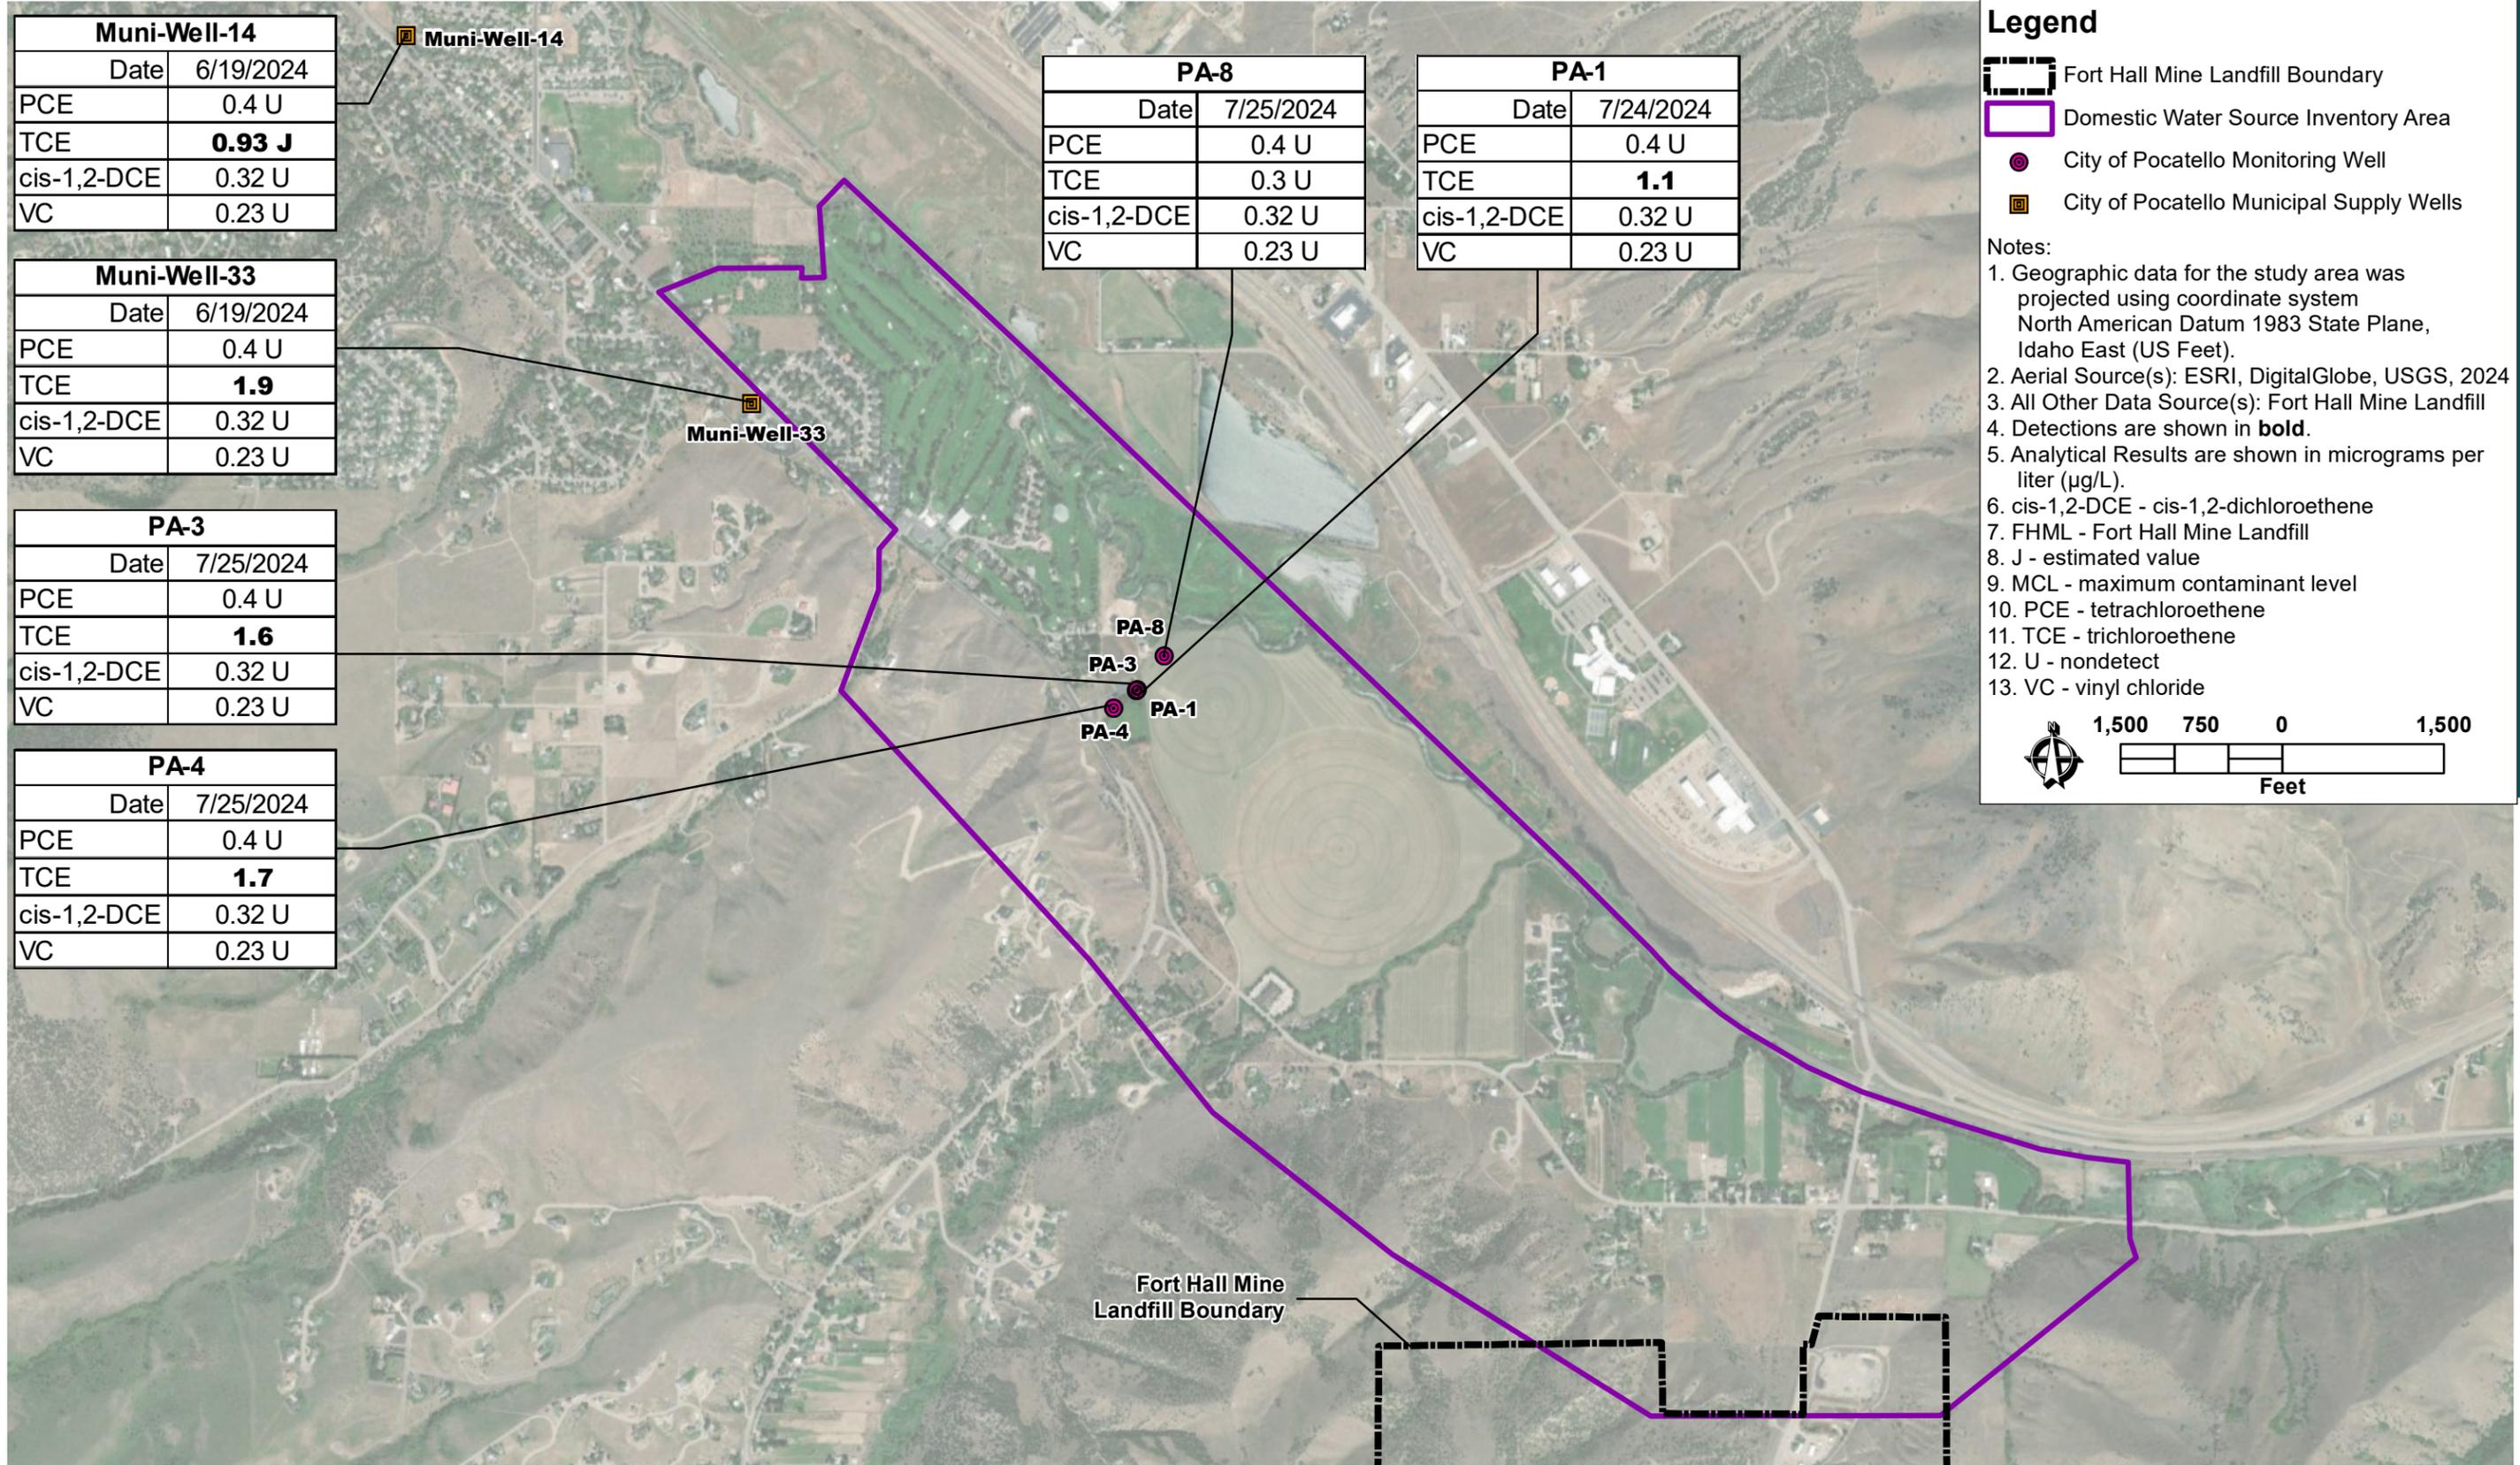

### Legend

- Fort Hall Mine Landfill Boundary
- Domestic Water Source Inventory Area
- City of Pocatello Monitoring Well
- City of Pocatello Municipal Supply Wells


Notes:

1. Geographic data for the study area was projected using coordinate system North American Datum 1983 State Plane, Idaho East (US Feet).
2. Aerial Source(s): ESRI, DigitalGlobe, USGS, 2024
3. All Other Data Source(s): Fort Hall Mine Landfill
4. Detections are shown in **bold**.
5. Analytical Results are shown in micrograms per liter (µg/L).
6. cis-1,2-DCE - cis-1,2-dichloroethene
7. FHML - Fort Hall Mine Landfill
8. J - estimated value
9. MCL - maximum contaminant level
10. PCE - tetrachloroethene
11. TCE - trichloroethene
12. U - nondetect
13. VC - vinyl chloride

1,500 750 0 1,500  
Feet


Draft By: K. Scheller Date: 9/11/2024 | Check By: H. Rolston Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/19/24



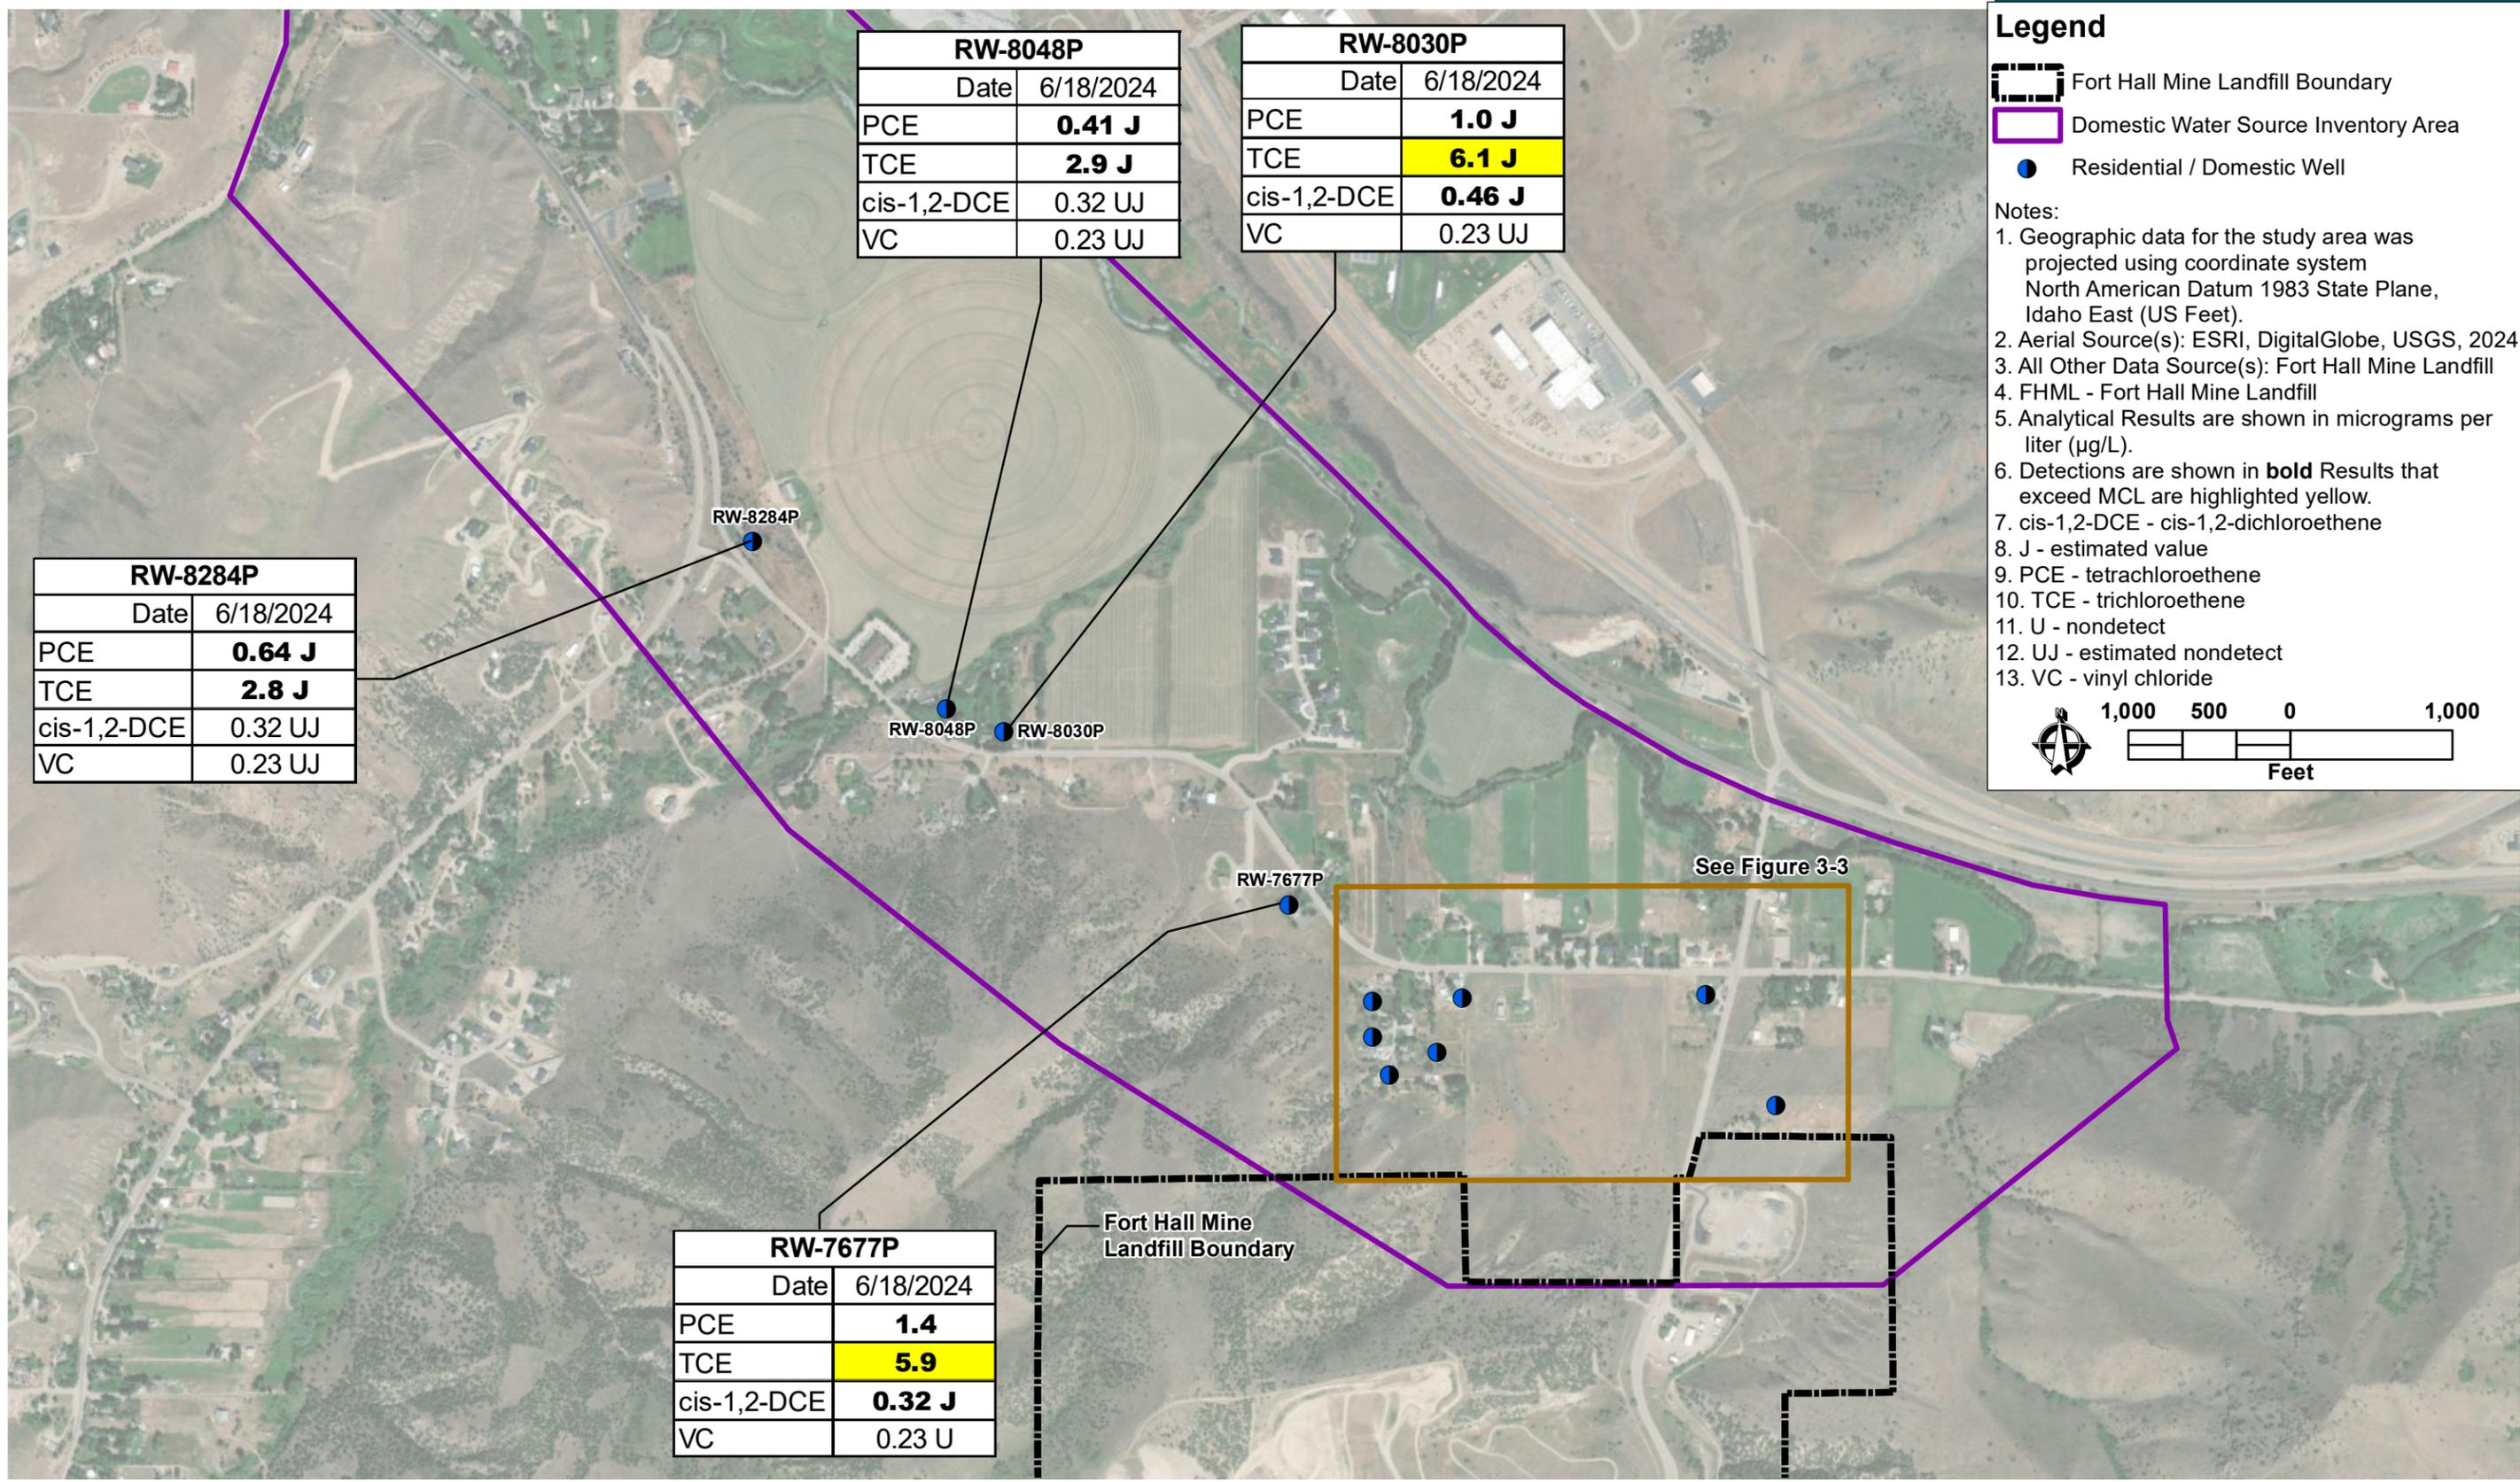


Draft By: K. Scheller Date: 9/6/2024 | Check By: L. Mulrooney Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/20/2024



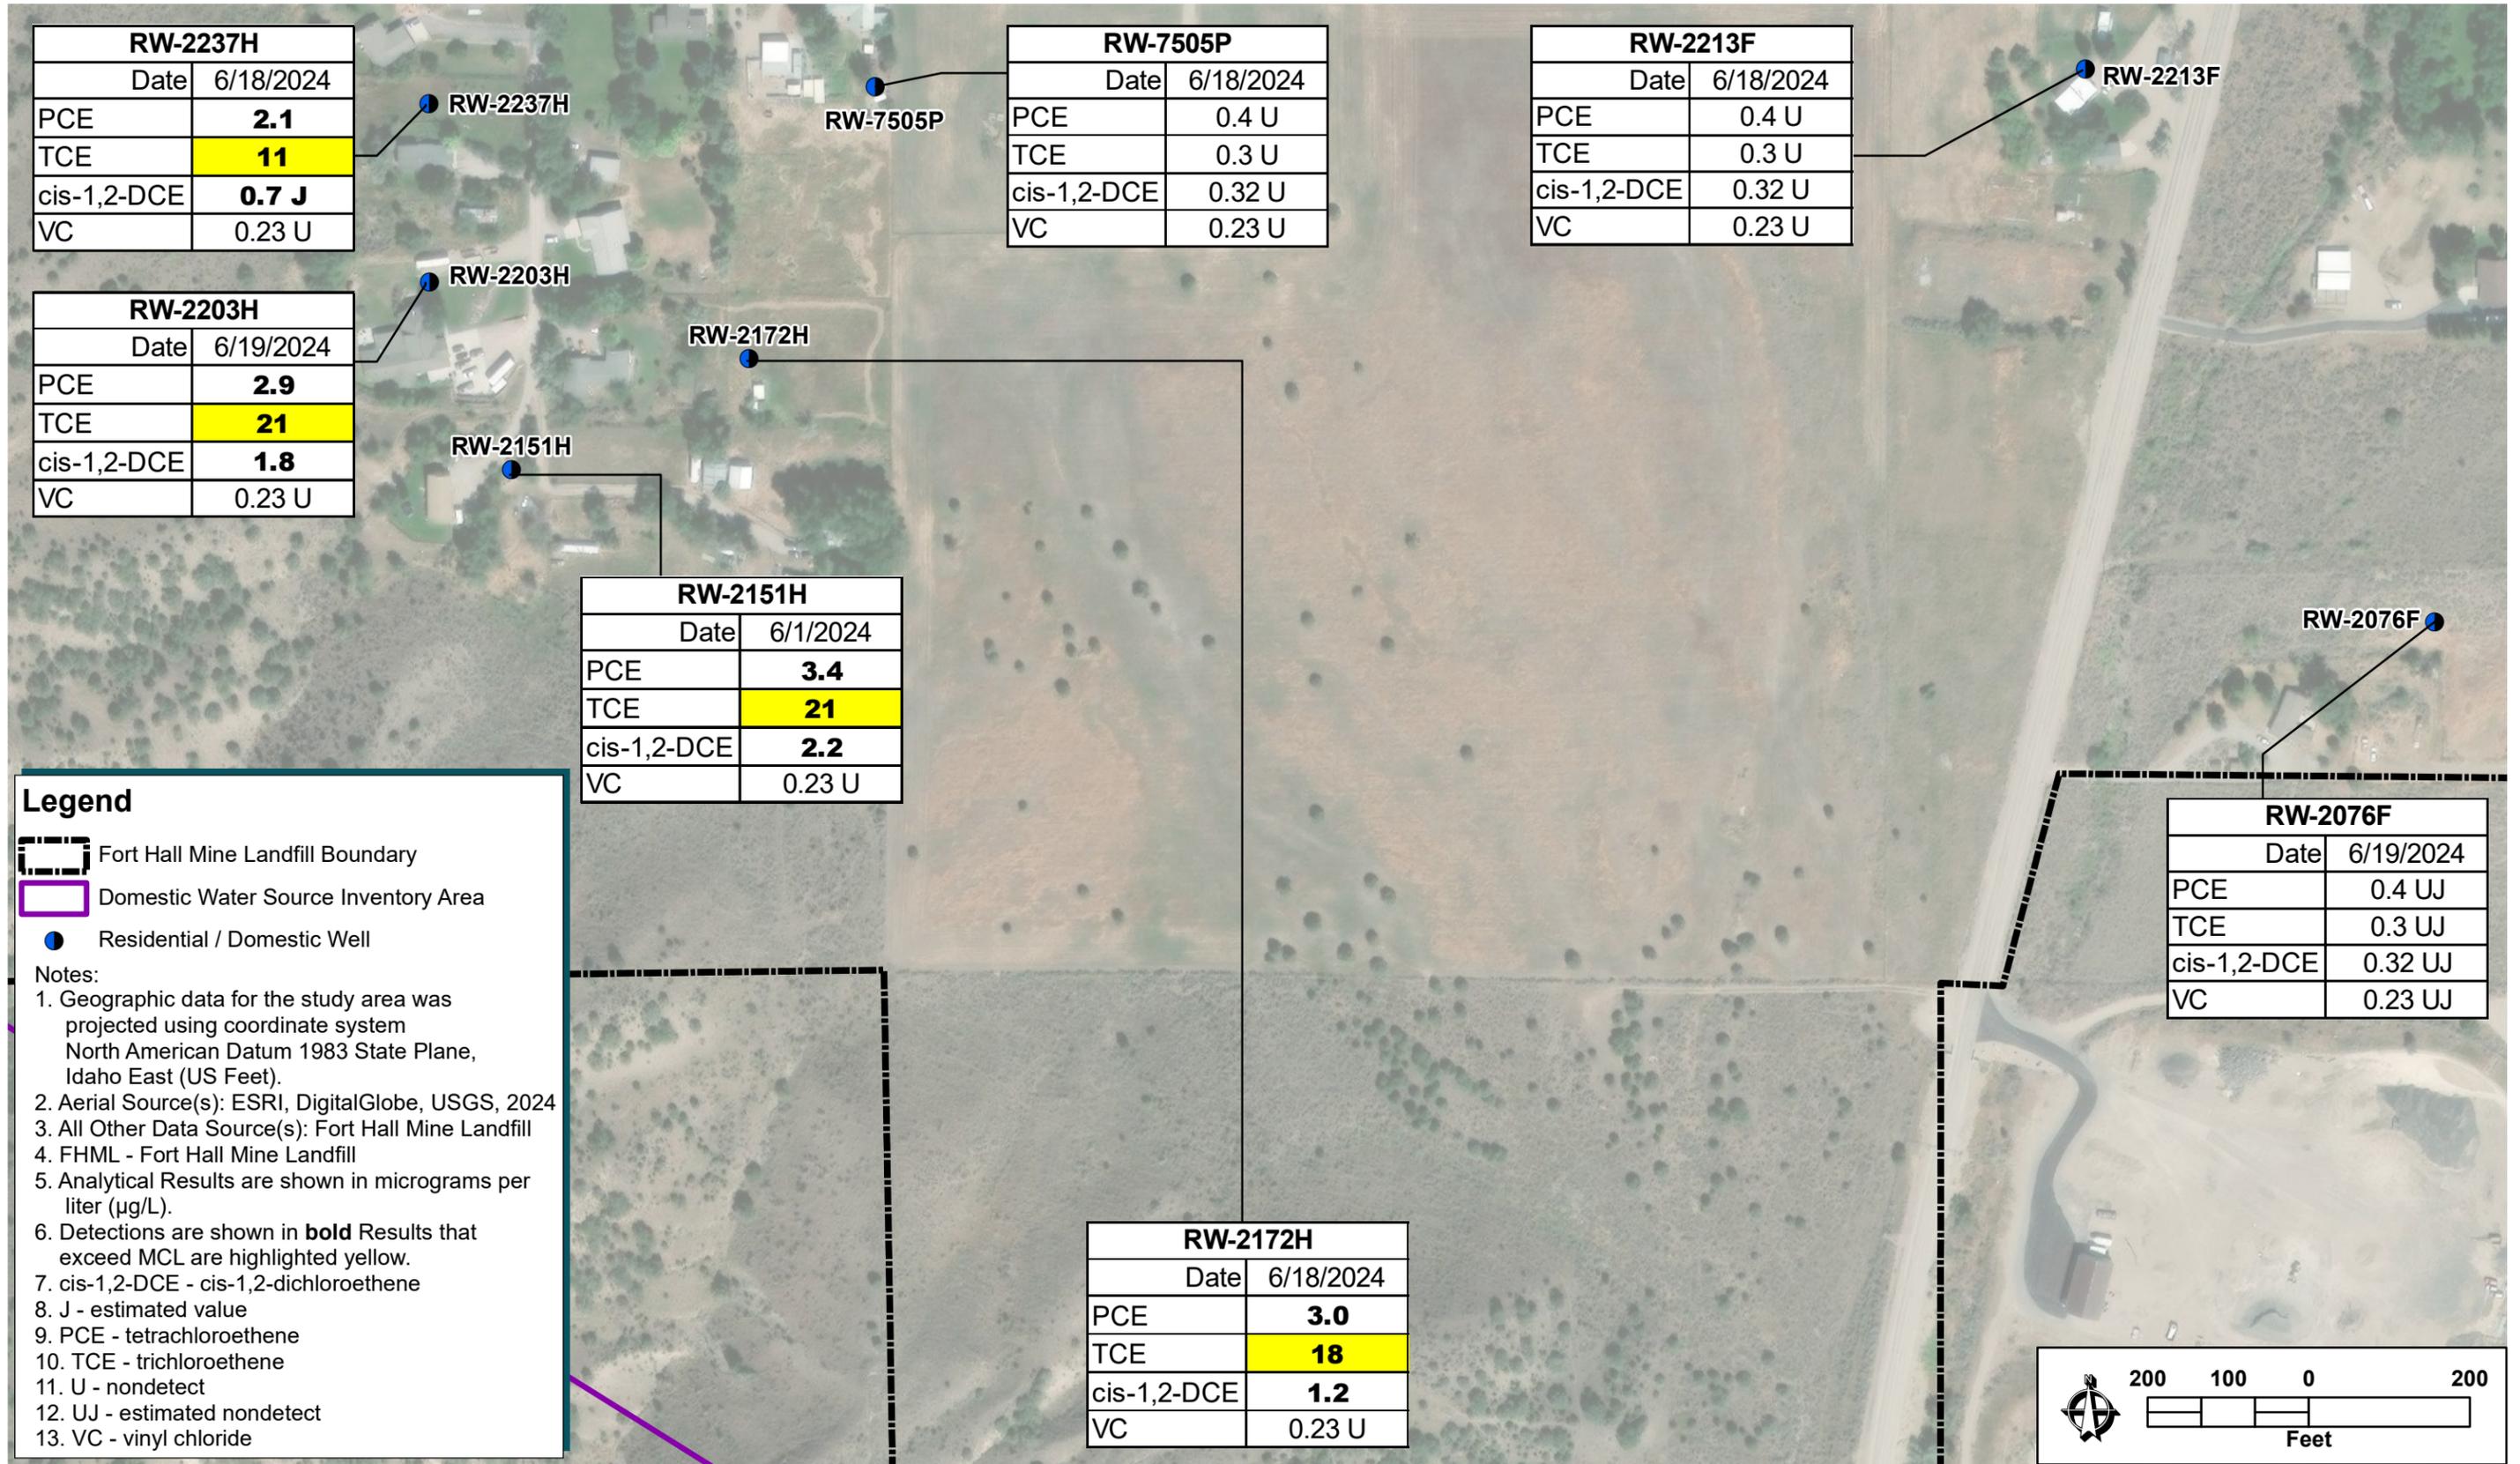

Draft By: K. Scheller Date: 9/6/2024 | Check By: E. Ehret Date: 9/13/2024 | Update By: K. Scheller Date: 9/17/2024 | Backcheck By: H. Rolston Date: 9/19/24



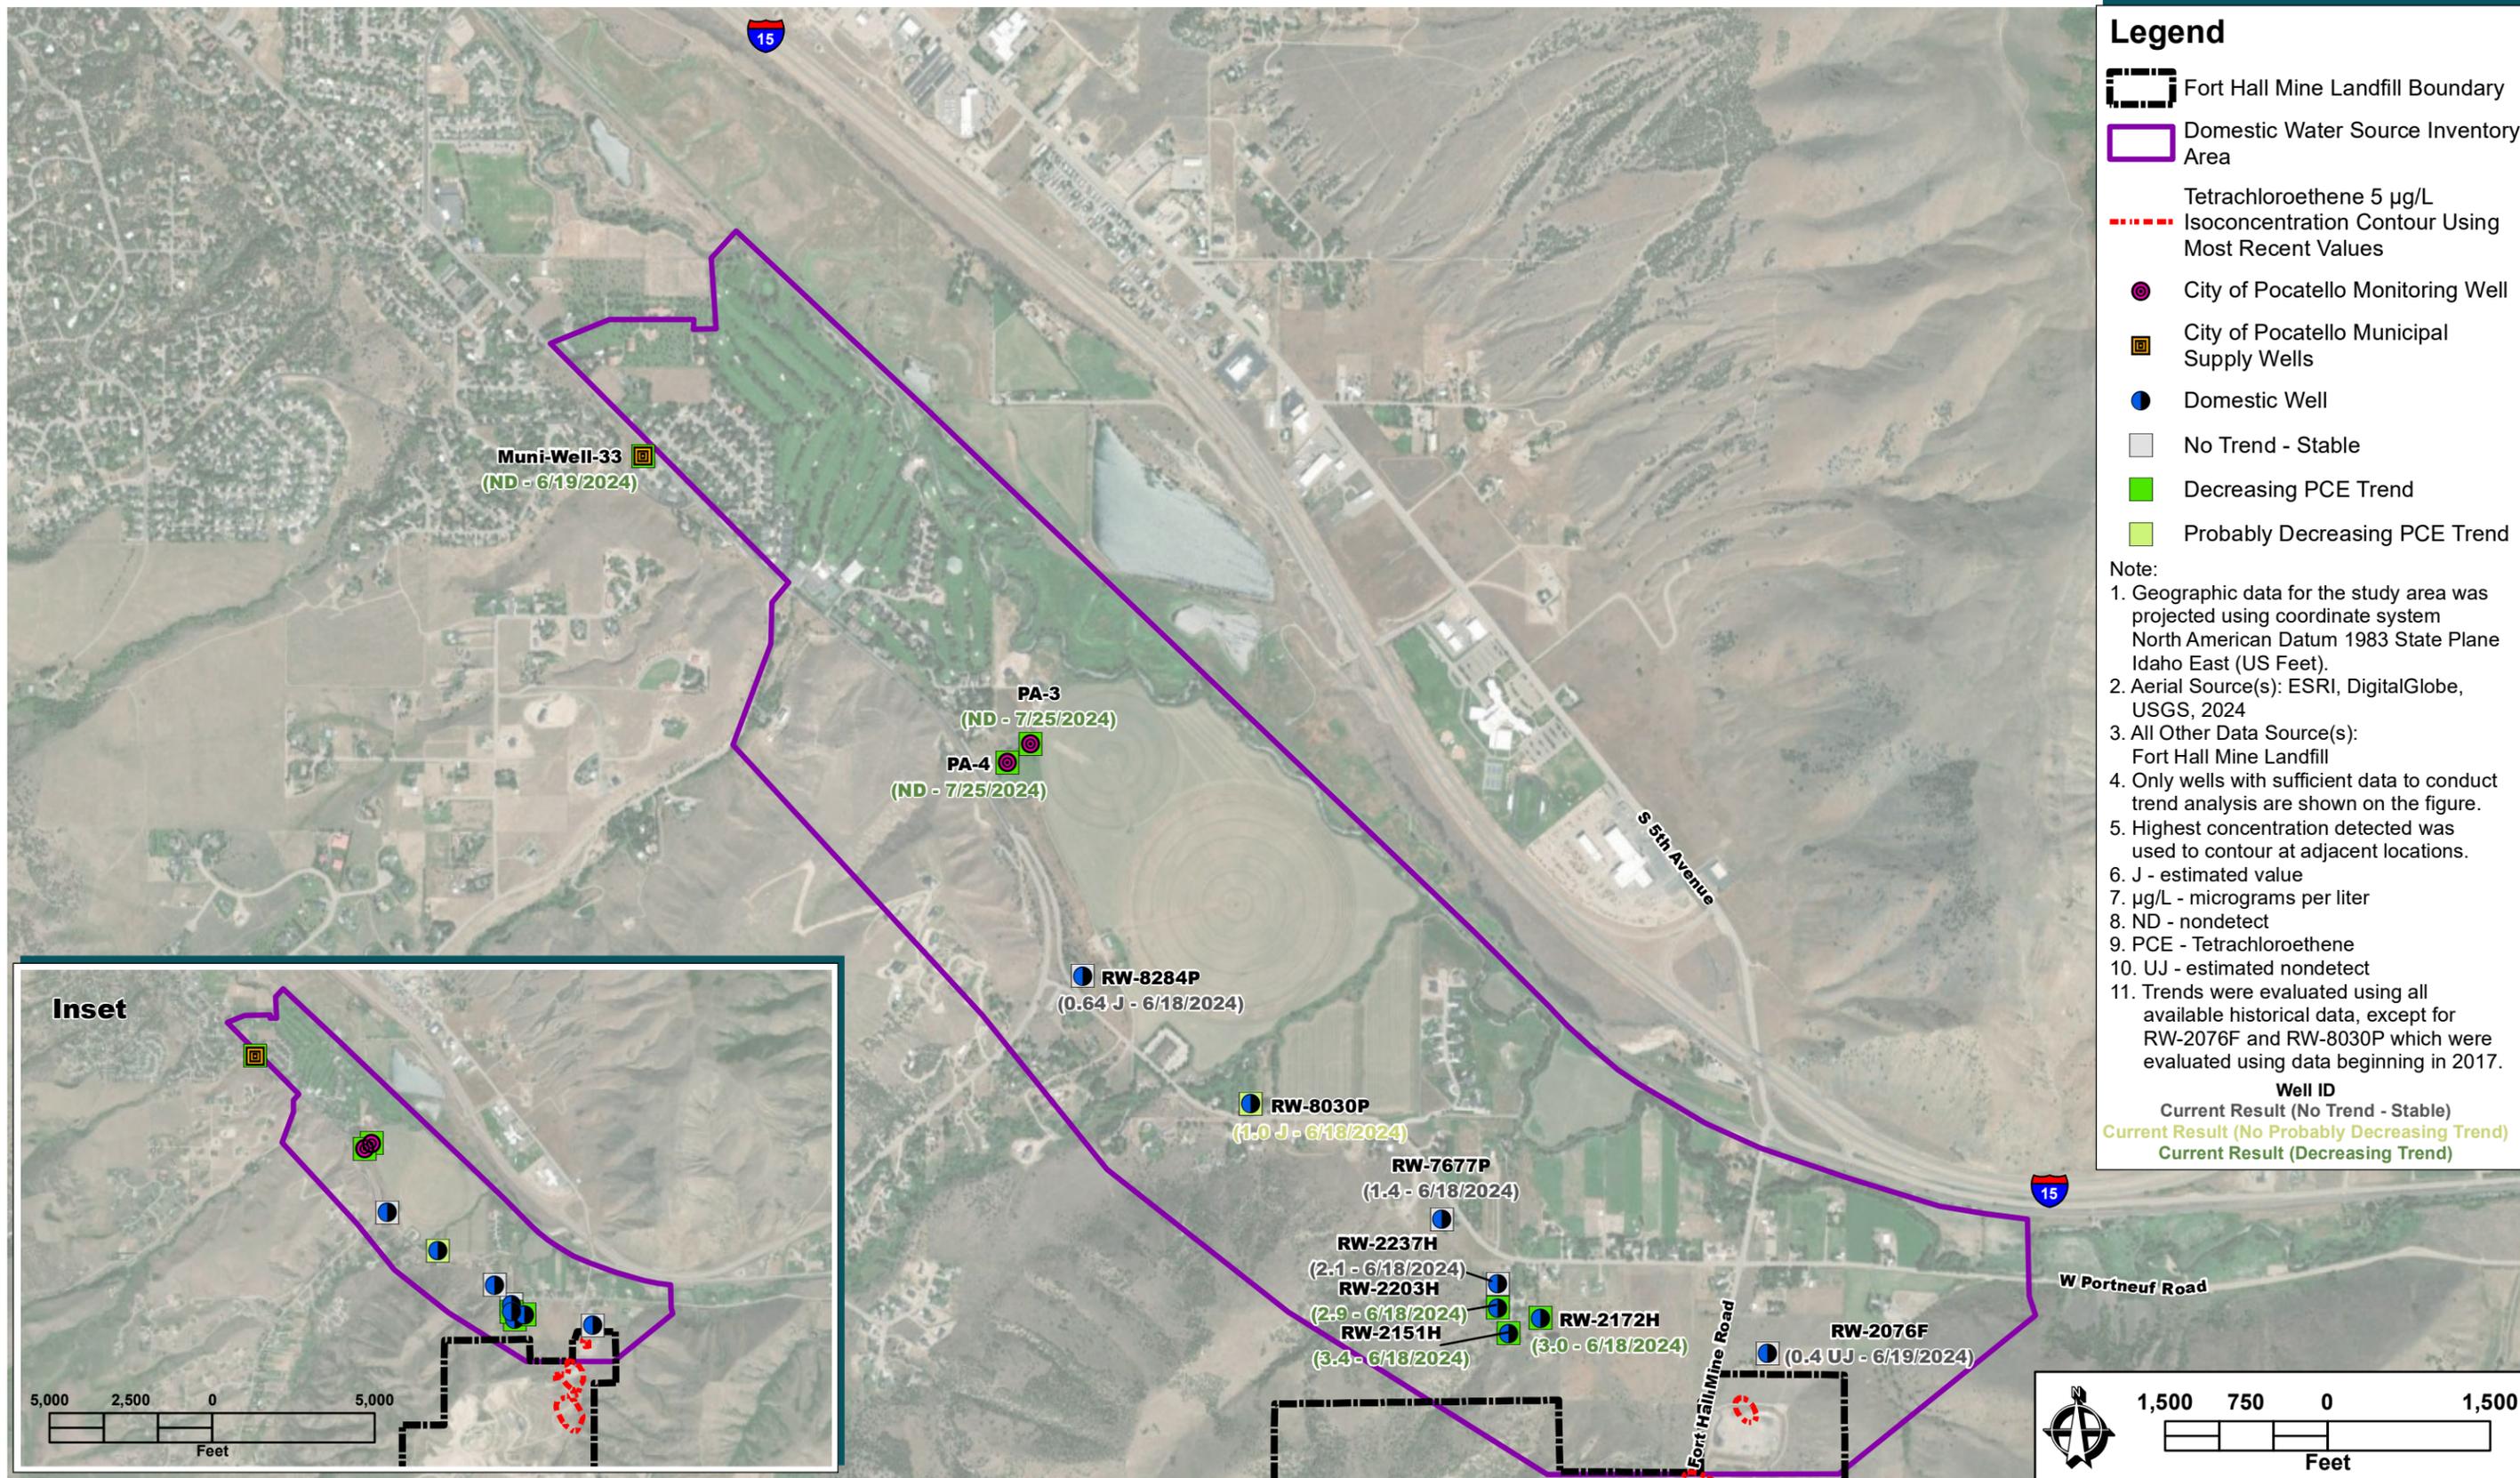

**Legend**


- Fort Hall Mine Landfill Boundary
- Domestic Water Source Inventory Area
- Tetrachloroethene 5 µg/L Isoconcentration Contour Using Most Recent Values
- City of Pocatello Monitoring Well
- City of Pocatello Municipal Supply Wells
- Domestic Well
- No Trend - Stable
- Decreasing PCE Trend
- Probably Decreasing PCE Trend

- Note:
1. Geographic data for the study area was projected using coordinate system North American Datum 1983 State Plane Idaho East (US Feet).
  2. Aerial Source(s): ESRI, DigitalGlobe, USGS, 2024
  3. All Other Data Source(s): Fort Hall Mine Landfill
  4. Only wells with sufficient data to conduct trend analysis are shown on the figure.
  5. Highest concentration detected was used to contour at adjacent locations.
  6. J - estimated value
  7. µg/L - micrograms per liter
  8. ND - nondetect
  9. PCE - Tetrachloroethene
  10. UJ - estimated nondetect
  11. Trends were evaluated using all available historical data, except for RW-2076F and RW-8030P which were evaluated using data beginning in 2017.


**Well ID**  
 Current Result (No Trend - Stable)  
 Current Result (No Probably Decreasing Trend)  
 Current Result (Decreasing Trend)

Draft By: K. Scheller Date: 9/11/2024 | Check By: H. Rolston Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/20/2024



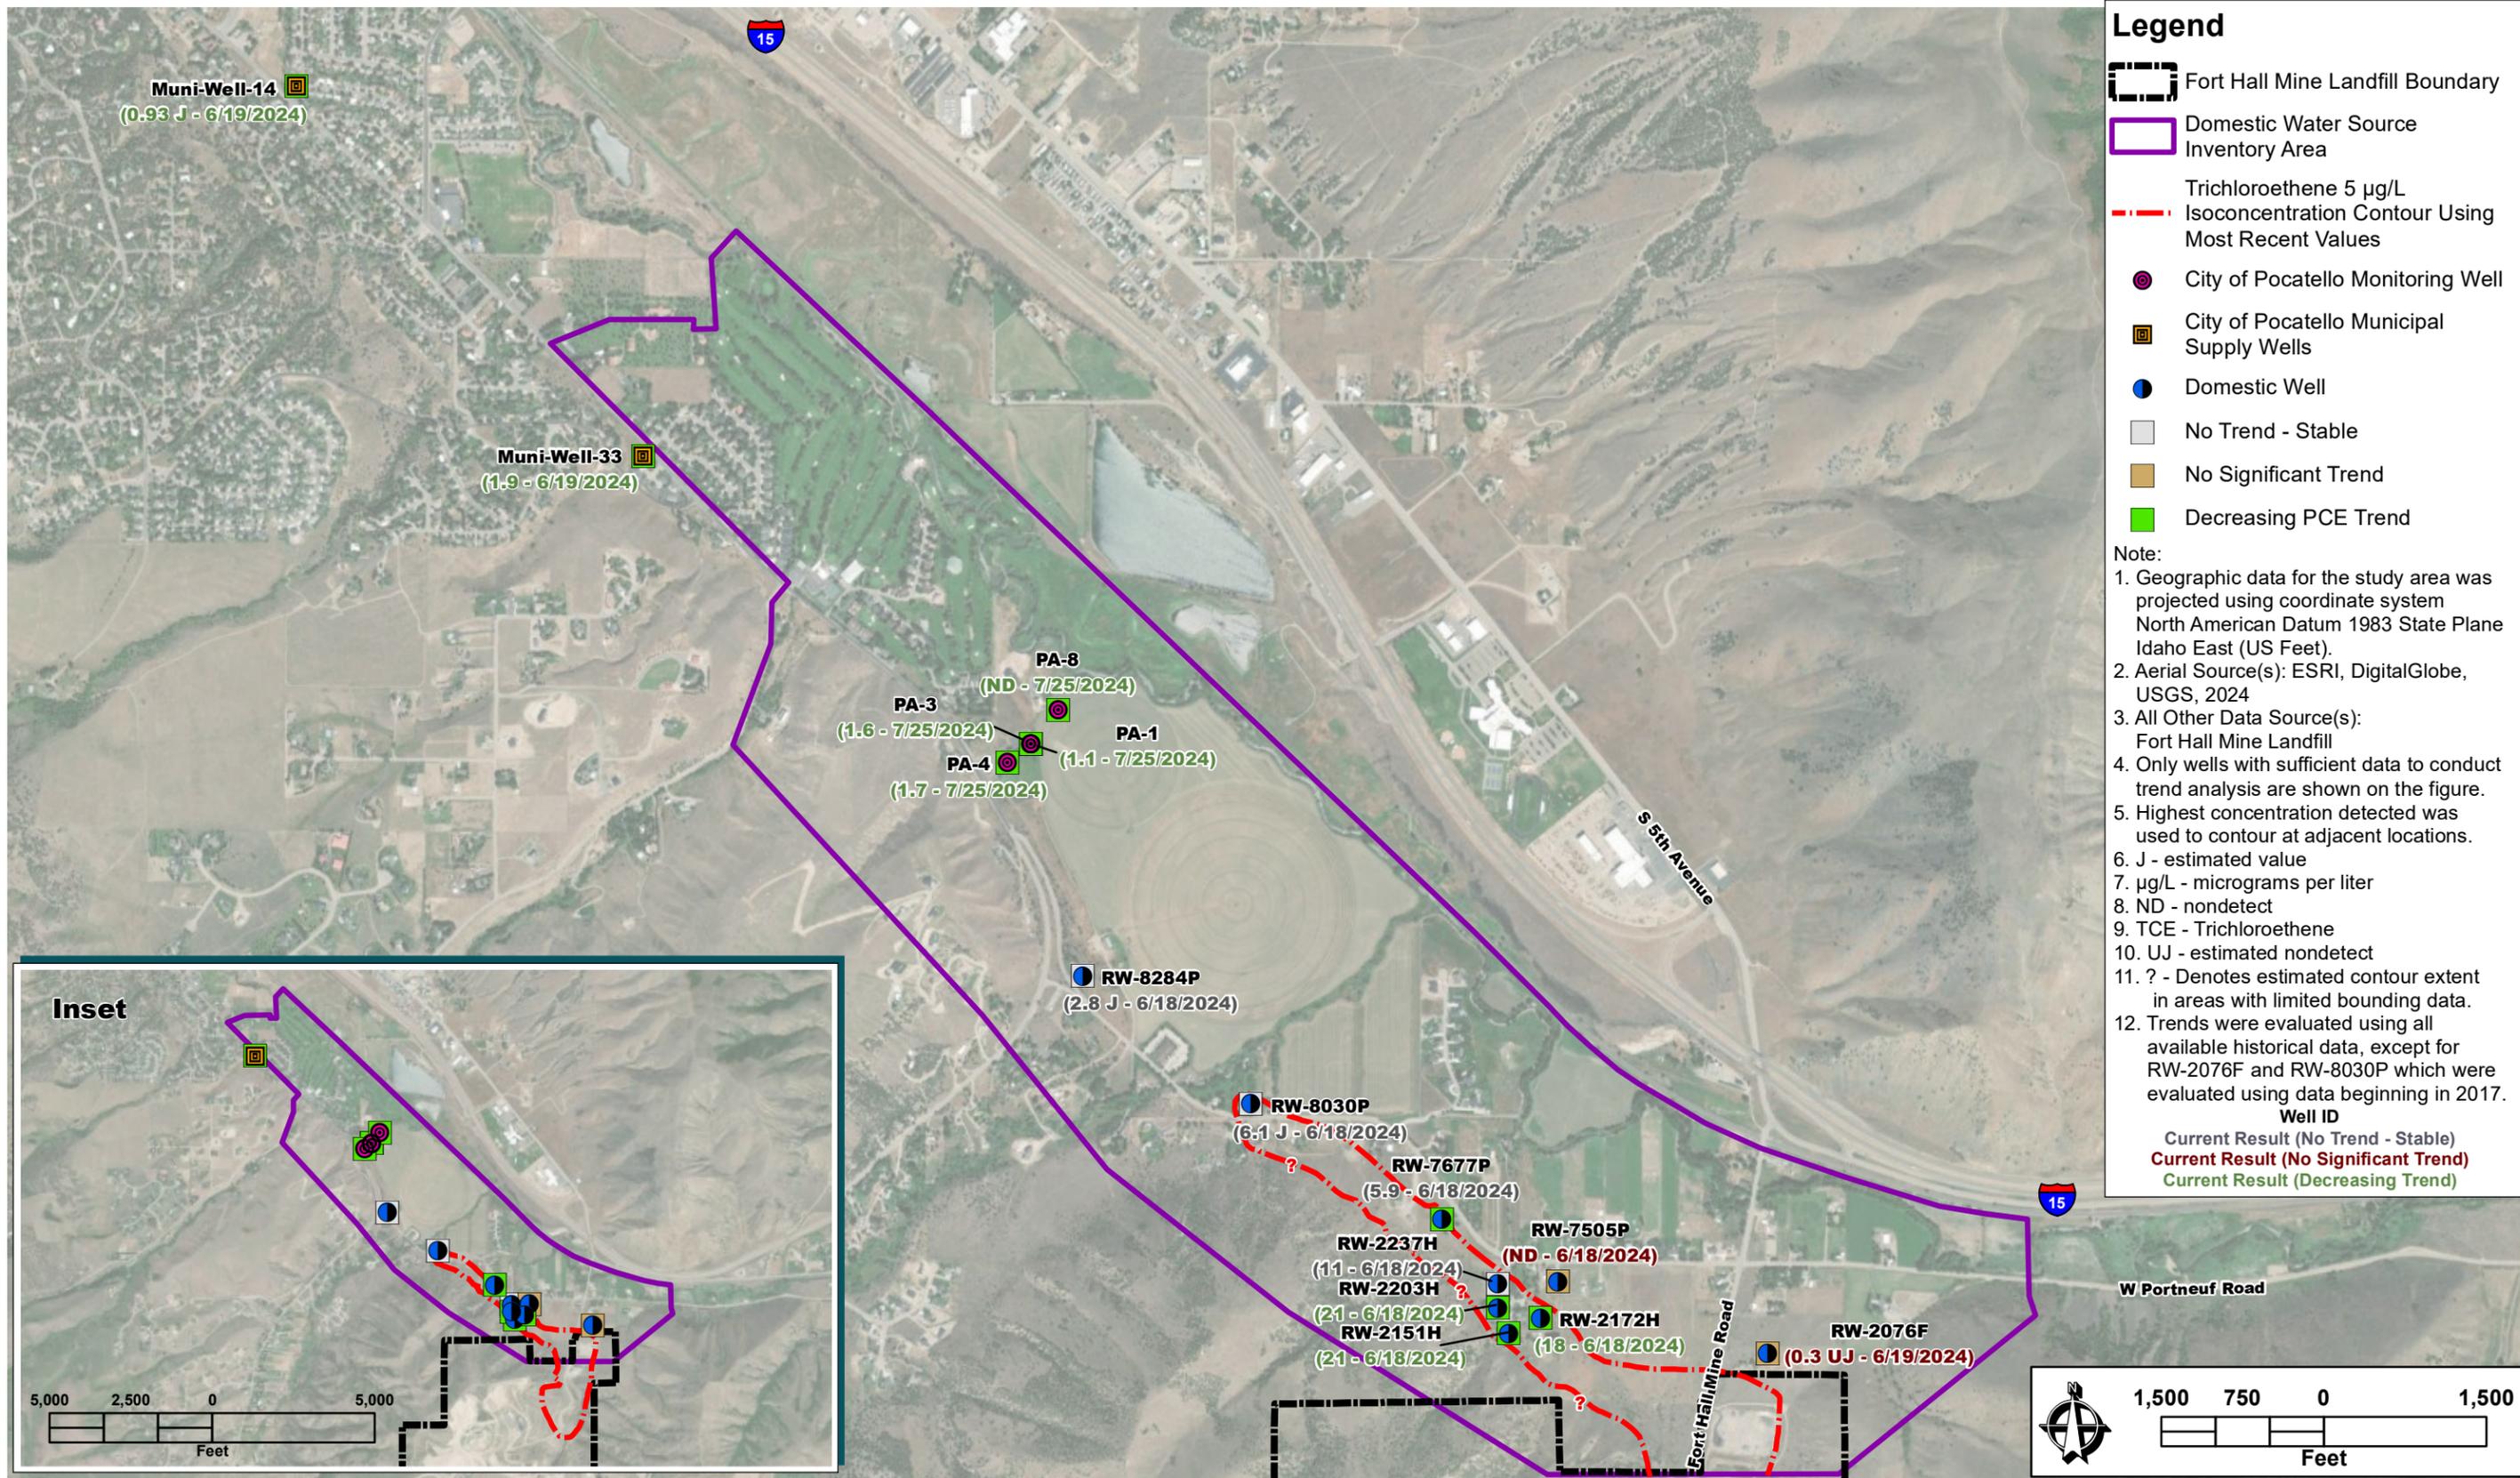

Draft By: K. Scheller Date: 9/11/2024 | Check By: H. Rolston Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/20/2024

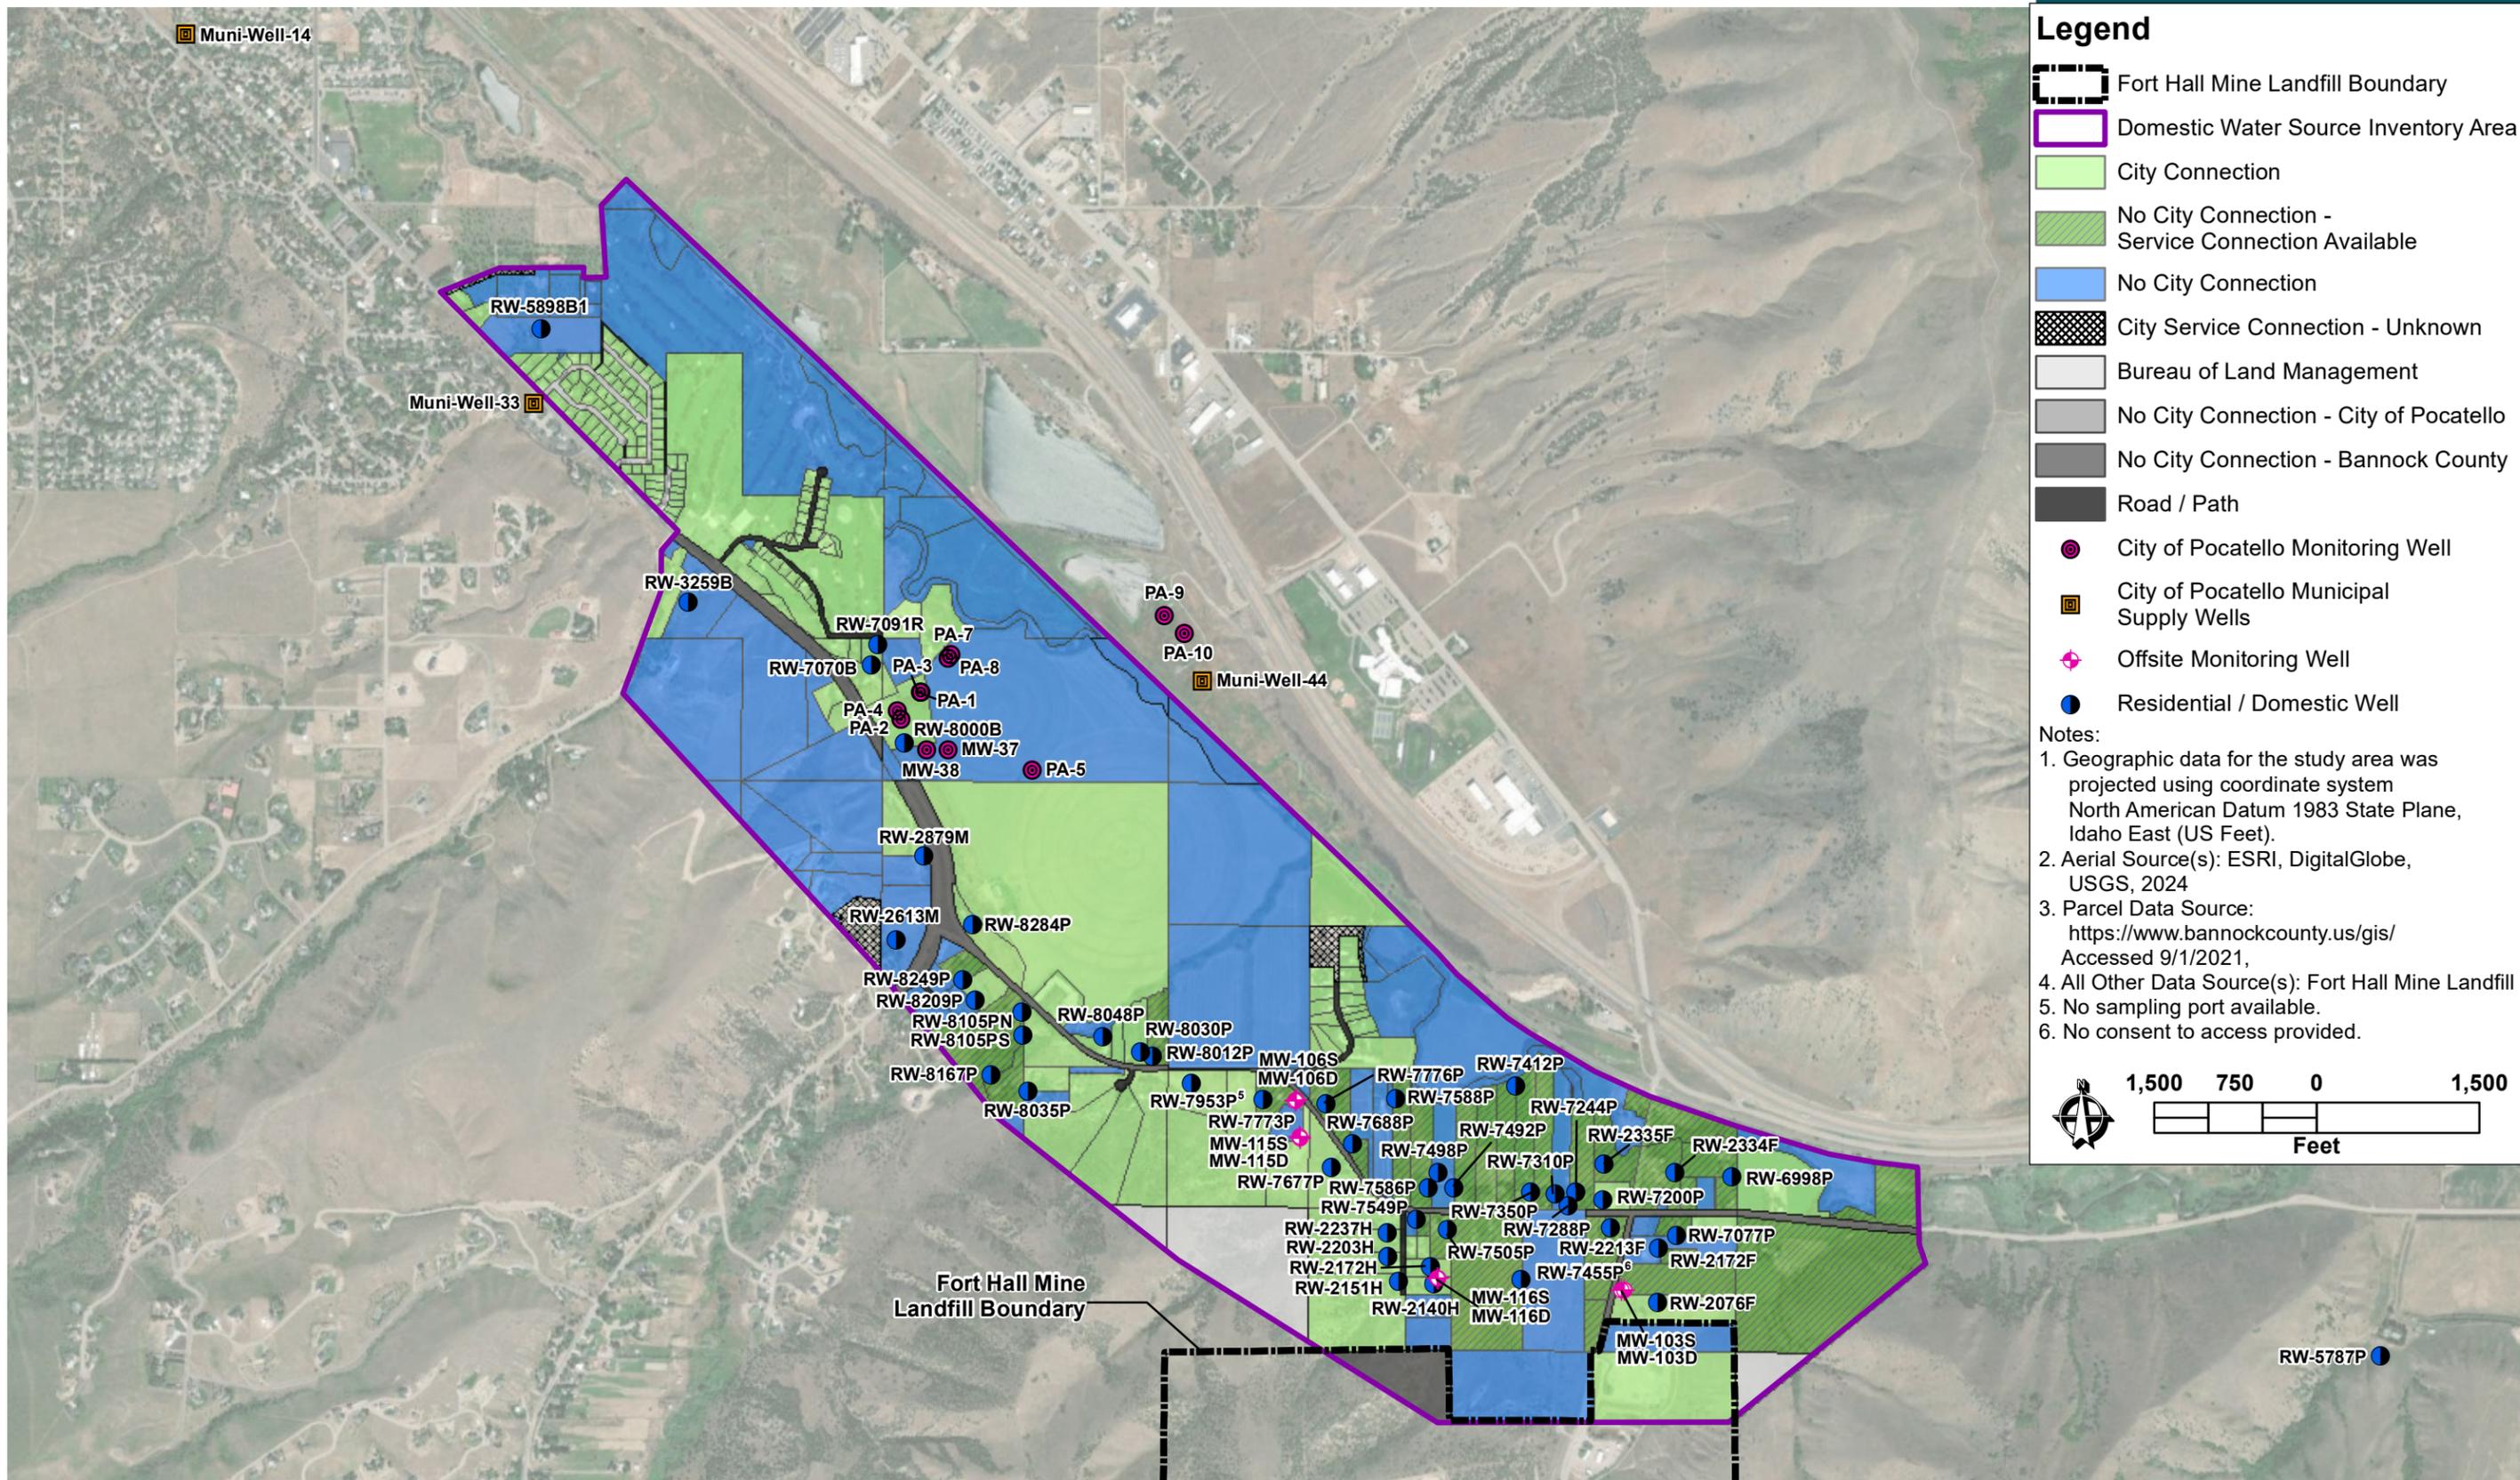

### Legend

- Fort Hall Mine Landfill Boundary
- Domestic Water Source Inventory Area
- City Connection
- No City Connection - Service Connection Available
- No City Connection
- City Service Connection - Unknown
- Bureau of Land Management
- No City Connection - City of Pocatello
- No City Connection - Bannock County
- Road / Path
- City of Pocatello Monitoring Well
- City of Pocatello Municipal Supply Wells
- Offsite Monitoring Well
- Residential / Domestic Well


Notes:

- Geographic data for the study area was projected using coordinate system North American Datum 1983 State Plane, Idaho East (US Feet).
- Aerial Source(s): ESRI, DigitalGlobe, USGS, 2024
- Parcel Data Source: <https://www.bannockcounty.us/gis/> Accessed 9/1/2021,
- All Other Data Source(s): Fort Hall Mine Landfill
- No sampling port available.
- No consent to access provided.

1,500 750 0 1,500  
Feet

Draft By: K. Scheller Date: 9/11/2024 | Check By: H. Rolston Date: 9/18/2024 | Update By: K. Scheller Date: 9/19/2024 | Backcheck By: H. Rolston Date: 9/20/2024



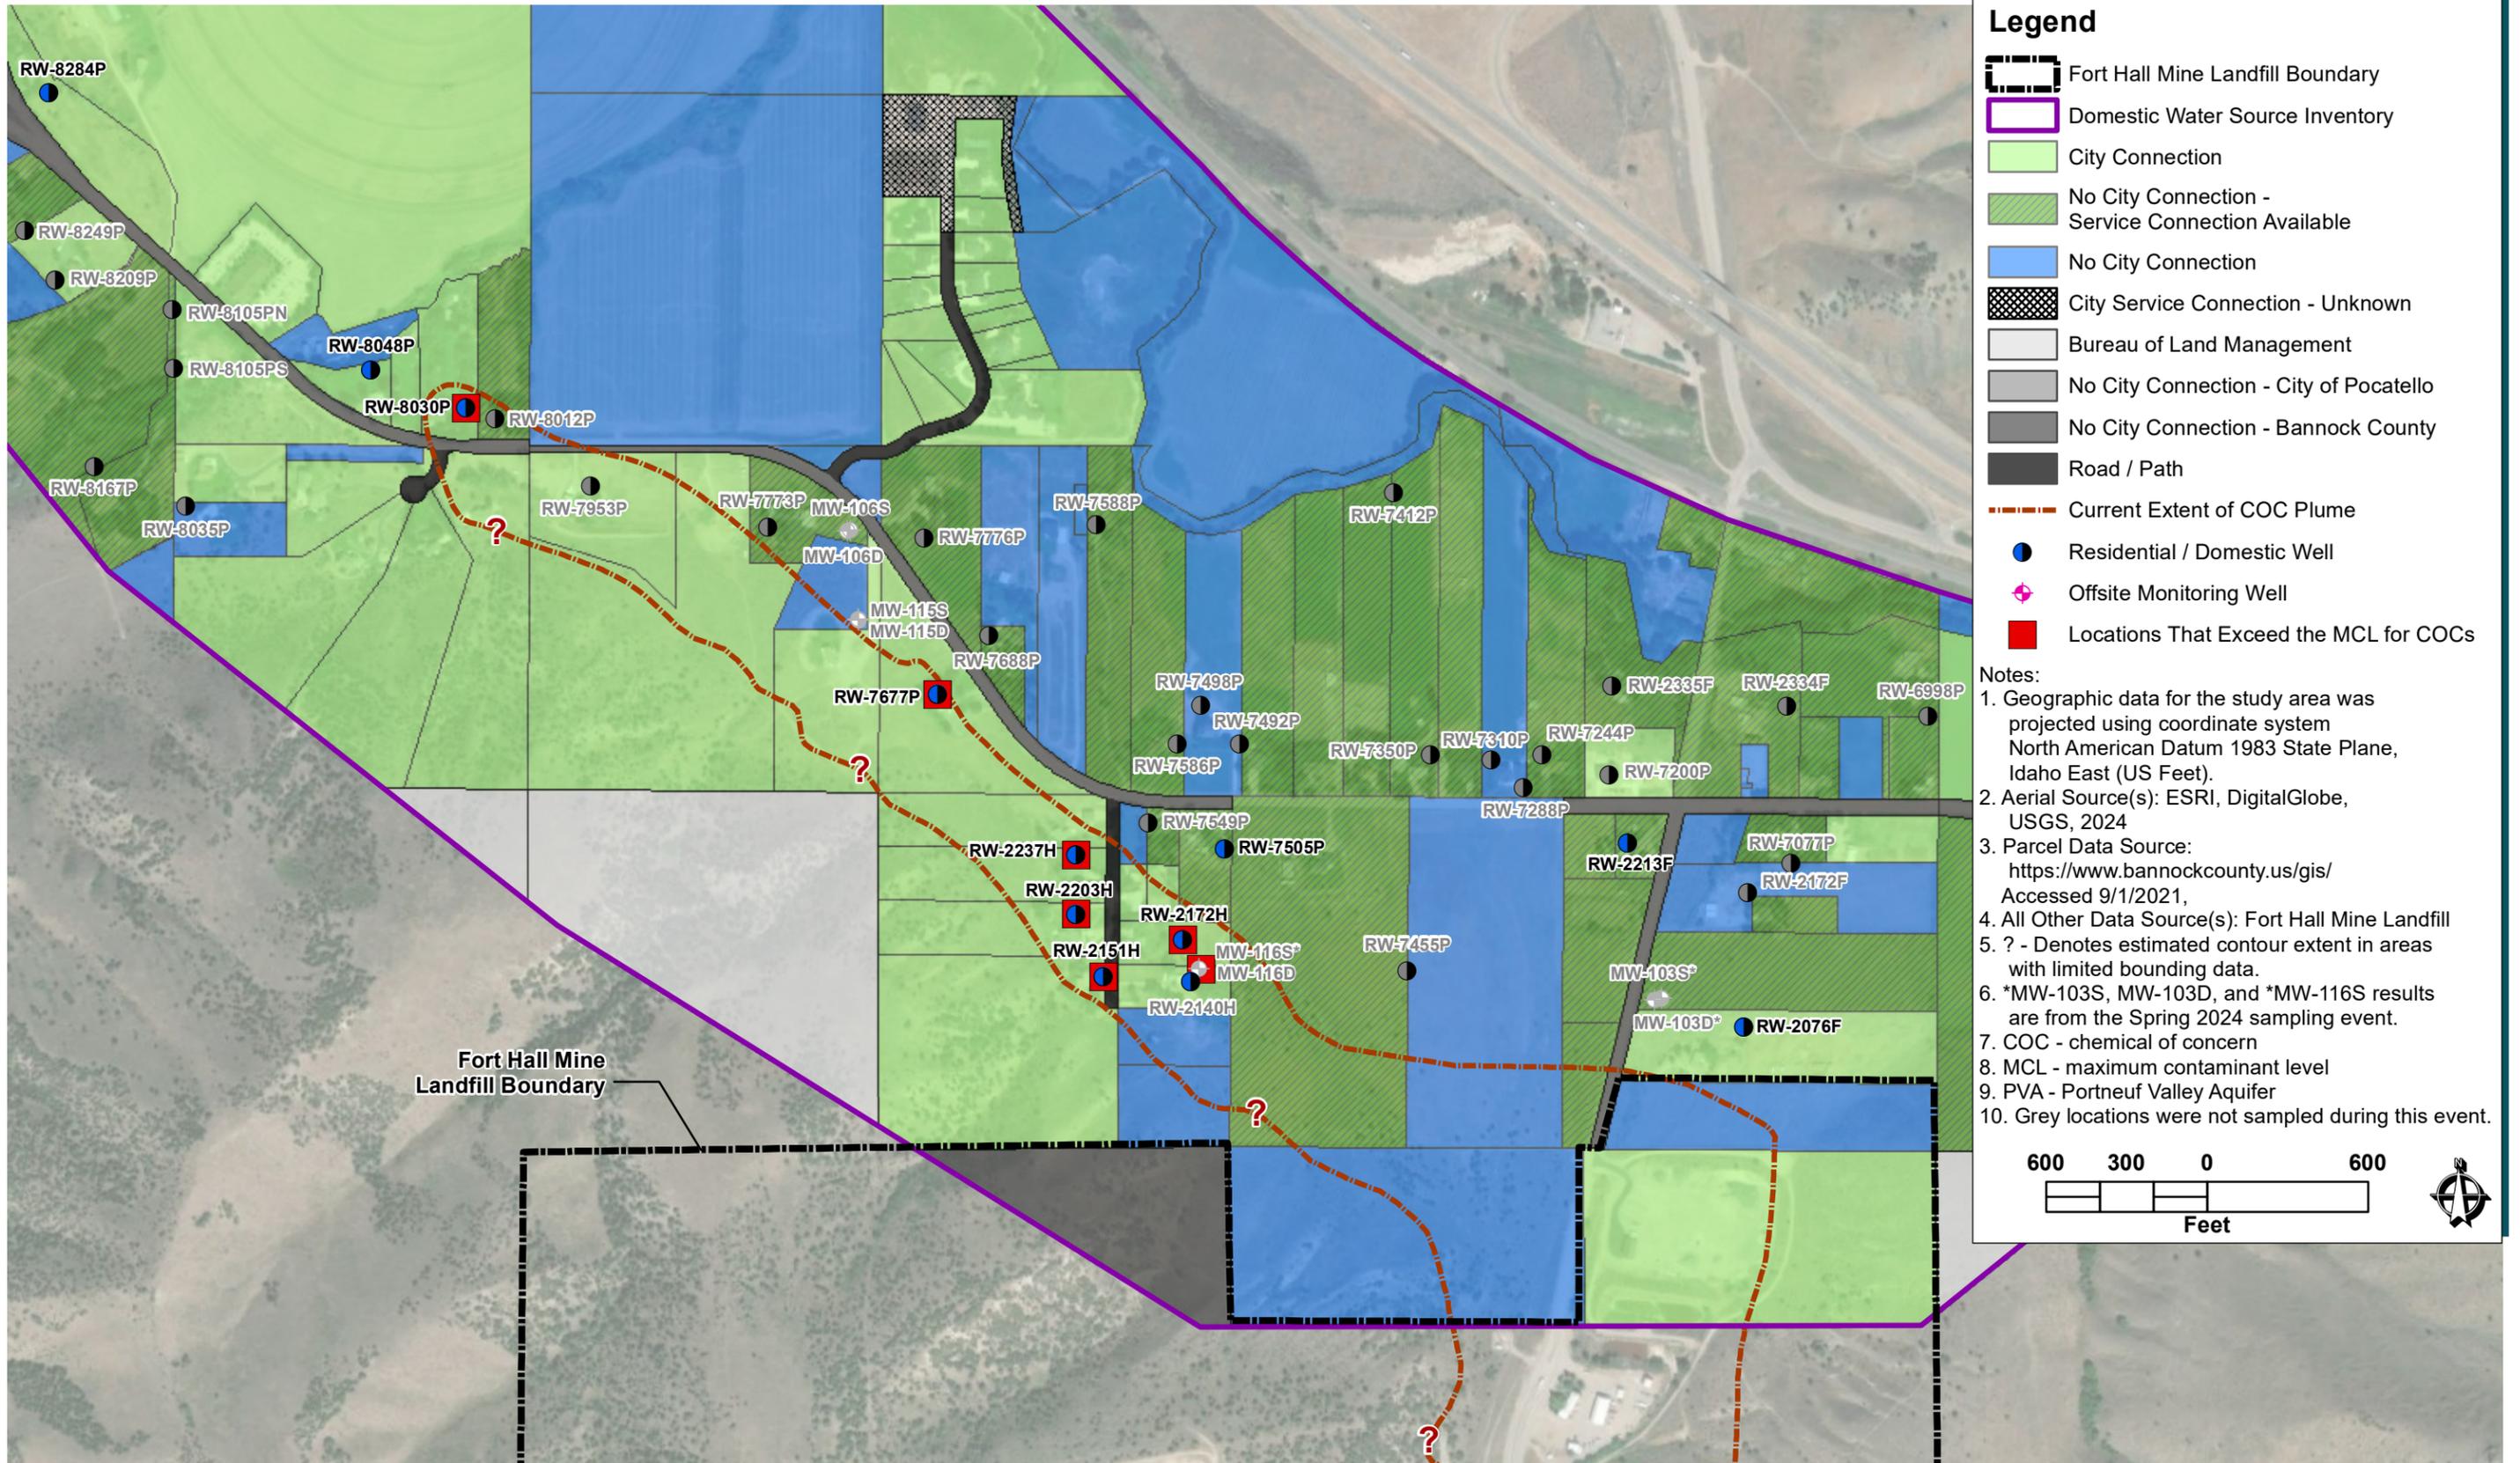

### Legend

- Fort Hall Mine Landfill Boundary
- Domestic Water Source Inventory
- City Connection
- No City Connection - Service Connection Available
- No City Connection
- City Service Connection - Unknown
- Bureau of Land Management
- No City Connection - City of Pocatello
- No City Connection - Bannock County
- Road / Path
- Current Extent of COC Plume
- Residential / Domestic Well
- Offsite Monitoring Well
- Locations That Exceeded the MCL for COCs

Notes:


1. Geographic data for the study area was projected using coordinate system North American Datum 1983 State Plane, Idaho East (US Feet).
2. Aerial Source(s): ESRI, DigitalGlobe, USGS, 2024
3. Parcel Data Source: <https://www.bannockcounty.us/gis/> Accessed 9/1/2021,
4. All Other Data Source(s): Fort Hall Mine Landfill
5. ? - Denotes estimated contour extent in areas with limited bounding data.
6. \*MW-103S, MW-103D, and \*MW-116S results are from the Spring 2024 sampling event.
7. COC - chemical of concern
8. MCL - maximum contaminant level
9. PVA - Portneuf Valley Aquifer
10. Grey locations were not sampled during this event.

600 300 0 600  
Feet

Draft By: K. Scheller Date: 9/6/2024 | Check By: E. Ehret Date: 9/9/2024 | Update By: K. Scheller Date: 9/11/2024 | Backcheck By: E. Ehret Date: 9/13/2024



Figure 5-2  
Lower PVA Domestic Water Source Inventory Area  
Parcel and Well Information Showing Current Trichloroethene  
and Tetrachloroethene Results

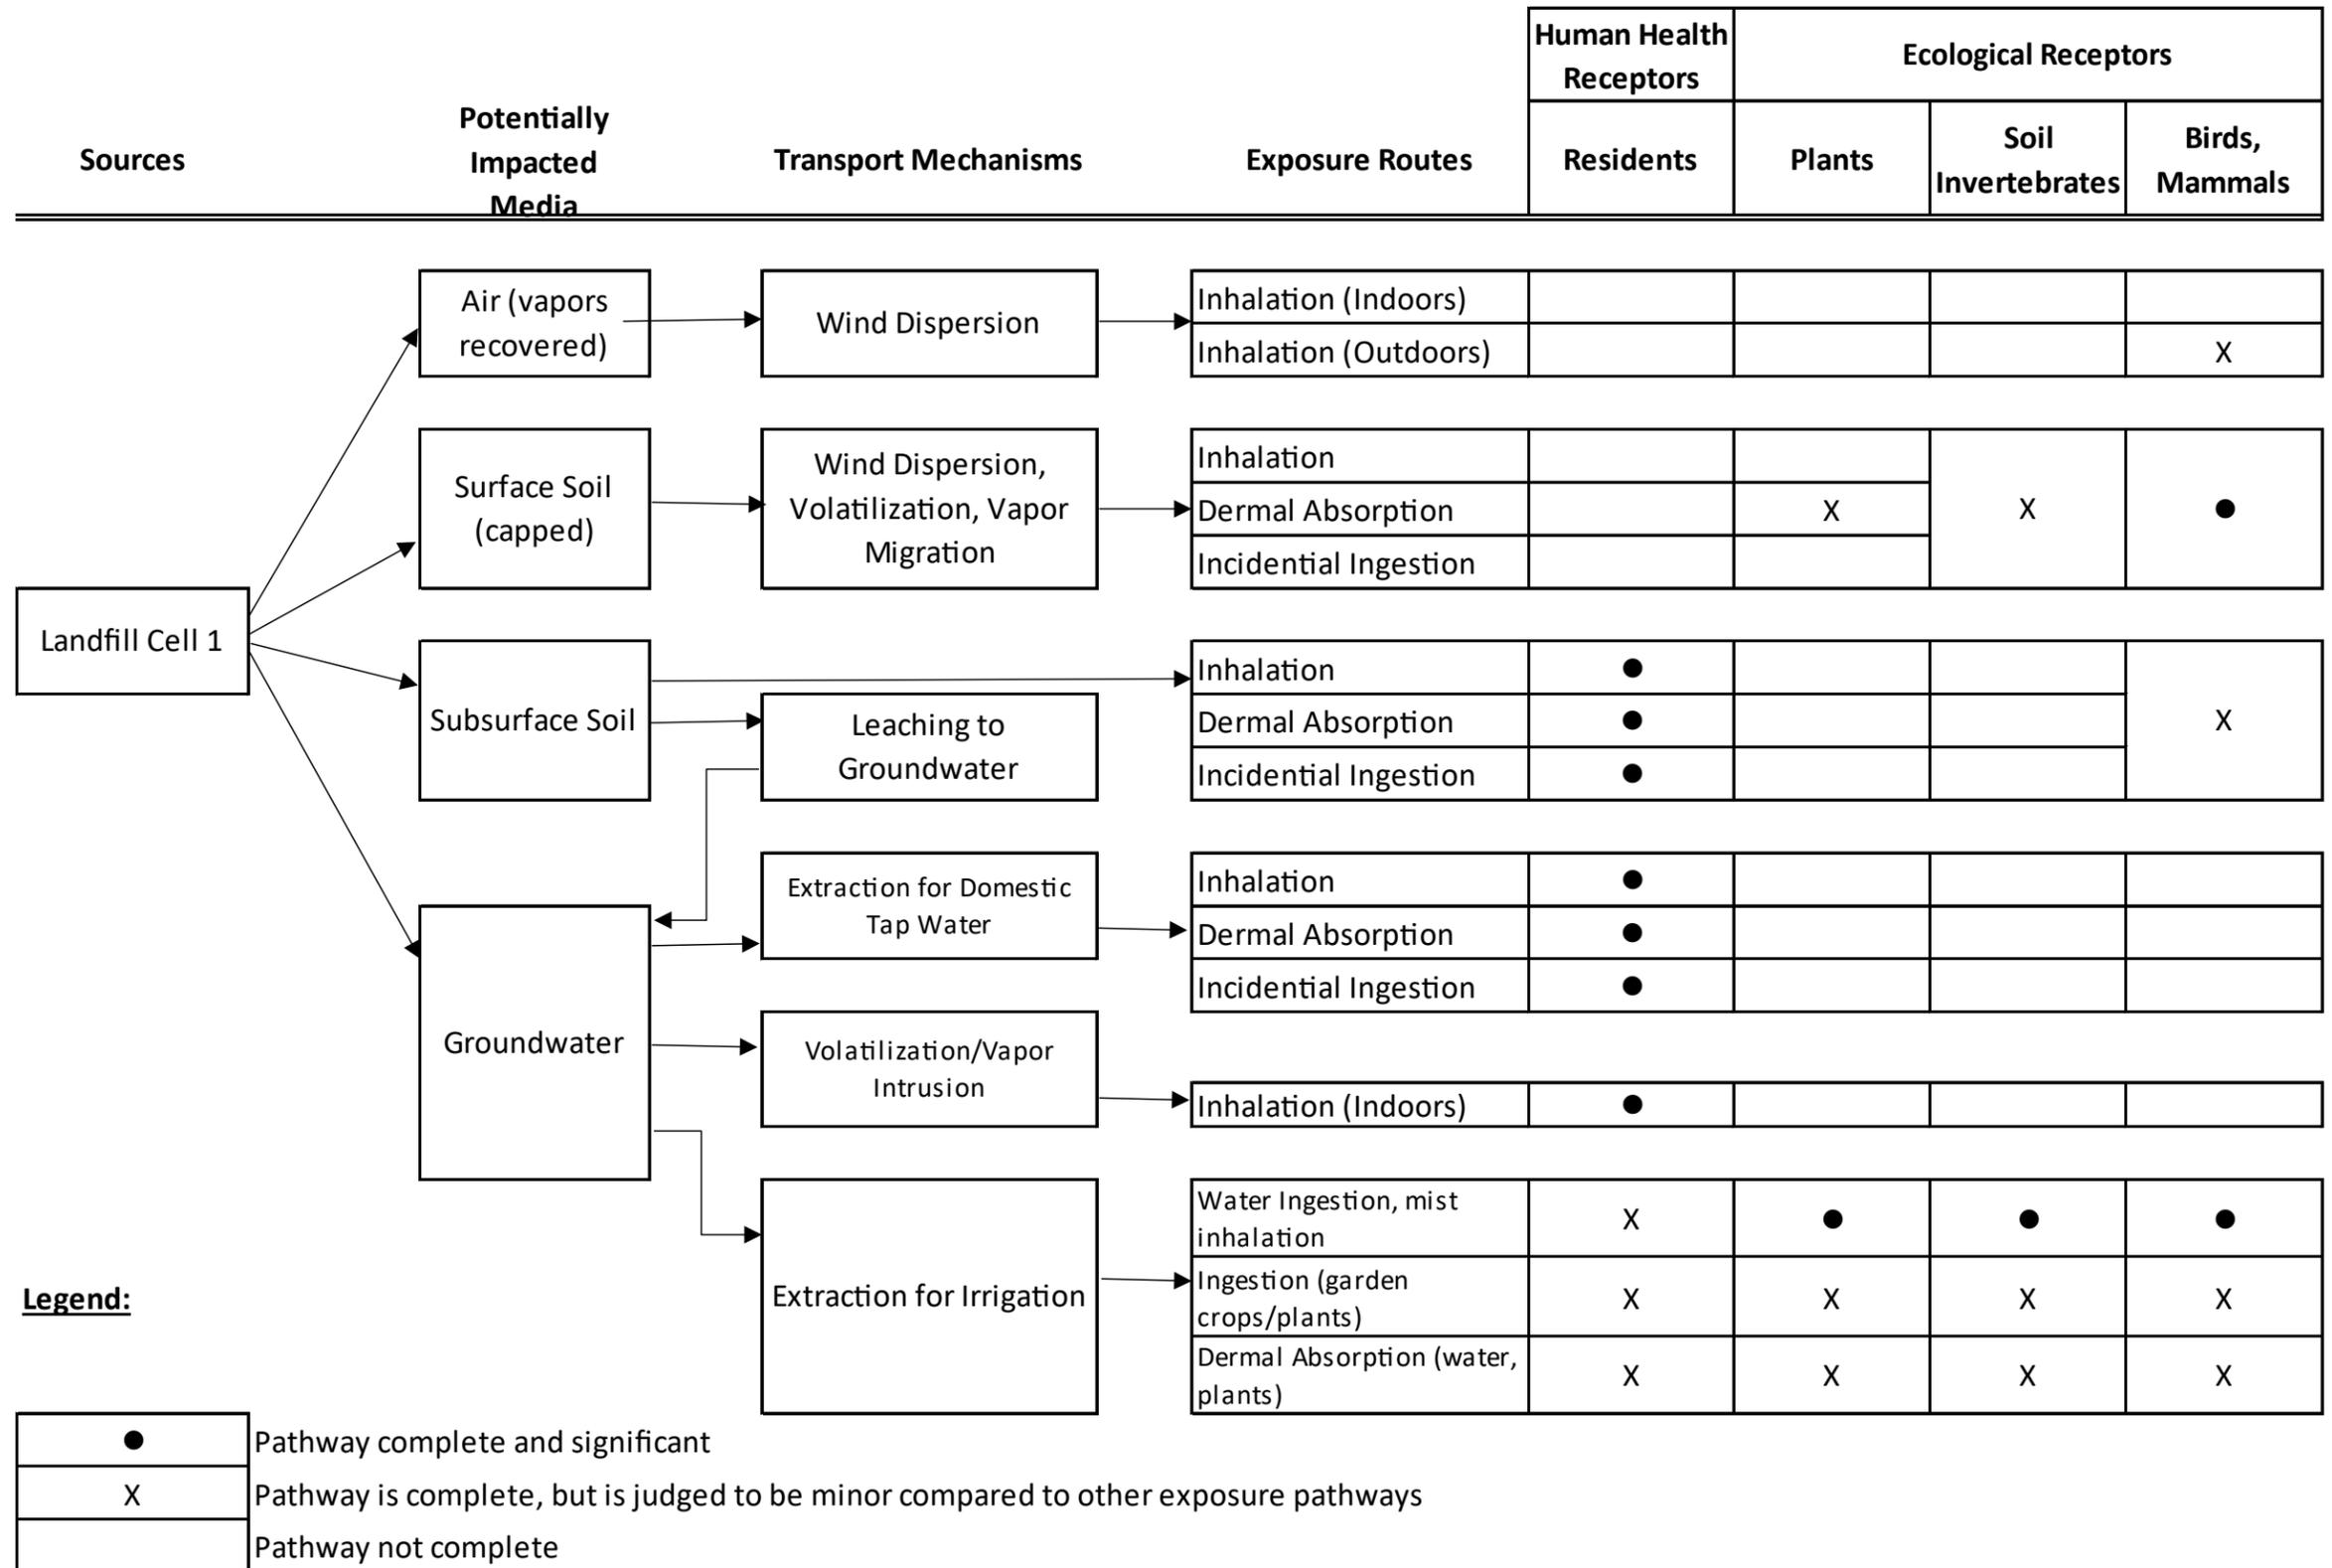

Draft By: K. Scheller Date: 9/6/2024 | Check By: H. Lanza Date: 9/20/24 | Update By: Date: | Backcheck By: Date:

# Tables

---

**Table 2-1  
Offsite Well Completion Details  
Fort Hall Mine Landfill, Bannock County, Idaho**

Location					Construction			
Well Group	Well ID	Easting (x-coordinate)	Northing (y-coordinate)	Elevation (ft msl)	Screen Start (ft bgs)	Screen End (ft bgs)	Well Diameter (inches)	Total Well Depth (ft bgs)
Bannock County Monitoring	MW-116S	601412.65	410222.65	4536	78	93	6	73.5
City of Pocatello Monitoring	MW-37	596895.44	415075.61	4503	57	107	18	119
City of Pocatello Monitoring	MW-38	596694.568	415075.594	4501	60	100	18	135
City of Pocatello Monitoring	MW-38	596694.568	415075.594	4501	105	115	18	135
City of Pocatello Monitoring	MW-38	596694.568	415075.594	4501	121	130	18	135
City of Pocatello Monitoring	PA-1	596644.63	415607.75	4503	128.5	148.5	4	149
City of Pocatello Monitoring	PA-3	596636.44	415606.15	4503	47.5	67.5	4	68
City of Pocatello Monitoring	PA-4	596422.76	415438.08	4519	64.5	74.5	4	145
City of Pocatello Monitoring	PA-4	596422.76	415438.08	4519	99.5	109.5	4	145
City of Pocatello Monitoring	PA-4	596422.76	415438.08	4519	134.5	145.5	4	145
City of Pocatello Monitoring	PA-5	597670.679	414891.598	4498	36	86.5	4	86.5
City of Pocatello Monitoring	PA-7	596917.809	415954.193	4488	171	176.5	4	176.5
City of Pocatello Monitoring	PA-8	596893.984	415920.838	4490	37	47	4	127
City of Pocatello Monitoring	PA-8	596893.984	415920.838	4490	77	87	4	127
City of Pocatello Monitoring	PA-8	596893.984	415920.838	4490	117	127	4	127
City of Pocatello Monitoring	PA-9	598890.52	416316.33	4482	57.5	67.5	4	98
City of Pocatello Monitoring	PA-9	598890.52	416316.33	4482	87.5	98	4	98
City of Pocatello Monitoring	PA-10	599076.35	416149.56	4485	22	62	4	62
City of Pocatello Municipal Supply	Muni-Well-14	589854.12	421658.16	4470	Unknown	Unknown	12	82
City of Pocatello Municipal Supply	Muni-Well-33	593063.94	418259.59	4510	56	115	12	115
Domestic Supply	RW-2076F	603437.23	410006.1	4568	N/A	N/A	6	89
Domestic Supply	RW-2140H	601376.86	410184.78	4557	195	195	8	195
Domestic Supply	RW-2151H	601048.98	410194.52	4571	123	180	8	180
Domestic Supply	RW-2172F	603451.12	410506.72	4545	N/A	N/A	6	110
Domestic Supply	RW-2172H	601343.83	410331.91	4552	100	113	8	165
Domestic Supply	RW-2203H	600946.89	410582.1	4542	Unknown	Unknown	6	Unknown
Domestic Supply	RW-2213F	603003.31	410689.99	4533	Unknown	Unknown	8	Unknown
Domestic Supply	RW-2237H	600946.28	410646.63	4532	Unknown	Unknown	9	100
Domestic Supply	RW-2879M	596669	414104.78	4604	110	110	6	205
Domestic Supply	RW-5898B1	593134.42	418944.16	4487	100	100	10	100
Domestic Supply	RW-7070B	596183.999	415892.248	4523	Unknown	Unknown	8	Unknown
Domestic Supply	RW-7091R	596242.44	416046.04	4505	110	110	6	100
Domestic Supply	RW-7200P	602934.13	410945.27	4512	133	138	6	133
Domestic Supply	RW-7244P	602684.69	411018.74	4513	N/A	N/A	6	80
Domestic Supply	RW-7350P	602268.67	411019.73	4527	Unknown	Unknown	Unknown	Unknown
Domestic Supply	RW-7505P	601500.56	410668.29	4536	Unknown	Unknown	Unknown	Unknown
Domestic Supply	RW-7549P	601215.93	410767.15	4524	Unknown	Unknown	8	Unknown
Domestic Supply	RW-7586P	601324	411058.45	4516	90	110	6	110
Domestic Supply	RW-7588P	601021.8	411873.88	4495	Unknown	Unknown	8	70
Domestic Supply	RW-7677P	600430.68	411242.85	4523	Unknown	Unknown	6	59
Domestic Supply	RW-7688P	600621.78	411461.05	4515	Unknown	Unknown	6	79
Domestic Supply	RW-7773P	599798.81	411863.98	4528	Unknown	Unknown	6	120
Domestic Supply	RW-8000B	596489.98	415079.6	4516	Unknown	Unknown	Unknown	Unknown
Domestic Supply	RW-8012P	598779.95	412267.43	4521	80	90	8	90
Domestic Supply	RW-8030P	598670	412304.15	4521	Unknown	Unknown	8	92
Domestic Supply	RW-8035P	597627.73	411942.38	4569	Unknown	Unknown	8	170
Domestic Supply	RW-8048P	598316.55	412447.026	4523	130	150	6	150
Domestic Supply	RW-8105PS	597583.43	412452.72	4539	80	96	8	Unknown
Domestic Supply	RW-8209P	597141.45	412781.87	4562	140 and 185	150 and 195	8	Unknown
Domestic Supply	RW-8249P	597026.53	412964.39	4575	247	267	6	267
Domestic Supply	RW-8284P	598141.93	412556.97	4524	Unknown	Unknown	Unknown	100

**Notes**

Coordinate system is Idaho State Plane East.  
If the screen start and end are the same, the well is expected to be open hole.

**Abbreviations**

bgs - below ground surface  
ft - feet  
msl - mean sea level

**Table 2-2  
2024 Offsite Groundwater Sampling Information  
Fort Hall Mine Landfill, Bannock County, Idaho**

Location		Sampling - General				Sampling - 2024 Event Records					
Well Group	Well ID	Sample Method (2024)	Sample Schedule (2024)	Target Sample Depth (feet btoc)	Minimum Purge Volume (gal)	Planned for Sampling	Sampled in Summer 2024	Sampling Method	Field Parameters <sup>†</sup>	VOCs Method 8260D	Purge Volume <sup>^</sup> (gal)
City of Pocatello Monitoring	PA-1	Passive	Annual	138.5	NA	Yes	Yes	Passive	X	X	NA
City of Pocatello Monitoring	PA-3	Passive	Annual	58.8	NA	Yes	Yes	Passive	X	X	NA
City of Pocatello Monitoring	PA-4	Passive	Annual	103.8	NA	Yes	Yes	Passive	X	X	NA
City of Pocatello Monitoring	PA-8	Passive	Annual	80.8	NA	Yes	Yes	Passive	X	X	NA
City of Pocatello Municipal Supply	Muni-Well-14	Offsite tap	Biannual	82	NA	Yes	Yes	Offsite tap	X	X	NM
City of Pocatello Municipal Supply	Muni-Well-33	Offsite tap	Biannual	115	NA	Yes	Yes	Offsite tap	X	X	NM
Domestic Supply	RW-2076F	Offsite tap	Annual	89	113	Yes	Yes	Offsite tap	X	X	>113
Domestic Supply	RW-2140H*	Offsite tap	Annual	195	400	Yes	No	Offsite tap	NA	NA	NA
Domestic Supply	RW-2151H	Offsite tap	Annual	180	300	Yes	Yes	Offsite tap	X	X	>300
Domestic Supply	RW-2172H	Offsite tap	Annual	165	300	Yes	Yes	Offsite tap	X	X	>300
Domestic Supply	RW-2203H	Passive	Annual	75	NA	Yes	Yes	Passive	X	X	NA
Domestic Supply	RW-2213F	Offsite tap	Annual	NA	200	Yes	Yes	Offsite tap	X	X	>200
Domestic Supply	RW-2237H	Offsite tap	Annual	100	300	Yes	Yes	Offsite tap	X	X	>300
Domestic Supply	RW-7505P	Offsite tap	Annual	NA	300	Yes	Yes	Offsite tap	X	X	>300
Domestic Supply	RW-7677P	Offsite tap	Annual	59	100	Yes	Yes	Offsite tap	X	X	>100
Domestic Supply	RW-8030P	Offsite tap	Annual	92	200	Yes	Yes	Offsite tap	X	X	>200
Domestic Supply	RW-8048P	Offsite tap	Annual	150	300	Yes	Yes	Offsite tap	X	X	>300
Domestic Supply	RW-8284P	Offsite tap	Annual	100	300	Yes	Yes	Offsite tap	X	X	>300

**Notes**

\*One well was not sampled during the summer 2024 events because access was not granted to the property.

<sup>^</sup>Purge volumes only apply to wells sampled via the offsite tap sampling method.

<sup>†</sup>Field parameters include pH, oxidation-reduction potential, turbidity, dissolved oxygen, specific conductance, and temperature.

**Abbreviations**

> - greater than

feet btoc - feet below top of casing

gal - gallons

NA - not applicable

NM - not measured

VOCs - volatile organic compounds

X - collected

**Table 3 Notes**  
**Fort Hall Mine Landfill, Bannock County, Idaho**

Notes:

Only detected chemicals are shown. Full analytical results are in Appendix C.

**Results greater than the MCL**

Underline indicates values greater than the ID GW Standard

**Bold indicates detected values**

*Italic indicates non-detected values*

**pH values <6.5 or >8.5**

Abbreviations:

EPA = U.S. Environmental Protection Agency

ID GW = Idaho Groundwater Standards

J = Result estimated

MCL = Maximum Contaminant Level

Q = Qualifier

U = Analyte was not detected at the associated value

UJ = The non-detection at the associated value is an estimate

µg/L = micrograms per liter

**Table 3-1  
Municipal Supply Wells VOCs and Field Parameter Results  
Fort Hall Mine Landfill, Bannock County, Idaho**

Analyte	METHOD_ANALYTE_GROUP	EPA MCL	ID GW - PRIMARY	ID GW - SECONDARY	Sample Name	MUNI-WELL-14- 20240619		MUNI-WELL-33- 20240619	
					Well ID	Muni-Well-14		Muni-Well-33	
					Area	Pocatello City		Pocatello City	
					Sample Date	2024-06-19		2024-06-19	
					Unit	Result	Qualifier	Result	Qualifier
1,1,1,2-Tetrachloroethane	Bannock_VOCs	--	--	--	µg/L	0.16	U	0.16	U
1,1,1-Trichloroethane	Bannock_VOCs	200	200	--	µg/L	0.39	U	0.39	U
1,1,2,2-Tetrachloroethane	Bannock_VOCs	--	--	--	µg/L	0.21	U	0.21	U
1,1,2-Trichloroethane	Bannock_VOCs	5	5	--	µg/L	0.27	U	0.27	U
1,1-Dichloroethane	Bannock_VOCs	--	--	--	µg/L	0.22	U	0.22	U
1,1-Dichloroethene	Bannock_VOCs	7	7	--	µg/L	0.23	U	0.23	U
1,1-Dichloropropene	Bannock_VOCs	--	--	--	µg/L	0.19	U	0.19	U
1,2,3-Trichloropropane	Bannock_VOCs	--	--	--	µg/L	0.28	U	0.28	U
1,2,4-Trichlorobenzene	Bannock_VOCs	70	70	--	µg/L	0.58	U	0.58	U
1,2-Dibromo-3-Chloropropane	Bannock_VOCs	0.2	0.2	--	µg/L	0.42	U	0.42	U
1,2-Dibromoethane	Bannock_VOCs	0.05	0.05	--	µg/L	0.18	U	0.18	U
1,2-Dichlorobenzene	Bannock_VOCs	600	600	--	µg/L	0.14	U	0.14	U
1,2-Dichloroethane	Bannock_VOCs	5	5	--	µg/L	0.28	U	0.28	U
1,2-Dichloropropane	Bannock_VOCs	5	5	--	µg/L	0.24	U	0.24	U
1,3-Dichlorobenzene	Bannock_VOCs	--	600	--	µg/L	0.33	U	0.33	U
1,3-Dichloropropane	Bannock_VOCs	--	--	--	µg/L	0.17	U	0.17	U
1,4-Dichlorobenzene	Bannock_VOCs	75	75	--	µg/L	0.39	U	0.39	U
2,2-Dichloropropane	Bannock_VOCs	--	--	--	µg/L	0.17	U	0.17	U
2-Butanone (MEK)	Bannock_VOCs	--	--	--	µg/L	4.6	U	4.6	U
2-Hexanone	Bannock_VOCs	--	--	--	µg/L	0.81	U	0.81	U
4-Methyl-2-pentanone (MIBK)	Bannock_VOCs	--	--	--	µg/L	0.98	U	0.98	U
Acetone	Bannock_VOCs	--	--	--	µg/L	6.6	U	6.6	U
Acetonitrile; methyl cyanide	Bannock_VOCs	--	--	--	µg/L	14	U	14	U
Acrolein	Bannock_VOCs	--	--	--	µg/L	4.9	U	4.9	U
Acrylonitrile	Bannock_VOCs	--	--	--	µg/L	1.7	U	1.7	U
Allyl chloride	Bannock_VOCs	--	--	--	µg/L	0.46	U	0.46	U
Benzene	Bannock_VOCs	5	5	--	µg/L	0.14	U	0.14	U
Bromochloromethane	Bannock_VOCs	--	--	--	µg/L	0.4	U	0.4	U
Bromodichloromethane	Bannock_VOCs	80	100	--	µg/L	0.19	U	0.19	U
Bromoform	Bannock_VOCs	80	100	--	µg/L	1.3	J	0.25	U
Bromomethane	Bannock_VOCs	--	--	--	µg/L	2.4	U	2.4	U
Carbon disulfide	Bannock_VOCs	--	--	--	µg/L	0.26	U	0.26	U
Carbon tetrachloride	Bannock_VOCs	5	5	--	µg/L	0.23	U	0.23	U
Chlorobenzene	Bannock_VOCs	100	100	--	µg/L	0.092	U	0.092	U
Chlorodibromomethane	Bannock_VOCs	80	100	--	µg/L	0.55	J	0.28	U
Chloroethane	Bannock_VOCs	--	--	--	µg/L	0.64	U	0.64	U
Chloroform	Bannock_VOCs	80	2	--	µg/L	0.36	U	0.36	U
Chloromethane	Bannock_VOCs	--	--	--	µg/L	0.23	U	0.23	U
Chloroprene	Bannock_VOCs	--	--	--	µg/L	0.79	U	0.79	U
cis-1,2-Dichloroethene	Bannock_VOCs	70	70	--	µg/L	0.32	U	0.32	U
cis-1,3-Dichloropropene	Bannock_VOCs	--	--	--	µg/L	0.16	U	0.16	U
Dibromomethane	Bannock_VOCs	--	--	--	µg/L	0.34	U	0.34	U
Dichlorodifluoromethane	Bannock_VOCs	--	--	--	µg/L	0.3	U	0.3	U
Ethyl methacrylate	Bannock_VOCs	--	--	--	µg/L	0.19	U	0.19	U
Ethylbenzene	Bannock_VOCs	700	700	--	µg/L	0.14	U	0.14	U
Iodomethane	Bannock_VOCs	--	--	--	µg/L	2.6	U	2.6	U

**Table 3-1  
Municipal Supply Wells VOCs and Field Parameter Results  
Fort Hall Mine Landfill, Bannock County, Idaho**

Analyte	METHOD_ANALYTE_GROUP	EPA MCL	ID GW - PRIMARY	ID GW - SECONDARY	Sample Name	MUNI-WELL-14- 20240619	MUNI-WELL-33- 20240619		
					Well ID	Muni-Well-14	Muni-Well-33		
					Area	Pocatello City	Pocatello City		
					Sample Date	2024-06-19	2024-06-19		
Unit	Result	Qualifier	Result	Qualifier					
Isobutanol; Isobutyl alcohol	Bannock_VOCs	--	--	--	µg/L	37	U	37	U
m,p-Xylene	Bannock_VOCs	10000	--	--	µg/L	0.36	U	0.36	U
Methacrylonitrile	Bannock_VOCs	--	--	--	µg/L	5.3	U	5.3	U
Methyl methacrylate	Bannock_VOCs	--	--	--	µg/L	1.1	U	1.1	U
Methylene Chloride	Bannock_VOCs	5	5	--	µg/L	0.94	U	0.94	U
o-xylene	Bannock_VOCs	10000	--	--	µg/L	0.11	U	0.11	U
Propionitrile; ethyl cyanide	Bannock_VOCs	--	--	--	µg/L	3.7	U	3.7	U
Styrene	Bannock_VOCs	100	100	--	µg/L	0.13	U	0.13	U
Tetrachloroethene	Bannock_VOCs	5	5	--	µg/L	0.4	U	0.4	U
Toluene	Bannock_VOCs	1000	1000	--	µg/L	0.32	U	0.32	U
trans-1,2-Dichloroethene	Bannock_VOCs	100	100	--	µg/L	0.37	U	0.37	U
trans-1,3-Dichloropropene	Bannock_VOCs	--	--	--	µg/L	0.14	U	0.14	U
trans-1,4-Dichloro-2-butene	Bannock_VOCs	--	--	--	µg/L	0.51	U	0.51	U
Trichloroethene	Bannock_VOCs	5	5	--	µg/L	0.93	J	1.9	
Trichlorofluoromethane	Bannock_VOCs	--	--	--	µg/L	0.2	U	0.2	U
Vinyl acetate	Bannock_VOCs	--	--	--	µg/L	0.36	U	0.36	U
Vinyl chloride	Bannock_VOCs	2	2	--	µg/L	0.23	U	0.23	U
Xylenes, total	Bannock_VOCs	10000	10000	--	µg/L	0.11	U	0.11	U
<b>Field Parameters</b>									
Dissolved Oxygen	Bannock_Field_Redox_Params	--	--	--	mg/L	10.96		10.35	
Oxidation-Reduction Potential	Bannock_Field_Redox_Params	--	--	--	mV	185		164.7	
pH	Bannock_Field_Redox_Params	--	--	6.5 - 8.5	su	7.31		7.34	
Specific Conductance	Bannock_Field_Redox_Params	--	--	--	µS/cm	789		784	
Temperature	Bannock_Field_Redox_Params	--	--	--	Celsius	14.27		11.21	
Turbidity	Bannock_Field_Redox_Params	--	--	--	ntu	664		1.72	

Table 3-2  
Domestic Wells VOCs and Field Parameter Results  
Fort Hall Mine Landfill, Bannock County, Idaho

Analyte	EPA MCL	ID GW - PRIMARY	ID GW - SECONDARY	Sample Name	RW-2076F-20240619		RW-2151H-20240618		RW-2172H-20240618		RW-2203H-20240619		RW-2213F-20240618		RW-2237H-20240618		RW-7505P-20240618		RW-7505P-Q-20240618		RW-7677P-20240618		RW-8030P-20240618		RW-8048P-20240618		RW-8284P-20240618	
				Well ID	RW-2076F		RW-2151H		RW-2172H		RW-2203H		RW-2213F		RW-2237H		RW-7505P		RW-7505P		RW-7677P		RW-8030P		RW-8048P		RW-8284P	
				Area	Residential Wells		Residential Wells		Residential Wells		Residential Wells		Residential Wells		Residential Wells													
Sample Date	Unit	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	
																												2024-06-19
1,1,1,2-Tetrachloroethane	--	--	--	µg/L	0.16	U	0.16	U	0.16	U	0.16	U	0.16	U	0.16	U												
1,1,1-Trichloroethane	200	200	--	µg/L	0.39	U	0.39	U	0.39	U	0.39	U	0.39	U	0.39	U												
1,1,2,2-Tetrachloroethane	--	--	--	µg/L	0.21	U	0.21	U	0.21	U	0.21	U	0.21	U	0.21	U												
1,1,2-Trichloroethane	5	5	--	µg/L	0.27	U	0.27	U	0.27	U	0.27	U	0.27	U	0.27	U												
1,1-Dichloroethane	--	--	--	µg/L	0.22	U	0.22	U	0.22	U	0.22	U	0.22	U	0.22	U												
1,1-Dichloroethene	7	7	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U												
1,1-Dichloropropene	--	--	--	µg/L	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U												
1,2,3-Trichloropropane	--	--	--	µg/L	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U												
1,2,4-Trichlorobenzene	70	70	--	µg/L	0.58	U	0.58	U	0.58	U	0.58	U	0.58	U	0.58	U												
1,2-Dibromo-3-Chloropropane	0.2	0.2	--	µg/L	0.42	U	0.42	U	0.42	U	0.42	U	0.42	U	0.42	U												
1,2-Dibromomethane	0.05	0.05	--	µg/L	0.18	U	0.18	U	0.18	U	0.18	U	0.18	U	0.18	U												
1,2-Dichlorobenzene	600	600	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U												
1,2-Dichloroethane	5	5	--	µg/L	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U												
1,2-Dichloropropane	5	5	--	µg/L	0.24	U	0.24	U	0.24	U	0.24	U	0.24	U	0.24	U												
1,3-Dichlorobenzene	--	600	--	µg/L	0.33	U	0.33	U	0.33	U	0.33	U	0.33	U	0.33	U												
1,3-Dichloropropane	--	--	--	µg/L	0.17	U	0.17	U	0.17	U	0.17	U	0.17	U	0.17	U												
1,4-Dichlorobenzene	75	75	--	µg/L	0.39	U	0.39	U	0.39	U	0.39	U	0.39	U	0.39	U												
2,2-Dichloropropane	--	--	--	µg/L	0.17	U	0.17	U	0.17	U	0.17	U	0.17	U	0.17	U												
2-Butanone (MEK)	--	--	--	µg/L	4.6	U	4.6	U	4.6	U	4.6	U	4.6	U	4.6	U												
2-Hexanone	--	--	--	µg/L	0.81	U	0.81	U	0.81	U	0.81	U	0.81	U	0.81	U												
4-Methyl-2-pentanone (MIBK)	--	--	--	µg/L	0.98	U	0.98	U	0.98	U	0.98	U	0.98	U	0.98	U												
Acetone	--	--	--	µg/L	6.6	U	6.6	U	6.6	U	6.6	U	6.6	U	6.6	U												
Acetonitrile; methyl cyanide	--	--	--	µg/L	14	U	14	U	14	U	14	U	14	U	14	U												
Acrolein	--	--	--	µg/L	4.9	U	4.9	U	4.9	U	4.9	U	4.9	U	4.9	U												
Acrylonitrile	--	--	--	µg/L	1.7	U	1.7	U	1.7	U	1.7	U	1.7	U	1.7	U												
Allyl chloride	--	--	--	µg/L	0.46	U	0.46	U	0.46	U	0.46	U	0.46	U	0.46	U												
Benzene	5	5	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U												
Bromochloromethane	--	--	--	µg/L	0.4	U	0.4	U	0.4	U	0.4	U	0.4	U	0.4	U												
Bromodichloromethane	80	100	--	µg/L	3	J	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U										
Bromoform	80	100	--	µg/L	2.3	J	0.25	U	0.25	U	0.25	U	0.25	U	0.25	U	0.25	U										
Bromomethane	--	--	--	µg/L	2.4	U	2.4	U	2.4	U	2.4	U	2.4	U	2.4	U												
Carbon disulfide	--	--	--	µg/L	0.26	U	0.26	U	0.26	U	0.26	U	0.26	U	0.26	U												
Carbon tetrachloride	5	5	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U												
Chlorobenzene	100	100	--	µg/L	0.092	U	0.092	U	0.092	U	0.092	U	0.092	U	0.092	U												
Chlorodibromomethane	80	100	--	µg/L	4.6	J	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U										
Chloroethane	--	--	--	µg/L	0.64	U	0.64	U	0.64	U	0.64	U	0.64	U	0.64	U												
Chloroform	80	2	--	µg/L	1	J	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U										
Chloromethane	--	--	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U												
Chloroprene	--	--	--	µg/L	0.79	U	0.79	U	0.79	U	0.79	U	0.79	U	0.79	U												
cis-1,2-Dichloroethene	70	70	--	µg/L	0.32	U	2.2	J	1.2	J	1.8	J	0.32	U	0.7	J	0.32	U	0.32	U	0.32	U	0.32	J	0.46	J	0.32	U
cis-1,3-Dichloropropene	--	--	--	µg/L	0.16	U	0.16	U	0.16	U	0.16	U	0.16	U	0.16	U												
Dibromomethane	--	--	--	µg/L	0.34	U	0.34	U	0.34	U	0.34	U	0.34	U	0.34	U												
Dichlorodifluoromethane	--	--	--	µg/L	0.3	U	0.3	U	0.3	U	0.3	U	0.3	U	0.3	U												
Ethyl methacrylate	--	--	--	µg/L	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U												
Ethylbenzene	700	700	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U												
Iodomethane	--	--	--	µg/L	2.6	U	2.6	U	2.6	U	2.6	U	2.6	U	2.6	U												
Isobutanol; Isobutyl alcohol	--	--	--	µg/L	37	U	37	U	37	U	37	U	37	U	37	U												
m,p-Xylene	10000	--	--	µg/L	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U												
Methacrylonitrile	--	--	--	µg/L	5.3	U	5.3	U	5.3	U	5.3	U	5.3	U	5.3	U												
Methyl methacrylate	--	--	--	µg/L	1.1	U	1.1	U	1.1	U	1.1	U	1.1	U	1.1	U												
Methylene Chloride	5	5	--	µg/L	0.94	U	0.94	U	0.																			

**Table 3-3  
Pocatello City Monitoring Wells VOCs and Field Parameters  
Fort Hall Mine Landfill, Bannock County, Idaho**

Analyte	EPA MCL	ID GW - PRIMARY	ID GW - SECONDARY	Sample Name	PA-1-20240725		PA-3-20240725		PA-4-100-110-20240725		PA-8-77-87-20240725		PA-8-77-87-Q-20240725	
				Well ID	PA-1		PA-3		PA-4		PA-8		PA-8	
				Area	Pocatello City		Pocatello City		Pocatello City		Pocatello City		Pocatello City	
				Sample Date	7/25/2024		7/25/2024		7/25/2024		7/25/2024		7/25/2024	
				Unit	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier	Result	Qualifier
1,1,1,2-Tetrachloroethane	--	--	--	µg/L	0.16	U	0.16	U	0.16	U	0.16	U	0.16	U
1,1,1-Trichloroethane	200	200	--	µg/L	0.39	U	0.39	U	0.39	U	0.39	U	0.39	U
1,1,2,2-Tetrachloroethane	--	--	--	µg/L	0.21	U	0.21	U	0.21	U	0.21	U	0.21	U
1,1,2-Trichloroethane	5	5	--	µg/L	0.27	U	0.27	U	0.27	U	0.27	U	0.27	U
1,1-Dichloroethane	--	--	--	µg/L	0.22	U	0.22	U	0.22	U	0.22	U	0.22	U
1,1-Dichloroethene	7	7	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U
1,1-Dichloropropene	--	--	--	µg/L	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U
1,2,3-Trichloropropane	--	--	--	µg/L	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U
1,2,4-Trichlorobenzene	70	70	--	µg/L	0.58	U	0.58	U	0.58	U	0.58	U	0.58	U
1,2-Dibromo-3-Chloropropane	0.2	0.2	--	µg/L	0.42	U	0.42	U	0.42	U	0.42	U	0.42	U
1,2-Dibromoethane	0.05	0.05	--	µg/L	0.18	U	0.18	U	0.18	U	0.18	U	0.18	U
1,2-Dichlorobenzene	600	600	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U
1,2-Dichloroethane	5	5	--	µg/L	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U
1,2-Dichloropropane	5	5	--	µg/L	0.24	U	0.24	U	0.24	U	0.24	U	0.24	U
1,3-Dichlorobenzene	--	600	--	µg/L	0.33	U	0.33	U	0.33	U	0.33	U	0.33	U
1,3-Dichloropropane	--	--	--	µg/L	0.17	U	0.17	U	0.17	U	0.17	U	0.17	U
1,4-Dichlorobenzene	75	75	--	µg/L	0.39	U	0.39	U	0.39	U	0.39	U	0.39	U
2,2-Dichloropropane	--	--	--	µg/L	0.17	U	0.17	U	0.17	U	0.17	U	0.17	U
2-Butanone (MEK)	--	--	--	µg/L	4.6	U	4.6	U	4.6	U	4.6	U	4.6	U
2-Hexanone	--	--	--	µg/L	0.81	U	0.81	U	0.81	U	0.81	U	0.81	U
4-Methyl-2-pentanone (MIBK)	--	--	--	µg/L	0.98	U	0.98	U	0.98	U	0.98	U	0.98	U
Acetone	--	--	--	µg/L	6.6	U	6.6	U	6.6	U	6.6	U	6.6	U
Acetonitrile; methyl cyanide	--	--	--	µg/L	14	U	14	U	14	U	14	U	14	U
Acrolein	--	--	--	µg/L	4.9	U	4.9	U	4.9	U	4.9	U	4.9	U
Acrylonitrile	--	--	--	µg/L	1.7	U	1.7	U	1.7	U	1.7	U	1.7	U
Allyl chloride	--	--	--	µg/L	0.46	U	0.46	U	0.46	U	0.46	U	0.46	U
Benzene	5	5	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U
Bromochloromethane	--	--	--	µg/L	0.4	U	0.4	U	0.4	U	0.4	U	0.4	U
Bromodichloromethane	80	100	--	µg/L	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U
Bromoform	80	100	--	µg/L	0.25	U	0.25	U	0.25	U	0.25	U	0.25	U
Bromomethane	--	--	--	µg/L	2.4	U	2.4	U	2.4	U	2.4	U	2.4	U
Carbon disulfide	--	--	--	µg/L	0.26	U	0.26	U	0.26	U	0.26	U	0.26	U
Carbon tetrachloride	5	5	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U
Chlorobenzene	100	100	--	µg/L	0.092	U	0.092	U	0.092	U	0.092	U	0.092	U
Chlorodibromomethane	80	100	--	µg/L	0.28	U	0.28	U	0.28	U	0.28	U	0.28	U
Chloroethane	--	--	--	µg/L	0.64	U	0.64	U	0.64	U	0.64	U	0.64	U
Chloroform	80	2	--	µg/L	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U
Chloromethane	--	--	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U
Chloroprene	--	--	--	µg/L	0.79	U	0.79	U	0.79	U	0.79	U	0.79	U
cis-1,2-Dichloroethene	70	70	--	µg/L	0.32	U	0.32	U	0.32	U	0.32	U	0.32	U
cis-1,3-Dichloropropene	--	--	--	µg/L	0.16	U	0.16	U	0.16	U	0.16	U	0.16	U
Dibromomethane	--	--	--	µg/L	0.34	U	0.34	U	0.34	U	0.34	U	0.34	U
Dichlorodifluoromethane	--	--	--	µg/L	0.3	U	0.3	U	0.3	U	0.3	U	0.3	U
Ethyl methacrylate	--	--	--	µg/L	0.19	U	0.19	U	0.19	U	0.19	U	0.19	U
Ethylbenzene	700	700	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U
Iodomethane	--	--	--	µg/L	2.6	U	2.6	U	2.6	U	2.6	U	2.6	U
Isobutanol; Isobutyl alcohol	--	--	--	µg/L	37	U	37	U	37	U	37	U	37	U
m,p-Xylene	10000	--	--	µg/L	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U
Methacrylonitrile	--	--	--	µg/L	5.3	U	5.3	U	5.3	U	5.3	U	5.3	U
Methyl methacrylate	--	--	--	µg/L	1.1	U	1.1	U	1.1	U	1.1	U	1.1	U
Methylene Chloride	5	5	--	µg/L	0.94	U	0.94	U	0.94	U	0.94	U	0.94	U
o-xylene	10000	--	--	µg/L	0.11	U	0.11	U	0.11	U	0.11	U	0.11	U
Propionitrile; ethyl cyanide	--	--	--	µg/L	3.7	U	3.7	U	3.7	U	3.7	U	3.7	U
Styrene	100	100	--	µg/L	0.13	U	0.13	U	0.13	U	0.13	U	0.13	U
Tetrachloroethene	5	5	--	µg/L	0.4	U	0.4	U	0.4	U	0.4	U	0.4	U
Toluene	1000	1000	--	µg/L	0.32	U	0.32	U	0.32	U	0.32	U	0.32	U
trans-1,2-Dichloroethene	100	100	--	µg/L	0.37	U	0.37	U	0.37	U	0.37	U	0.37	U
trans-1,3-Dichloropropene	--	--	--	µg/L	0.14	U	0.14	U	0.14	U	0.14	U	0.14	U
trans-1,4-Dichloro-2-butene	--	--	--	µg/L	0.51	U	0.51	U	0.51	U	0.51	U	0.51	U
Trichloroethene	5	5	--	µg/L	1.1		1.6		1.7		0.3	U	0.3	U
Trichlorofluoromethane	--	--	--	µg/L	0.2	U	0.2	U	0.2	U	0.2	U	0.2	U
Vinyl acetate	--	--	--	µg/L	0.36	U	0.36	U	0.36	U	0.36	U	0.36	U
Vinyl chloride	2	2	--	µg/L	0.23	U	0.23	U	0.23	U	0.23	U	0.23	U
Xylenes, total	10000	10000	--	µg/L	0.11	U	0.11	U	0.11	U	0.11	U	0.11	U
<b>Field Parameters</b>														
Dissolved Oxygen	--	--	--	mg/L	9.8		7.92		7.33		8.81		--	
Oxidation-Reduction Potential	--	--	--	mV	143.5		148.2		162.4		141.8		--	
pH	--	--	6.5 to 8.5	su	7.5		7.34		7.26		7.96		--	
Specific Conductance	--	--	--	µS/cm	693		728		771		468		--	
Temperature	--	--	--	Celsius	17.6		25.9		21.4		20.4		--	
Turbidity	--	--	--	ntu	8.52		75.81		20.98		420		--	

**Table 4-1  
City Supply Wells Statistical Results  
Fort Hall Mine Landfill, Bannock County, Idaho**

General									Trend analysis								
Well ID	CHEMICAL_NAME	Unit	Min Date	Max Date	Latest Result	Last Q	Dataset n	ND %	TS Slope	TS Intercept	p-value	Confidence Level %	S	sd(S)	Z	GSI COV	GSI Toolkit Trend
Muni-Well-14	Tetrachloroethene	µg/L	10/18/1993	06/19/2024	0.4	U	11	72.7	NC	NC	NC	NC	NC	NC	NC	0.401	NC
Muni-Well-33	Tetrachloroethene	µg/L	03/25/1993	06/19/2024	0.4	U	20	40	-0.0000338	0.993	0.000211	100	-107	30.1	-3.53	0.512	Decreasing
Muni-Well-14	Trichloroethene	µg/L	03/24/1993	06/19/2024	0.93	J	16	0	-0.000401	8.64	0.000297	100	-77	22.1	-3.43	0.741	Decreasing
Muni-Well-33	Trichloroethene	µg/L	03/25/1993	06/19/2024	1.9		21	0	-0.000632	13.8	0.0002	100	-118	33	-3.54	0.802	Decreasing

**Acronyms and Abbreviations**

- % - percent
- GSI COV - Covariance (Standard deviation / mean) of (up to) the last 40 observations
- GSI Toolkit Trend - The trend as per the GSI Toolkit
- J - estimated result
- MDL - method detection limit
- n - dataset result count
- NC - not calculated
- ND - dataset nondetect count
- p-value - probability that S would occur without a statistically significant trend
- Q - qualifier
- S - Mann Kendall S statistic, the number that represents all samples and direction of trend in the Mann-Kendall analysis
- sd(S) - Standard deviation of S (computed using equations 10-14 and 10-15 on page 276 of the ProUCL technical guide v5.20)
- TS - Theil Sen
- U - nondetect result (value equals MDL)
- Z - The standardised S statistic (computed using equations 10-16 on page 276 of the ProUCL technical guide v5.20)
- µg/L - micrograms per liter

**Table 4-2  
City Monitoring Wells Statistical Results  
Fort Hall Mine Landfill, Bannock County, Idaho**

General									Trend analysis								
Well ID	CHEMICAL_NAME	Unit	Min Date	Max Date	Latest Result	Last Q	Dataset n	ND %	TS Slope	TS Intercept	p-value	Confidence Level %	S	sd(S)	Z	GSI COV	GSI Toolkit Trend
PA-1-128.5-148.5	Tetrachloroethene	µg/L	04/25/1994	07/25/2024	0.4	U	10	60	NC	NC	NC	NC	NC	NC	NC	0.815	NC
PA-3-47.5-67.5	Tetrachloroethene	µg/L	04/25/1994	07/25/2024	0.4	U	10	50	-0.0000509	1.26	0.0152	98.5	-25	11.1	-2.16	0.544	Decreasing
PA-4-99.5-109.5	Tetrachloroethene	µg/L	04/25/1994	07/25/2024	0.4	U	9	33.3	-0.00013	2.95	0.00962	99	-23	9.4	-2.34	0.757	Decreasing
PA-8-77-87	Tetrachloroethene	µg/L	04/25/1994	07/25/2024	0.4	U	8	75	NC	NC	NC	NC	NC	NC	NC	0.556	NC
PA-1-128.5-148.5	Trichloroethene	µg/L	04/25/1994	07/25/2024	1.1		13	0	-0.000754	15.5	0.0000274	100	-67	16.4	-4.03	1.06	Decreasing
PA-3-47.5-67.5	Trichloroethene	µg/L	04/25/1994	07/25/2024	1.6		15	0	-0.000689	14.3	0.000101	100	-76	20.2	-3.72	0.807	Decreasing
PA-4-99.5-109.5	Trichloroethene	µg/L	04/25/1994	07/25/2024	1.7		9	0	-0.00158	32	0.000615	99.9	-32	9.59	-3.23	1.15	Decreasing
PA-8-77-87	Trichloroethene	µg/L	04/25/1994	07/25/2024	0.3	U	9	44.4	-0.000378	7.55	0.00283	99.7	-27	9.4	-2.77	1.4	Decreasing

**Abbreviations**

- % - percent
- GSI COV - Covariance (Standard deviation / mean) of (up to) the last 40 observations
- GSI Toolkit Trend = The trend as per the GSI Toolkit
- MDL - method detection limit
- n - dataset result count
- NC - not calculated
- ND - dataset nondetect count
- p-value - probability that S would occur without a statistically significant trend
- Q - qualifier
- S - Mann Kendall S statistic, the number that represents all samples and direction of trend in the Mann-Kendall analysis
- sd(S) - Standard deviation of S (computed using equations 10-14 and 10-15 on page 276 of the ProUCL technical guide v5.20)
- TS - Theil Sen
- U - nondetect result (value equals MDL)
- Z - The standardised S statistic (computed using equations 10-16 on page 276 of the ProUCL technical guide v5.20)
- µg/L - micrograms per liter

**Table 4-3  
Domestic Wells Statistical Results  
Fort Hall Mine Landfill, Bannock County, Idaho**

General									Trend analysis								
Well ID	CHEMICAL_NAME	Unit	Min Date	Max Date	Latest Result	Last Q	Dataset n	ND %	TS Slope	TS Intercept	p-value	Confidence Level %	S	sd(S)	Z	GSI COV	GSI Toolkit Trend
RW-2076F	Tetrachloroethene	µg/L	08/02/2017	06/19/2024	0.4	UJ	8	50	0	2.5	0.5	50	0	7.96	0	0.948	Stable
RW-2076F	Tetrachloroethene	µg/L	02/25/1993	06/19/2024	0.4	UJ	40	10	-0.00125	23.8	2.34E-06	100	-393	83	-4.72	2.49	Decreasing
RW-2151H	Tetrachloroethene	µg/L	09/28/1992	06/18/2024	3.4		14	14.3	-0.000883	17.8	0.00259	99.7	-52	18.2	-2.79	1.15	Decreasing
RW-2172H	Tetrachloroethene	µg/L	09/28/1992	06/18/2024	3		11	0	-0.00109	24.6	0.00116	99.9	-40	12.8	-3.05	0.725	Decreasing
RW-2203H	Tetrachloroethene	µg/L	09/28/1992	06/19/2024	2.9		12	0	-0.00113	24.7	0.00434	99.6	-39	14.5	-2.62	1.05	Decreasing
RW-2213F	Tetrachloroethene	µg/L	08/02/2017	06/18/2024	0.4	U	6	100	NC	NC	NC	NC	NC	NC	NC	0.299	NC
RW-2237H	Tetrachloroethene	µg/L	09/28/1992	06/18/2024	2.1		9	0	-0.000195	2.26	0.417	58.3	-3	9.54	-0.21	0.794	Stable
RW-7505P	Tetrachloroethene	µg/L	12/15/1993	06/18/2024	0.4	U	8	87.5	NC	NC	NC	NC	NC	NC	NC	0.309	NC
RW-7677P	Tetrachloroethene	µg/L	03/22/1994	06/18/2024	1.4		10	0	0	1.2	0.464	53.6	-2	11	-0.0909	0.881	Stable
RW-8030P	Tetrachloroethene	µg/L	08/01/2017	06/18/2024	1	J	7	14.3	-0.000528	10.9	0.0666	93.3	-11	6.66	-1.5	0.653	Probably Decreasing
RW-8030P	Tetrachloroethene	µg/L	08/20/1992	06/18/2024	1	J	38	2.6	0	1.45	0.47	53	7	76.4	0.0785	0.376	No trend
RW-8048P	Tetrachloroethene	µg/L	06/22/2020	06/18/2024	0.41	J	5	60	NC	NC	NC	NC	NC	NC	NC	0.431	NC
RW-8284P	Tetrachloroethene	µg/L	06/23/2019	06/18/2024	0.64	J	6	33.3	-0.000199	4.39	0.169	83.1	-6	5.22	-0.957	0.368	Stable
RW-2076F	Trichloroethene	µg/L	08/02/2017	06/19/2024	0.3	UJ	8	12.5	-0.00129	37.1	0.268	73.2	-6	8.08	-0.619	1.03	No Trend
RW-2076F	Trichloroethene	µg/L	06/17/1993	06/19/2024	0.3	UJ	40	2.5	-0.00481	104	0.00407	99.6	-228	83.2	-2.73	1.05	Decreasing
RW-2151H	Trichloroethene	µg/L	09/28/1992	06/18/2024	21		14	0	-0.0103	202	0.000609	99.9	-60	18.2	-3.23	1.22	Decreasing
RW-2172H	Trichloroethene	µg/L	09/28/1992	06/18/2024	18		11	0	-0.0113	236	0.000683	99.9	-42	12.8	-3.2	0.976	Decreasing
RW-2203H	Trichloroethene	µg/L	09/28/1992	06/19/2024	21		12	0	-0.00926	197	0.000784	99.9	-47	14.6	-3.16	1.06	Decreasing
RW-2213F	Trichloroethene	µg/L	08/02/2017	06/18/2024	0.3	U	6	100	NC	NC	NC	NC	NC	NC	NC	0.374	NC
RW-2237H	Trichloroethene	µg/L	09/28/1992	06/18/2024	11		9	0	-0.000629	21.4	0.104	89.6	-13	9.54	-1.26	0.712	Stable
RW-7505P	Trichloroethene	µg/L	09/28/1992	06/18/2024	0.3	U	12	41.7	-0.0000112	0.506	0.185	81.5	-14	14.5	-0.895	1.3	No Trend
RW-7677P	Trichloroethene	µg/L	10/23/1992	06/18/2024	5.9		14	0	-0.00102	24.7	0.00764	99.2	-45	18.1	-2.43	0.898	Decreasing
RW-8030P	Trichloroethene	µg/L	08/01/2017	06/18/2024	6.1	J	7	0	-0.00183	40.8	0.184	81.6	-7	6.66	-0.901	0.609	Stable
RW-8030P	Trichloroethene	µg/L	07/11/2001	06/18/2024	6.1	J	40	0	0.000964	-5.21	0.00596	99.4	216	82.9	2.59	0.371	Increasing
RW-8048P	Trichloroethene	µg/L	06/22/2020	06/18/2024	2.9	J	5	0	NC	NC	NC	NC	NC	NC	NC	0.286	NC
RW-8284P	Trichloroethene	µg/L	06/23/2019	06/18/2024	2.8	J	6	0	-0.000755	17.4	0.354	64.6	-3	5.32	-0.376	0.524	Stable

**Notes**

Shading denotes a data set evaluated for a truncated timeframe

**Acronyms and Abbreviations**

- % - percent
- GSI COV - Covariance (Standard deviation / mean) of (up to) the last 40 observations
- GSI Toolkit Trend - The trend as per the GSI Toolkit
- J - estimated result
- MDL - method detection limit
- n - dataset result count
- NC - not calculated
- ND - dataset nondetect count
- p-value - probability that S would occur without a statistically significant trend
- Q - qualifier
- S - Mann Kendall S statistic, the number that represents all samples and direction of trend in the Mann-Kendall analysis
- sd(S) - Standard deviation of S (computed using equations 10-14 and 10-15 on page 276 of the ProUCL technical guide v5.20)
- TS - Theil Sen
- U - nondetect result (value equals MDL)
- Z - The standardised S statistic (computed using equations 10-16 on page 276 of the ProUCL technical guide v5.20)
- µg/L - micrograms per liter

**Table 5-1  
Human Health Chemicals of Potential Concern Selection  
Fort Hall Mine Landfill, Bannock County, Idaho**

Chemical	MCL (µg/L)	2024				
		Number of Samples	Number of Detects	Detection Frequency	Maximum (µg/L)	COPC?
1,1,1,2-Tetrachloroethane	NA	22	0	0%	0.58	N
1,1,1-Trichloroethane	200	22	0	0%	0.39	N
1,1,2,2-Tetrachloroethane	NA	22	0	0%	0.21	N
1,1,2-Trichloroethane	5	22	0	0%	0.27	N
1,1-Dichloroethane	NA	22	0	0%	0.22	N
1,1-Dichloroethene	7	22	0	0%	0.23	N
1,1-Dichloropropene	NA	22	0	0%	0.42	N
1,2,3-Trichloropropane	NA	22	0	0%	0.86	N
1,2,4-Trichlorobenzene	70	22	0	0%	0.58	N
1,2-Dibromo-3-Chloropropane	0.2	22	0	0%	1.8	N
1,2-Dibromoethane	0.05	22	0	0%	0.4	N
1,2-Dichlorobenzene	600	22	0	0%	0.37	N
1,2-Dichloroethane	5	22	0	0%	0.54	N
1,2-Dichloropropene	5	22	0	0%	0.52	N
1,3-Dichlorobenzene	NA	22	0	0%	0.33	N
1,3-Dichloropropane	NA	22	0	0%	0.38	N
1,4-Dichlorobenzene	75	22	0	0%	0.39	N
2,2-Dichloropropane	NA	22	0	0%	0.38	N
2-Butanone (MEK)	NA	22	0	0%	6	N
2-Hexanone	NA	22	0	0%	1.7	N
4-Methyl-2-pentanone (MIBK)	NA	22	0	0%	0.98	N
Acetone	NA	22	0	0%	6.6	N
Acetonitrile; methyl cyanide	NA	22	0	0%	14	N
Acrolein	NA	22	0	0%	4.9	N
Acrylonitrile	NA	22	0	0%	4.5	N
Allyl chloride	NA	22	0	0%	0.46	N
Benzene	5	22	0	0%	0.31	N
Bromochloromethane	NA	22	0	0%	0.4	N
Bromodichloromethane	8.0E+01(G)	22	1	5%	3	N
Bromoform	8.0E+01(G)	22	2	9%	2.3	N
Bromomethane	NA	22	0	0%	2.4	N
Carbon disulfide	NA	22	0	0%	0.63	N
Carbon tetrachloride	5	22	0	0%	0.57	N
Chlorobenzene	100	22	0	0%	0.42	N
Chlorodibromomethane	8.0E+01(G)	22	2	9%	4.6	N
Chloroethane	NA	22	0	0%	1.4	N
Chloroform	8.0E+01(G)	22	1	5%	1	N
Chloromethane	NA	22	0	0%	0.75	N
Chloroprene	NA	22	0	0%	1.2	N
cis-1,2-Dichloroethene	70	22	7	32%	2.2	N
cis-1,3-Dichloropropene	NA	22	0	0%	0.63	N
Dibromomethane	NA	22	0	0%	0.34	N
Dichlorodifluoromethane	NA	22	0	0%	0.96	N
Ethyl methacrylate	NA	22	0	0%	0.86	N
Ethylbenzene	700	22	0	0%	0.3	N
Iodomethane	NA	22	0	0%	2.6	N
Isobutanol; Isobutyl alcohol	NA	22	0	0%	37	N

**Table 5-1  
Human Health Chemicals of Potential Concern Selection  
Fort Hall Mine Landfill, Bannock County, Idaho**

Chemical	MCL (µg/L)	2024				
		Number of Samples	Number of Detects	Detection Frequency	Maximum (µg/L)	COPC?
m,p-Xylene	NA	22	0	0%	0.36	N
Methacrylonitrile	NA	22	0	0%	5.3	N
Methyl methacrylate	NA	22	0	0%	1.1	N
Methylene Chloride	5	22	0	0%	0.94	N
Propionitrile; ethyl cyanide	NA	22	0	0%	3.7	N
Styrene	100	22	0	0%	0.36	N
Tetrachloroethene	5	22	9	41%	3.4	N
Toluene	1000	22	0	0%	0.32	N
trans-1,2-Dichloroethene	100	22	0	0%	0.37	N
trans-1,3-Dichloropropene	NA	22	0	0%	0.65	N
trans-1,4-Dichloro-2-butene	NA	22	0	0%	1.4	N
Trichloroethene	5	22	16	73%	21	Y
Trichlorofluoromethane	NA	22	0	0%	0.57	N
Vinyl acetate	NA	22	0	0%	0.94	N
Vinyl chloride	2	22	0	0%	0.51	N

**Notes**

Nondetects were evaluated at the method detection limit for summary statistic computation.

(G) - The individual trihalomethanes (bromodichloromethane; bromoform; dibromochloromethane, chloroform) all have the MCL of 80 µg/L listed in the RSL table. However, 80 µg/L is the MCL for Total Trihalomethanes.

**Acronyms/Abbreviations**

µg/L - micrograms per liter

COPC - chemical of potential concern

MCL - maximum contaminant level

N - no

NA - not applicable

Y - yes

**Table 5-2  
Human Health Reasonable Maximum Exposure Parameters  
Fort Hall Mine Landfill, Bannock County, Idaho**

Parameter	Units	Adult	Child
Exposure Duration	years	20	6
Exposure Frequency	days	350	350
Air Exposure Time	hours/day	24	24
Drinking Water Ingestion Rate	L/day	2.5	0.78
Water Exposure Time	hours/event	0.71	0.54
Water Exposure Events		1	1
Body Weight	kilograms	80	15
Skin Surface Area	mg/cm <sup>2</sup>	19,652	6,365
Averaging Time	days/year	365	365

**Acronyms/Abbreviations**

cm<sup>2</sup> - squared centimeter

L - liter

mg - milligrams

**Table 5-3  
Human Health Groundwater Non-cancer Hazard Evaluation  
Fort Hall Mine Landfill, Bannock County, Idaho**

Well ID	Groundwater Concentration (µg/L)										
	TCE						PCE				
	2019	2020	2021	2022	2023	2024	2019	2020	2021	2023	2024
MUNI-WELL-14	1.1	1.2	1.2	NA	NA	0.93	0.2	0.25	0.2	NA	0.4
MUNI-WELL-33	1.9	2.1	1.9	NA	NA	1.9	0.31	0.37	0.39	NA	0.4
MW-103S	NA	6.8	14	NA	30	0.43	NA	1.1	2.8	5.2	0.4
MW-103D	NA	NA	NA	NA	NA	0.30	NA	NA	NA	NA	0.4
MW-115S	NA	0.16	0.16	NA	0.45	0.79	NA	0.2	0.2	0.4	0.4
MW-116S	31	26	27	19	14	7.3	3	3.7	4.2	2	1.4
PA-1	1.6	1.6	1.5	NA	0.5	1.1	0.2	0.2	0.2	0.4	0.4
PA-3	1.7	2	1.2	NA	0.8	1.6	0.24	0.2	0.2	0.4	0.4
PA-4	2.3	2.8	NA	1.8	1.1	1.7	0.25	0.63	NA	0.4	0.4
PA-8	0.45	0.32	0.16	0.33	0.3	0.3	0.2	0.2	0.2	0.4	0.4
RW-2076F	NA	NA	29	NA	0.92	0.3	NA	NA	5.3	0.4	0.4
RW-2151H	12	5.8	14	0.79	6	21	1.8	0.2	2.7	0.47	3.4
RW-2172H	42	28	21	16	17	18	7	4.9	5.4	3.2	3.0
RW-2203H	31	33	NA	18	13	21	4.6	5.2	NA	1.3	2.9
RW-2213F	0.16	0.16	NA	NA	0.3	0.3	0.2	0.2	NA	0.4	0.4
RW-2237H	NA	9.8	8.6	5.3	25	11	NA	1.9	1.2	4	2.1
RW-7505P	0.29	0.16	0.16	0.35	0.3	0.3	0.2	0.2	0.2	0.4	0.4
RW-7677P	6.3	5.9	5.3	3.4	7	5.9	1.2	1.2	1.1	1.2	1.4
RW-8030P	6	7.1	4.6	4	4.9	6.1	0.94	1.3	0.8	0.4	1
RW-8048P	NA	4	3.8	1.8	3.9	2.9	NA	0.71	0.2	0.4	0.41
RW-8284P	3.4	3.9	4.9	0.84	1.5	2.8	0.89	0.93	0.54	0.4	0.64

**Acronyms/Abbreviations**

- µg/L - micrograms per liter
- HQ - hazard quotient
- ID - identifier
- NA - not available
- PCE - tetrachloroethene
- RSL - Regional Screening Level
- TCE - trichloroethene
- VI - vapor intrusion

**Notes**

Shading indicates HQ values greater than 1.

**Table 5-3  
Human Health Groundwater Non-cancer Hazard Evaluation  
Fort Hall Mine Landfill, Bannock County, Idaho**

Well ID	Groundwater HQ										
	TCE						PCE				
	2019	2020	2021	2022	2023	2024	2019	2020	2021	2023	2024
MUNI-WELL-14	0.4	0.4	0.4	NA	NA	0.3	0.005	0.006	0.005	NA	0.01
MUNI-WELL-33	0.7	0.8	0.7	NA	NA	0.7	0.008	0.009	0.010	NA	0.01
MW-103S	NA	2	5	NA	11	0.2	NA	0.03	0.07	0.1	0.01
MW-103D	NA	NA	NA	NA	NA	0.1	NA	NA	NA	NA	0.01
MW-115S	NA	0.1	0.1	NA	0.2	0.3	NA	0.005	0.005	0.01	0.01
MW-116S	11	9	10	7	5	3	0.07	0.09	0.1	0.05	0.03
PA-1	0.6	0.6	0.5	NA	0.2	0.4	0.005	0.005	0.005	0.01	0.01
PA-3	0.6	0.7	0.4	NA	0.3	0.6	0.006	0.005	0.005	0.01	0.01
PA-4	0.8	1.0	NA	0.6	0.4	0.6	0.006	0.02	NA	0.01	0.01
PA-8	0.2	0.1	0.1	0.1	0.1	0.1	0.005	0.005	0.005	0.01	0.01
RW-2076F	NA	NA	10	NA	0.3	0.1	NA	NA	0.1	0.01	0.01
RW-2151H	4	2	5	0.3	2	8	0.04	0.005	0.07	0.01	0.08
RW-2172H	15	10	8	6	6	6	0.2	0.1	0.1	0.08	0.07
RW-2203H	11	12	NA	6	5	8	0.1	0.1	NA	0.03	0.07
RW-2213F	0.06	0.1	NA	NA	0.1	0.1	0.005	0.005	NA	0.01	0.01
RW-2237H	NA	4	3	2	9	4	NA	0.05	0.03	0.1	0.05
RW-7505P	0.1	0.1	0.1	0.1	0.1	0.1	0.005	0.005	0.005	0.01	0.01
RW-7677P	2	2	2	1	3	2	0.029	0.03	0.03	0.03	0.03
RW-8030P	2	3	2	1	2	2	0.02	0.03	0.02	0.01	0.02
RW-8048P	NA	1	1	0.6	1	1	NA	0.02	0.005	0.01	0.01
RW-8284P	1	1	2	0.3	1	1	0.02	0.02	0.01	0.01	0.02

**Acronyms/Abbreviations**

µg/L - micrograms per liter  
 HQ - hazard quotient  
 ID - identifier  
 NA - not available  
 PCE - tetrachloroethene  
 RSL - Regional Screening Level  
 TCE - trichloroethene  
 VI - vapor intrusion

**Notes**

Shading indicates HQ values greater than 1.

**Table 5-4  
Human Health Vapor Intrusion Non-cancer Hazard Evaluation  
Fort Hall Mine Landfill, Bannock County, Idaho**

Well ID	2024			
	TCE Groundwater Concentration (µg/L)	Calculated Indoor Air TCE Concentration (µg/m <sup>3</sup> )	VI TCE Carcinogenic Risk	VI TCE HQ
MUNI-WELL-14	0.93	0.11	2E-07	5E-02
MUNI-WELL-33	1.9	0.23	5E-07	1E-01
MW-103S	0.43	0.05	1E-07	2E-02
MW-103D	0.3	0.036	7E-08	2E-02
MW-115S	0.79	0.09	2E-06	5E-02
MW-116S	7.3	0.87	2E-06	4E-01
PA-1	1.1	0.13	3E-07	6E-02
PA-3	1.6	0.19	4E-07	9E-02
PA-4	1.7	0.20	4E-07	1E-01
PA-8	0.3	0.036	7E-08	2E-02
RW-2076F	0.3	0.036	7E-08	2E-02
RW-2151H	21	2.50	5E-06	1E+00
RW-2172H	18	2.14	4E-06	1E+00
RW-2203H	21	2.50	5E-06	1E+00
RW-2213F	0.3	0.036	7E-08	2E-02
RW-2237H	11	1.31	3E-06	6E-01
RW-7505P	0.3	0.036	7E-08	2E-02
RW-7677P	5.9	0.73	1E-06	3E-01
RW-8030P	6.1	0.73	2E-06	3E-01
RW-8048P	2.9	0.35	7E-07	2E-01
RW-8284P	2.8	0.33	7E-07	2E-01

Groundwater temperature was set to 13.5 (°C) in the VISL calculator.

µg/L - micrograms per liter

µg/m<sup>3</sup> - micrograms per cubic meter

HQ - hazard quotient

ID - identifier

NA - not available

TCE - trichloroethene

VI - vapor intrusion

VISL - vapor intrusion screening level

**Table 5-5**  
**Human Health Total Non-cancer Hazard Quotients - 2024**  
**Fort Hall Mine Landfill, Bannock County, Idaho**

Well ID	Groundwater HQ	VI HQ	Total HI
MUNI-WELL-14	3E-01	5E-02	4E-01
MUNI-WELL-33	7E-01	1E-01	8E-01
MW-103S	2E-01	2E-02	2E-01
MW-103D	1E-01	2E-02	1E-01
MW-115S	3E-01	5E-02	3E-01
MW-116S	3E+00	4E-01	3E+00
PA-1	4E-01	6E-02	5E-01
PA-3	6E-01	9E-02	7E-01
PA-4	6E-01	1E-01	7E-01
PA-8	1E-01	2E-02	1E-01
RW-2076F	1E-01	2E-02	1E-01
RW-2151H	8E+00	1E+00	9E+00
RW-2172H	6E+00	1E+00	7E+00
RW-2203H	8E+00	1E+00	9E+00
RW-2213F	1E-01	2E-02	1E-01
RW-2237H	4E+00	6E-01	5E+00
RW-7505P	1E-01	2E-02	1E-01
RW-7677P	2E+00	3E-01	2E+00
RW-8030P	2E+00	3E-01	3E+00
RW-8048P	1E+00	2E-01	1E+00
RW-8284P	1E+00	2E-01	1E+00

**Table 5-6  
Ecological Chemicals of Potential Concern Selection  
Fort Hall Mine Landfill, Bannock County, Idaho**

Chemical	CAS	Screening Value (µg/L)	Old Screening Value (µg/L)	2019								
				Number of Samples	Number of Detects	Detection Frequency	Minimum (µg/L)	Average (µg/L)	Maximum (µg/L)	MCL (µg/L)	Screening Value (µg/L)	COPC?
1,1,1,2-Tetrachloroethane	630-20-6	NA	NA	60	NA	0%	0.21	0.21	0.21	NA	NA	N
1,1,1-Trichloroethane	71-55-6	4400000	4400000	60	2	3%	0.16	0.163667	0.27	200	4400000	N
1,1,2,2-Tetrachloroethane	79-34-5	NA	NA	60	NA	0%	0.21	0.21	0.21	NA	NA	N
1,1,2-Trichloroethane	79-00-5	NA	NA	60	NA	0%	0.27	0.27	0.27	5	NA	N
1,1-Dichloroethane	75-34-3	1700000	1700000	60	2	3%	0.22	0.221	0.26	NA	1700000	N
1,1-Dichloroethene	75-35-4	130000	130000	60	NA	0%	0.23	0.23	0.23	7	130000	N
1,1-Dichloropropene	563-58-6	NA	NA	60	NA	0%	0.19	0.19	0.19	NA	NA	N
1,2,3-Trichloropropane	96-18-4	NA	NA	60	NA	0%	0.33	0.33	0.33	NA	NA	N
1,2,4-Trichlorobenzene	120-82-1	6600	6600	60	NA	0%	0.21	0.21	0.21	70	6600	N
1,2-Dibromo-3-Chloropropane	96-12-8	NA	NA	60	NA	0%	0.47	0.47	0.47	0.2	NA	N
1,2-Dibromoethane	106-93-4	NA	NA	60	NA	0%	0.18	0.18	0.18	0.05	NA	N
1,2-Dichlorobenzene	95-50-1	NA	NA	60	NA	0%	0.15	0.15	0.15	600	NA	N
1,2-Dichloroethane	107-06-2	19000	19000	60	3	5%	0.13	0.2085	2	5	19000	N
1,2-Dichloropropane	78-87-5	NA	NA	60	1	2%	0.18	0.181833	0.29	5	NA	N
1,3-Dichlorobenzene	541-73-1	NA	NA	60	NA	0%	0.13	0.13	0.13	NA	NA	N
1,3-Dichloropropane	142-28-9	NA	NA	60	NA	0%	0.09	0.09	0.09	NA	NA	N
1,4-Dichlorobenzene	106-46-7	11000	11000	60	NA	0%	0.16	0.16	0.16	75	11000	N
2,2-Dichloropropane	594-20-7	NA	NA	60	NA	0%	0.38	0.38	0.38	NA	NA	N
2-Butanone (MEK)	78-93-3	7900000	7900000	60	NA	0%	2	2	2	NA	7900000	N
2-Hexanone	591-78-6	NA	NA	60	NA	0%	1.7	1.7	1.7	NA	NA	N
4-Methyl-2-pentanone (MIBK)	108-10-1	NA	NA	60	NA	0%	0.98	0.98	0.98	NA	NA	N
Acetone	67-64-1	44000	44000	60	1	2%	1.9	2.12	10	NA	44000	N
Acetonitrile; methyl cyanide	75-05-8	NA	NA	60	NA	0%	9.6	9.6	9.6	NA	NA	N
Acrolein	107-02-8	NA	NA	60	NA	0%	2.8	2.8	2.8	NA	NA	N
Acrylonitrile	107-13-1	NA	NA	60	NA	0%	1.4	1.4	1.4	NA	NA	N
Allyl chloride	107-05-1	NA	NA	60	1	2%	0.17	0.179667	0.75	NA	NA	N
Benzene	71-43-2	110000	110000	60	NA	0%	0.16	0.16	0.16	5	110000	N
Bromochloromethane	74-97-5	NA	NA	60	NA	0%	0.1	0.1	0.1	NA	NA	N
Bromodichloromethane	75-27-4	NA	NA	60	1	2%	0.17	0.1905	1.4	8.0E+01(G)	NA	N
Bromoform	75-25-2	NA	NA	60	1	2%	0.46	0.502333	3	8.0E+01(G)	NA	N
Bromomethane	74-83-9	NA	NA	60	NA	0%	0.21	0.21	0.21	NA	NA	N
Carbon disulfide	75-15-0	NA	NA	60	1	2%	0.17	0.170833	0.22	NA	NA	N
Carbon tetrachloride	56-23-5	NA	NA	60	NA	0%	0.19	0.19	0.19	5	NA	N
Chlorobenzene	108-90-7	260000	260000	60	NA	0%	0.17	0.17	0.17	100	260000	N
Chlorodibromomethane	124-48-1	NA	NA	60	1	2%	0.17	0.217167	3	8.0E+01(G)	NA	N
Chloroethane	75-00-3	NA	NA	60	NA	0%	0.41	0.41	0.41	NA	NA	N
Chloroform	67-66-3	67000	67000	60	6	10%	0.16	0.176	0.62	8.0E+01(G)	67000	N
Chloromethane	74-87-3	NA	NA	60	NA	0%	0.3	0.3	0.3	NA	NA	N
Chloroprene	126-99-8	NA	NA	60	NA	0%	0.21	0.21	0.21	NA	NA	N
cis-1,2-Dichloroethene	156-59-2	NA	NA	60	9	15%	0.15	0.3385	2.5	70	NA	N
cis-1,3-Dichloropropene	10061-01-5	NA	NA	60	NA	0%	0.16	0.16	0.16	NA	NA	N
Dibromomethane	74-95-3	NA	NA	60	1	2%	0.17	0.1725	0.32	NA	NA	N
Dichlorodifluoromethane	75-71-8	NA	NA	60	NA	0%	0.31	0.31	0.31	NA	NA	N
Ethyl methacrylate	97-63-2	NA	NA	60	NA	0%	0.86	0.86	0.86	NA	NA	N
Ethylbenzene	100-41-4	NA	NA	60	NA	0%	0.16	0.174	1	700	NA	N
Iodomethane	74-88-4	NA	NA	60	NA	0%	0.23	0.23	0.23	NA	NA	N
Isobutanol; Isobutyl alcohol	78-83-1	NA	NA	60	NA	0%	37	37	37	NA	NA	N
m,p-Xylene	NA	NA	NA	60	1	2%	0.15	0.305	2	NA	NA	N
Methacrylonitrile	126-98-7	NA	NA	60	NA	0%	1.6	1.6	1.6	NA	NA	N
Methyl methacrylate	80-62-6	NA	NA	60	NA	0%	1.1	1.1	1.1	NA	NA	N
Methylene Chloride	75-09-2	26000	26000	60	NA	0%	0.94	0.94	0.94	5	26000	N
Propionitrile; ethyl cyanide	107-12-0	NA	NA	60	NA	0%	3.7	3.7	3.7	NA	NA	N
Styrene	100-42-5	NA	NA	60	NA	0%	0.36	0.36	0.36	100	NA	N
Tetrachloroethene	127-18-4	8900	8900	60	20	33%	0.2	0.723	7	5	8900	N
Toluene	108-88-3	110000	110000	60	1	2%	0.17	0.170333	0.19	1000	110000	N
trans-1,2-Dichloroethene	156-60-5	NA	NA	60	NA	0%	0.15	0.15	0.15	100	NA	N
trans-1,3-Dichloropropene	10061-02-6	NA	NA	60	NA	0%	0.19	0.19	0.19	NA	NA	N
trans-1,4-Dichloro-2-butene	110-57-6	NA	NA	60	NA	0%	0.8	0.8	0.8	NA	NA	N
Trichloroethene	79-01-6	440000	440000	60	27	45%	0.16	3.982667	42	5	440000	N
Trichlorofluoromethane	75-69-4	NA	NA	60	NA	0%	0.29	0.29	0.29	NA	NA	N
Vinyl acetate	108-05-4	NA	NA	60	1	2%	0.94	0.941	1	NA	NA	N
Vinyl chloride	75-01-4	NA	NA	60	NA	0%	0.1	0.1	0.1	2	NA	N

Nondetects were evaluated at the method detection limit for maximum concentration computation.

µg/L - micrograms per liter  
 COPC - chemical of potential concern  
 MCL - maximum contaminant level  
 N - no  
 NA - not applicable  
 Y - yes

**Table 5-6  
Ecological Chemicals of Potential Concern Selection  
Fort Hall Mine Landfill, Bannock County, Idaho**

Chemical	CAS	Screening Value (µg/L)	Old Screening Value (µg/L)	2020								
				Number of Samples	Number of Detects	Detection Frequency	Minimum (µg/L)	Average (µg/L)	Maximum (µg/L)	MCL (µg/L)	Screening Value (µg/L)	COPC?
1,1,1,2-Tetrachloroethane	630-20-6	NA	NA	51	NA	0%	0.21	0.21	0.21	NA	NA	N
1,1,1-Trichloroethane	71-55-6	4400000	4400000	51	NA	0%	0.16	0.16	0.16	NA	4400000	N
1,1,2,2-Tetrachloroethane	79-34-5	NA	NA	51	NA	0%	0.21	0.21	0.21	NA	NA	N
1,1,2-Trichloroethane	79-00-5	NA	NA	51	NA	0%	0.27	0.27	0.27	NA	NA	N
1,1-Dichloroethane	75-34-3	1700000	1700000	51	2	4%	0.22	0.220784	0.25	NA	1700000	N
1,1-Dichloroethene	75-35-4	130000	130000	51	NA	0%	0.23	0.23	0.23	NA	130000	N
1,1-Dichloropropene	563-58-6	NA	NA	51	NA	0%	0.19	0.19	0.19	NA	NA	N
1,2,3-Trichloropropane	96-18-4	NA	NA	51	NA	0%	0.33	0.33	0.33	NA	NA	N
1,2,4-Trichlorobenzene	120-82-1	6600	6600	51	NA	0%	0.21	0.21	0.21	NA	6600	N
1,2-Dibromo-3-Chloropropane	96-12-8	NA	NA	51	NA	0%	0.47	0.47	0.47	NA	NA	N
1,2-Dibromoethane	106-93-4	NA	NA	51	NA	0%	0.18	0.18	0.18	NA	NA	N
1,2-Dichlorobenzene	95-50-1	NA	NA	51	NA	0%	0.15	0.15	0.15	NA	NA	N
1,2-Dichloroethane	107-06-2	19000	19000	51	NA	0%	0.13	0.13	0.13	NA	19000	N
1,2-Dichloropropane	78-87-5	NA	NA	51	NA	0%	0.18	0.18	0.18	NA	NA	N
1,3-Dichlorobenzene	541-73-1	NA	NA	51	NA	0%	0.13	0.13	0.13	NA	NA	N
1,3-Dichloropropane	142-28-9	NA	NA	51	NA	0%	0.09	0.09	0.09	NA	NA	N
1,4-Dichlorobenzene	106-46-7	11000	11000	51	NA	0%	0.16	0.16	0.16	NA	11000	N
2,2-Dichloropropane	594-20-7	NA	NA	51	NA	0%	0.38	0.38	0.38	NA	NA	N
2-Butanone (MEK)	78-93-3	7900000	7900000	51	NA	0%	2	2	2	NA	7900000	N
2-Hexanone	591-78-6	NA	NA	51	NA	0%	1.7	1.7	1.7	NA	NA	N
4-Methyl-2-pentanone (MIBK)	108-10-1	NA	NA	51	NA	0%	0.98	0.98	0.98	NA	NA	N
Acetone	67-64-1	44000	44000	51	1	2%	1.9	1.907843	2.3	NA	44000	N
Acetonitrile; methyl cyanide	75-05-8	NA	NA	51	NA	0%	9.6	9.6	9.6	NA	NA	N
Acrolein	107-02-8	NA	NA	51	NA	0%	2.8	2.8	2.8	NA	NA	N
Acrylonitrile	107-13-1	NA	NA	51	NA	0%	1.4	1.4	1.4	NA	NA	N
Allyl chloride	107-05-1	NA	NA	51	NA	0%	0.17	0.17	0.17	NA	NA	N
Benzene	71-43-2	110000	110000	51	1	2%	0.16	0.166667	0.5	NA	110000	N
Bromochloromethane	74-97-5	NA	NA	51	NA	0%	0.1	0.1	0.1	NA	NA	N
Bromodichloromethane	75-27-4	NA	NA	51	NA	0%	0.17	0.17	0.17	NA	NA	N
Bromoform	75-25-2	NA	NA	51	NA	0%	0.46	0.46	0.46	NA	NA	N
Bromomethane	74-83-9	NA	NA	51	NA	0%	0.21	0.21	0.21	NA	NA	N
Carbon disulfide	75-15-0	NA	NA	51	1	2%	0.17	0.174706	0.41	NA	NA	N
Carbon tetrachloride	56-23-5	NA	NA	51	NA	0%	0.19	0.19	0.19	NA	NA	N
Chlorobenzene	108-90-7	260000	260000	51	NA	0%	0.17	0.17	0.17	NA	260000	N
Chlorodibromomethane	124-48-1	NA	NA	51	NA	0%	0.17	0.17	0.17	NA	NA	N
Chloroethane	75-00-3	NA	NA	51	NA	0%	0.41	0.41	0.41	NA	NA	N
Chloroform	67-66-3	67000	67000	51	4	8%	0.16	0.16451	0.25	NA	67000	N
Chloromethane	74-87-3	NA	NA	51	NA	0%	0.3	0.3	0.3	NA	NA	N
Chloroprene	126-99-8	NA	NA	51	NA	0%	0.21	0.21	0.21	NA	NA	N
cis-1,2-Dichloroethene	156-59-2	NA	NA	51	11	22%	0.15	0.292745	2	NA	NA	N
cis-1,3-Dichloropropene	10061-01-5	NA	NA	51	NA	0%	0.16	0.16	0.16	NA	NA	N
Dibromomethane	74-95-3	NA	NA	51	NA	0%	0.17	0.17	0.17	NA	NA	N
Dichlorodifluoromethane	75-71-8	NA	NA	51	NA	0%	0.31	0.31	0.31	NA	NA	N
Ethyl methacrylate	97-63-2	NA	NA	51	NA	0%	0.86	0.86	0.86	NA	NA	N
Ethylbenzene	100-41-4	NA	NA	51	NA	0%	0.16	0.16	0.16	NA	NA	N
Iodomethane	74-88-4	NA	NA	51	NA	0%	0.23	0.23	0.23	NA	NA	N
Isobutanol; Isobutyl alcohol	78-83-1	NA	NA	51	NA	0%	37	37	37	NA	NA	N
m,p-Xylene	NA	NA	NA	51	NA	0%	0.15	0.15	0.15	NA	NA	N
Methacrylonitrile	126-98-7	NA	NA	51	NA	0%	1.6	1.6	1.6	NA	NA	N
Methyl methacrylate	80-62-6	NA	NA	51	NA	0%	1.1	1.1	1.1	NA	NA	N
Methylene Chloride	75-09-2	26000	26000	51	NA	0%	0.94	0.94	0.94	NA	26000	N
Propionitrile; ethyl cyanide	107-12-0	NA	NA	51	NA	0%	3.7	3.7	3.7	NA	NA	N
Styrene	100-42-5	NA	NA	51	NA	0%	0.36	0.36	0.36	NA	NA	N
Tetrachloroethene	127-18-4	8900	8900	51	17	33%	0.2	0.739216	6.1	NA	8900	N
Toluene	108-88-3	110000	110000	51	NA	0%	0.17	0.17	0.17	NA	110000	N
trans-1,2-Dichloroethene	156-60-5	NA	NA	51	NA	0%	0.15	0.15	0.15	NA	NA	N
trans-1,3-Dichloropropene	10061-02-6	NA	NA	51	NA	0%	0.19	0.19	0.19	NA	NA	N
trans-1,4-Dichloro-2-butene	110-57-6	NA	NA	51	NA	0%	0.8	0.8	0.8	NA	NA	N
Trichloroethene	79-01-6	440000	440000	51	28	55%	0.16	3.973922	34	NA	440000	N
Trichlorofluoromethane	75-69-4	NA	NA	51	NA	0%	0.29	0.29	0.29	NA	NA	N
Vinyl acetate	108-05-4	NA	NA	51	NA	0%	0.94	0.94	0.94	NA	NA	N
Vinyl chloride	75-01-4	NA	NA	51	NA	0%	0.1	0.1	0.1	NA	NA	N

Nondetects were evaluated at the method detection limit for maximum

- µg/L - micrograms per liter
- COPC - chemical of potential concern
- MCL - maximum contaminant level
- N - no
- NA - not applicable
- Y - yes

**Table 5-6  
Ecological Chemicals of Potential Concern Selection  
Fort Hall Mine Landfill, Bannock County, Idaho**

Chemical	CAS	Screening Value (µg/L)	Old Screening Value (µg/L)	2021					2022				
				Number of Samples	Number of Detects	Detection Frequency	Maximum (µg/L)	COPC?	Number of Samples	Number of Detects	Detection Frequency	Maximum (µg/L)	COPC?
1,1,1,2-Tetrachloroethane	630-20-6	NA	NA	52	NA	0%	0.21	N	26	0	0%	1.2	N
1,1,1-Trichloroethane	71-55-6	4400000	4400000	52	NA	0%	0.16	N	26	0	0%	0.78	N
1,1,2,2-Tetrachloroethane	79-34-5	NA	NA	52	NA	0%	0.21	N	26	0	0%	0.42	N
1,1,2-Trichloroethane	79-00-5	NA	NA	52	NA	0%	0.27	N	26	0	0%	0.54	N
1,1-Dichloroethane	75-34-3	1700000	1700000	52	NA	0%	0.22	N	26	0	0%	0.44	N
1,1-Dichloroethene	75-35-4	130000	130000	52	NA	0%	0.23	N	26	0	0%	0.46	N
1,1-Dichloropropene	563-58-6	NA	NA	52	NA	0%	0.19	N	26	0	0%	0.83	N
1,2,3-Trichloropropane	96-18-4	NA	NA	52	NA	0%	0.33	N	26	0	0%	1.7	N
1,2,4-Trichlorobenzene	120-82-1	6600	6600	52	1	2%	0.4	N	26	0	0%	1.2	N
1,2-Dibromo-3-Chloropropane	96-12-8	NA	NA	52	NA	0%	0.47	N	26	0	0%	3.5	N
1,2-Dibromoethane	106-93-4	NA	NA	52	NA	0%	0.18	N	26	0	0%	0.81	N
1,2-Dichlorobenzene	95-50-1	NA	NA	52	NA	0%	0.15	N	26	0	0%	0.74	N
1,2-Dichloroethane	107-06-2	19000	19000	52	1	2%	0.17	N	26	0	0%	1.1	N
1,2-Dichloropropane	78-87-5	NA	NA	52	NA	0%	0.18	N	26	0	0%	1	N
1,3-Dichlorobenzene	541-73-1	NA	NA	52	NA	0%	0.13	N	26	0	0%	0.67	N
1,3-Dichloropropane	142-28-9	NA	NA	52	NA	0%	0.09	N	26	0	0%	0.76	N
1,4-Dichlorobenzene	106-46-7	11000	11000	52	NA	0%	0.16	N	26	0	0%	0.78	N
2,2-Dichloropropane	594-20-7	NA	NA	52	NA	0%	0.38	N	26	0	0%	0.76	N
2-Butanone (MEK)	78-93-3	7900000	7900000	52	NA	0%	2	N	26	0	0%	12	N
2-Hexanone	591-78-6	NA	NA	52	NA	0%	1.7	N	26	0	0%	3.4	N
4-Methyl-2-pentanone (MIBK)	108-10-1	NA	NA	52	NA	0%	0.98	N	26	0	0%	2	N
Acetone	67-64-1	44000	44000	52	NA	0%	1.9	N	26	0	0%	13	N
Acetonitrile; methyl cyanide	75-05-8	NA	NA	52	NA	0%	9.6	N	26	0	0%	19	N
Acrolein	107-02-8	NA	NA	52	NA	0%	2.8	N	26	0	0%	9.7	N
Acrylonitrile	107-13-1	NA	NA	52	NA	0%	1.4	N	26	0	0%	8.9	N
Allyl chloride	107-05-1	NA	NA	52	NA	0%	0.17	N	26	0	0%	0.34	N
Benzene	71-43-2	110000	110000	52	NA	0%	0.16	N	26	0	0%	0.62	N
Bromochloromethane	74-97-5	NA	NA	52	NA	0%	0.1	N	26	0	0%	0.81	N
Bromodichloromethane	75-27-4	NA	NA	52	NA	0%	0.17	N	26	0	0%	0.77	N
Bromoform	75-25-2	NA	NA	52	NA	0%	0.46	N	26	0	0%	2.4	N
Bromomethane	74-83-9	NA	NA	52	NA	0%	0.21	N	26	0	0%	5	N
Carbon disulfide	75-15-0	NA	NA	52	NA	0%	0.17	N	26	0	0%	1.3	N
Carbon tetrachloride	56-23-5	NA	NA	52	NA	0%	0.19	N	26	0	0%	1.1	N
Chlorobenzene	108-90-7	260000	260000	52	NA	0%	0.17	N	26	0	0%	0.84	N
Chlorodibromomethane	124-48-1	NA	NA	52	NA	0%	0.17	N	26	0	0%	1.2	N
Chloroethane	75-00-3	NA	NA	52	NA	0%	0.41	N	26	0	0%	2.7	N
Chloroform	67-66-3	67000	67000	52	1	2%	0.16	N	26	0	0%	0.72	N
Chloromethane	74-87-3	NA	NA	52	NA	0%	0.3	N	26	0	0%	1.5	N
Chloroprene	126-99-8	NA	NA	52	NA	0%	0.21	N	26	0	0%	2.3	N
cis-1,2-Dichloroethene	156-59-2	NA	NA	52	9	17%	1.7	N	26	4	15%	1.2	N
cis-1,3-Dichloropropene	10061-01-5	NA	NA	52	NA	0%	0.16	N	26	0	0%	1.3	N
Dibromomethane	74-95-3	NA	NA	52	NA	0%	0.17	N	26	0	0%	0.69	N
Dichlorodifluoromethane	75-71-8	NA	NA	52	NA	0%	0.31	N	26	0	0%	1.9	N
Ethyl methacrylate	97-63-2	NA	NA	52	NA	0%	0.86	N	26	0	0%	1.7	N
Ethylbenzene	100-41-4	NA	NA	52	NA	0%	0.16	N	26	0	0%	0.61	N
Iodomethane	74-88-4	NA	NA	52	NA	0%	0.23	N	26	0	0%	5.2	N
Isobutanol; Isobutyl alcohol	78-83-1	NA	NA	52	NA	0%	37	N	26	0	0%	73	N
m,p-Xylene	NA	NA	NA	52	NA	0%	0.15	N	26	0	0%	0.71	N
Methacrylonitrile	126-98-7	NA	NA	52	NA	0%	1.6	N	26	0	0%	11	N
Methyl methacrylate	80-62-6	NA	NA	52	NA	0%	1.1	N	26	0	0%	2.2	N
Methylene Chloride	75-09-2	26000	26000	52	NA	0%	0.94	N	26	0	0%	1.9	N
Propionitrile; ethyl cyanide	107-12-0	NA	NA	52	NA	0%	3.7	N	26	0	0%	7.4	N
Styrene	100-42-5	NA	NA	52	NA	0%	0.36	N	26	0	0%	0.71	N
Tetrachloroethene	127-18-4	8900	8900	52	14	27%	5.4	N	26	6	23%	2.9	N
Toluene	108-88-3	110000	110000	52	1	2%	0.43	N	26	0	0%	0.64	N
trans-1,2-Dichloroethene	156-60-5	NA	NA	52	NA	0%	0.15	N	26	0	0%	0.74	N
trans-1,3-Dichloropropene	10061-02-6	NA	NA	52	NA	0%	0.19	N	26	0	0%	1.3	N
trans-1,4-Dichloro-2-butene	110-57-6	NA	NA	52	NA	0%	0.8	N	26	0	0%	2.8	N
Trichloroethene	79-01-6	440000	440000	52	29	56%	29	N	26	15	58%	19	N
Trichlorofluoromethane	75-69-4	NA	NA	52	NA	0%	0.29	N	26	0	0%	1.1	N
Vinyl acetate	108-05-4	NA	NA	52	NA	0%	0.94	N	26	0	0%	1.9	N
Vinyl chloride	75-01-4	NA	NA	52	NA	0%	0.1	N	26	0	0%	1	N

Nondetects were evaluated at the method detection limit for maximum

- µg/L - micrograms per liter
- COPC - chemical of potential concern
- MCL - maximum contaminant level
- N - no
- NA - not applicable
- Y - yes

**Table 5-6  
Ecological Chemicals of Potential Concern Selection  
Fort Hall Mine Landfill, Bannock County, Idaho**

Chemical	CAS	Screening Value (µg/L)	Old Screening Value (µg/L)	2023					2024				
				Number of Samples	Number of Detects	Detection Frequency	Maximum (µg/L)	COPC?	Number of Samples	Number of Detects	Detection Frequency	Maximum (µg/L)	COPC?
1,1,1,2-Tetrachloroethane	630-20-6	NA	NA	26	0	0%	0.58	N	22	0	0%	0.58	N
1,1,1-Trichloroethane	71-55-6	4400000	4400000	26	0	0%	0.39	N	22	0	0%	0.39	N
1,1,2,2-Tetrachloroethane	79-34-5	NA	NA	26	0	0%	0.21	N	22	0	0%	0.21	N
1,1,2-Trichloroethane	79-00-5	NA	NA	26	0	0%	0.27	N	22	0	0%	0.27	N
1,1-Dichloroethane	75-34-3	1700000	1700000	26	0	0%	0.22	N	22	0	0%	0.22	N
1,1-Dichloroethene	75-35-4	130000	130000	26	0	0%	0.23	N	22	0	0%	0.23	N
1,1-Dichloropropene	563-58-6	NA	NA	26	0	0%	0.42	N	22	0	0%	0.42	N
1,2,3-Trichloropropane	96-18-4	NA	NA	26	0	0%	0.86	N	22	0	0%	0.86	N
1,2,4-Trichlorobenzene	120-82-1	6600	6600	26	0	0%	0.58	N	22	0	0%	0.58	N
1,2-Dibromo-3-Chloropropane	96-12-8	NA	NA	26	0	0%	1.8	N	22	0	0%	1.8	N
1,2-Dibromoethane	106-93-4	NA	NA	26	0	0%	0.4	N	22	0	0%	0.4	N
1,2-Dichlorobenzene	95-50-1	NA	NA	26	0	0%	0.37	N	22	0	0%	0.37	N
1,2-Dichloroethane	107-06-2	19000	19000	26	0	0%	0.54	N	22	0	0%	0.54	N
1,2-Dichloropropane	78-87-5	NA	NA	26	0	0%	0.52	N	22	0	0%	0.52	N
1,3-Dichlorobenzene	541-73-1	NA	NA	26	0	0%	0.33	N	22	0	0%	0.33	N
1,3-Dichloropropane	142-28-9	NA	NA	26	0	0%	0.38	N	22	0	0%	0.38	N
1,4-Dichlorobenzene	106-46-7	11000	11000	26	0	0%	0.39	N	22	0	0%	0.39	N
2,2-Dichloropropane	594-20-7	NA	NA	26	0	0%	0.38	N	22	0	0%	0.38	N
2-Butanone (MEK)	78-93-3	7900000	7900000	26	0	0%	6	N	22	0	0%	6	N
2-Hexanone	591-78-6	NA	NA	26	0	0%	1.7	N	22	0	0%	1.7	N
4-Methyl-2-pentanone (MIBK)	108-10-1	NA	NA	26	0	0%	0.98	N	22	0	0%	0.98	N
Acetone	67-64-1	44000	44000	26	0	0%	6.6	N	22	0	0%	6.6	N
Acetonitrile; methyl cyanide	75-05-8	NA	NA	26	0	0%	9.6	N	22	0	0%	14	N
Acrolein	107-02-8	NA	NA	26	0	0%	4.9	N	22	0	0%	4.9	N
Acrylonitrile	107-13-1	NA	NA	26	0	0%	4.5	N	22	0	0%	4.5	N
Allyl chloride	107-05-1	NA	NA	26	0	0%	0.17	N	22	0	0%	0.46	N
Benzene	71-43-2	110000	110000	26	0	0%	0.31	N	22	0	0%	0.31	N
Bromochloromethane	74-97-5	NA	NA	26	0	0%	0.4	N	22	0	0%	0.4	N
Bromodichloromethane	75-27-4	NA	NA	26	0	0%	0.39	N	22	1	5%	3	N
Bromoform	75-25-2	NA	NA	26	0	0%	1.2	N	22	2	9%	2.3	N
Bromomethane	74-83-9	NA	NA	26	0	0%	2.4	N	22	0	0%	2.4	N
Carbon disulfide	75-15-0	NA	NA	26	0	0%	0.63	N	22	0	0%	0.63	N
Carbon tetrachloride	56-23-5	NA	NA	26	0	0%	0.57	N	22	0	0%	0.57	N
Chlorobenzene	108-90-7	260000	260000	26	0	0%	0.42	N	22	0	0%	0.42	N
Chlorodibromomethane	124-48-1	NA	NA	26	0	0%	0.62	N	22	2	9%	4.6	N
Chloroethane	75-00-3	NA	NA	26	0	0%	1.4	N	22	0	0%	1.4	N
Chloroform	67-66-3	67000	67000	26	0	0%	0.36	N	22	1	5%	1	N
Chloromethane	74-87-3	NA	NA	26	0	0%	0.75	N	22	0	0%	0.75	N
Chloroprene	126-99-8	NA	NA	26	0	0%	1.2	N	22	0	0%	1.2	N
cis-1,2-Dichloroethene	156-59-2	NA	NA	26	7	27%	2.5	N	22	7	32%	2.2	N
cis-1,3-Dichloropropene	10061-01-5	NA	NA	26	0	0%	0.63	N	22	0	0%	0.63	N
Dibromomethane	74-95-3	NA	NA	26	0	0%	0.34	N	22	0	0%	0.34	N
Dichlorodifluoromethane	75-71-8	NA	NA	26	0	0%	0.96	N	22	0	0%	0.96	N
Ethyl methacrylate	97-63-2	NA	NA	26	0	0%	0.86	N	22	0	0%	0.86	N
Ethylbenzene	100-41-4	NA	NA	26	0	0%	0.3	N	22	0	0%	0.3	N
Iodomethane	74-88-4	NA	NA	26	0	0%	2.6	N	22	0	0%	2.6	N
Isobutanol; Isobutyl alcohol	78-83-1	NA	NA	26	0	0%	37	N	22	0	0%	37	N
m,p-Xylene	NA	NA	NA	26	0	0%	0.36	N	22	0	0%	0.36	N
Methacrylonitrile	126-98-7	NA	NA	26	0	0%	5.3	N	22	0	0%	5.3	N
Methyl methacrylate	80-62-6	NA	NA	26	0	0%	1.1	N	22	0	0%	1.1	N
Methylene Chloride	75-09-2	26000	26000	26	0	0%	0.94	N	22	0	0%	0.94	N
Propionitrile; ethyl cyanide	107-12-0	NA	NA	26	0	0%	3.7	N	22	0	0%	3.7	N
Styrene	100-42-5	NA	NA	26	0	0%	0.36	N	22	0	0%	0.36	N
Tetrachloroethene	127-18-4	8900	8900	26	8	31%	5.2	N	22	9	41%	3.4	N
Toluene	108-88-3	110000	110000	26	0	0%	0.32	N	22	0	0%	0.32	N
trans-1,2-Dichloroethene	156-60-5	NA	NA	26	0	0%	0.37	N	22	0	0%	0.37	N
trans-1,3-Dichloropropene	10061-02-6	NA	NA	26	0	0%	0.65	N	22	0	0%	0.65	N
trans-1,4-Dichloro-2-butene	110-57-6	NA	NA	26	0	0%	1.4	N	22	0	0%	1.4	N
Trichloroethene	79-01-6	440000	440000	26	18	69%	30	N	22	16	73%	21	N
Trichlorofluoromethane	75-69-4	NA	NA	26	0	0%	0.57	N	22	0	0%	0.57	N
Vinyl acetate	108-05-4	NA	NA	26	0	0%	0.94	N	22	0	0%	0.94	N
Vinyl chloride	75-01-4	NA	NA	26	0	0%	0.51	N	22	0	0%	0.51	N

Nondetects were evaluated at the method detection limit for maximum

- µg/L - micrograms per liter
- COPC - chemical of potential concern
- MCL - maximum contaminant level
- N - no
- NA - not applicable
- Y - yes

**Table 6-1  
2025 Offsite Groundwater Sampling Plan  
Fort Hall Mine Landfill, Bannock County, Idaho**

Well Group	Well ID	Sample Method	Sample Schedule	Target Sample Depth (feet btoc)	Minimum Purge Volume (gal)	Sampled in Summer 2024	2025 Sampling Planned	Field Parameters <sup>+</sup>	VOCs Method 8260D
Bannock County Monitoring	MW-116S	Passive <sup>+</sup>	Annual	85.5	0.9	No	X	X	X
City of Pocatello Monitoring	PA-1	Passive	Annual	138.5	NA	Yes	X	X	X
City of Pocatello Monitoring	PA-3	Passive	Annual	58.8	NA	Yes	X	X	X
City of Pocatello Monitoring	PA-4	Passive	Annual	103.8	NA	Yes	X	X	X
City of Pocatello Monitoring	PA-8	Passive	Annual	80.8	NA	Yes	X	X	X
Domestic Supply	RW-2076F	Offsite tap	Annual	89	113	Yes	X	X	X
Domestic Supply	RW-2140H	Offsite tap	Annual	195	400	No*	X	X	X
Domestic Supply	RW-2151H	Offsite tap	Annual	180	300	Yes	X	X	X
Domestic Supply	RW-2172F	Offsite tap	Biannual	110	100	No	X	X	X
Domestic Supply	RW-2172H	Offsite tap	Annual	165	300	Yes	X	X	X
Domestic Supply	RW-2213F	Offsite tap	Annual	NA	200	Yes	X	X	X
Domestic Supply	RW-2237H	Offsite tap	Annual	100	300	Yes	X	X	X
Domestic Supply	RW-7200P	Offsite tap	Biannual	133	90	No	X	X	X
Domestic Supply	RW-7505P	Offsite tap	Annual	NA	300	Yes	X	X	X
Domestic Supply	RW-7549P	Offsite tap	Biannual	NA	300	No	X	X	X
Domestic Supply	RW-7677P	Offsite tap	Annual	59	100	Yes	X	X	X
Domestic Supply	RW-7773P	Offsite tap	Biannual	120	100	No	X	X	X
Domestic Supply	RW-8012P	Offsite tap	Biannual	90	200	No	X	X	X
Domestic Supply	RW-8030P	Offsite tap	Annual	92	200	Yes	X	X	X
Domestic Supply	RW-8048P	Offsite tap	Annual	150	300	Yes	X	X	X
Domestic Supply	RW-8284P	Offsite tap	Annual	100	300	Yes	X	X	X
Domestic Supply	RW-2203H	Passive	Annual	75	NA	Yes	X	X	X
City of Pocatello Municipal Supply	Muni-Well-14	Offsite tap	Biannual	82	NA	Yes			
City of Pocatello Municipal Supply	Muni-Well-33	Offsite tap	Biannual	115	NA	Yes			

**Notes**

\*One well was not sampled during the summer 2024 events because access was not granted to the property.

<sup>+</sup>Field parameters include pH, oxidation-reduction potential, turbidity, dissolved oxygen, specific conductance, and temperature.

<sup>+</sup>Sampling method is dependent on property owner permission.

**Abbreviations**

> - greater than

feet btoc - feet below top of casing

gal - gallons

NA - not applicable

NM - not measured

VOCs - volatile organic compounds

X - planned